


C1-mini-LC is an LED spotlight for installation on magnetic track, suitable for showcase lighting in museum and retail settings. It is 360° rotatable, 90° swivelling and is available with a variety of optics, 5 color temperatures and 3 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	1W (12VDC)
<b>Power Supply</b>	Remote - See Magnetic Track Sheet
<b>Dimming</b>	Individual Dimming Not Available See page 3 for dimming driver options
<b>Construction</b>	Body: Anodized Aluminum
<b>CCT</b>	2700K, 3000K, 3500K, 4000K, 5700K
<b>CRI</b>	>90
<b>Delivered Lumens</b>	60 lm (3000K, 30°)
<b>Efficacy</b>	60 lm/W (3000K, 30°)
<b>Optics</b>	7 Standard 15° Glass Lens – Aspherical w/ Light Diffusion Foil
<b>Finishes</b>	2 Standard, See Below
<b>Fixture Dimensions</b>	Ø0.55" x 1.50"
<b>Lumen Maintenance</b>	L80,B10 >50,000hrs
<b>IP Rating</b>	IP20

Fixture Dimensions

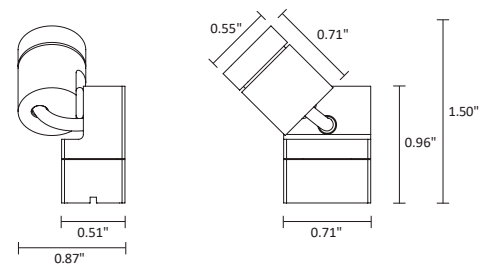


**NOTE: Track to be ordered separately**

## ORDERING INFORMATION

Example: C1-MINI-LC-10-40-18-SW. Accessories / Power Supplies ordered separately.

C1-MINI-LC	-	10	-		-		-		
Model No.	Wattage	CCT	Optics	Finish					
C1-MINI-LC (A400009)	10 - 1W	27 - 2700K	15 - 15° *	SW - Anodized Black					
		30 - 3000K	18 - 18°	SI - Silver					
		35 - 3500K	26 - 26°	Custom RAL (min. 10)					
		40 - 4000K	30 - 30°	CH - Champagne					
		57 - 5700K	45 - 45°	HA - Hard Anodized					
			80 - 80°	GO - Gold					
			47 - 47°+25°	RAL - Custom RAL					
			40 - 40°+10°						

\* GLASS LENS – ASPHERICAL WITH LIGHT DIFFUSION FOIL, SEE ACCESSORIES PAGE

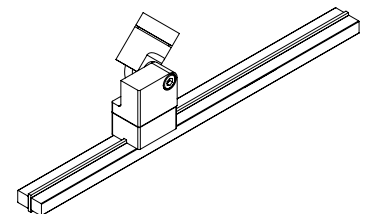


Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - OPTIONAL



**Honeycomb Grid**  
A000600



**\*15° Glass Lens**  
A000500-S  
Aspherical with Light Diffusion Foil  
and Lens Holder



**Anti-Glare Tube**  
A300016 - \_\_\_  
SI - silver  
SW - black  
CH - champagne (min. 10)  
HA - hard anodized (min. 10)  
GO - gold (min. 10)  
RAL - custom RAL (min. 10)



**Inclined Tube**  
A300019 - \_\_\_  
SI - silver  
SW - black  
CH - champagne (min. 10)  
HA - hard anodized (min. 10)  
GO - gold (min. 10)





**Barn Door**  
A300020 - \_\_\_  
SI - silver  
SW - black  
RAL - custom RAL (min. 10)

**See separate sheet  
for Magnetic Track.  
Consult factory for  
Remote Power  
Supply for Magnetic  
Track.**

## PHOTOMETRIC DATA

for light color 3000K // standard lens 30° // color rendering index typ. 97, R9 > 90, R12 > 90 // color variation ≤ 3 SDCM

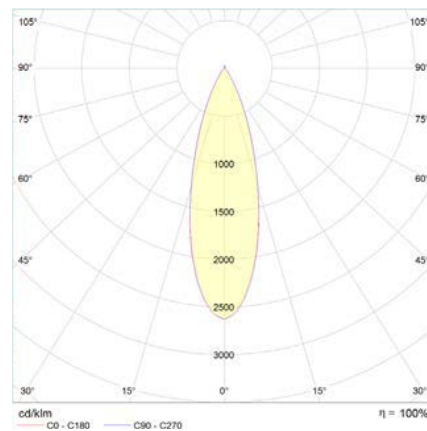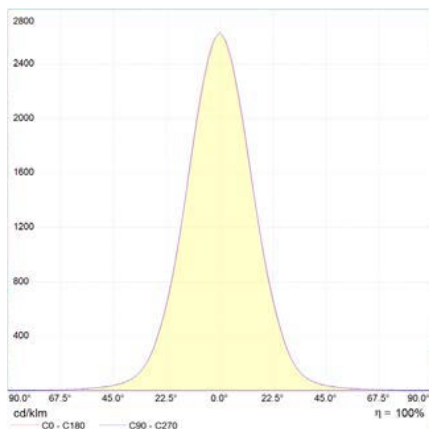

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

12VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00162</a>	Non-Dim	120-277VAC to 12VDC, 20W, Class 2, IP64	1-16
<a href="#">PPLT00652</a>	0-10V Dimming	120-277VAC to 12VDC, 30W, Class 2	1-24
<a href="#">PPLT00654</a>	0-10V Dimming	120-277VAC to 12VDC, 50W, Class 2	1-40
<a href="#">PPLT00134</a>	Non-Dim	120-277VAC to 12VDC, 60W, Class 2, IP64	1-48

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation: