


C1-MINI-S-VL

C1-mini-S-VL is an LED spotlight for installation in display cases, suitable for showcase lighting in museum and retail settings. It is 360° rotatable, 135° swivelling, has an attachment with mounting flange and is available with a variety of optics, 5 color temperatures and 2 standard finishes.

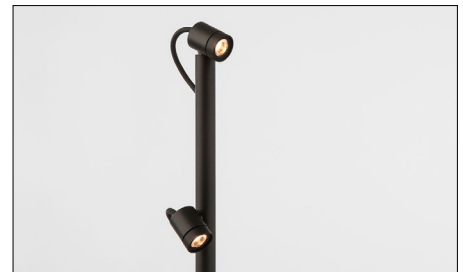

Variations with 2 or 3 heads on request.

TECHNICAL DATA

Wattage / Input	1.8W (600mA)
Power Supply	Remote, not included. See page 2.
Dimming	Dimming by Remote Driver - See page 2 (Not Suitable for Dimming Pen)
Construction	Body: Anodized Aluminum
CCT	2700K, 3000K, 3500K, 4000K, 5700K
CRI	>90
Delivered Lumens	130 lm (3000K, 30°)
Efficacy	72.2 lm/W (3000K, 30°)
Optics	8 Standard 15° Glass Lens – Aspherical w/ Light Diffusion Foil
Finishes	2 Standard, See Below
Fixture Dimensions	Ø0.55" x 0.71" (head) Ø0.39" (base) Standard extension max. 17.32" (max. visible length 15.75") - can be shortened on request Additional height adjustable via flange Panel thickness 0.08" - 0.91" Borehole Ø 0.57"
Lumen Maintenance	L80,B10 >50,000hrs
IP Rating	IP20

ORDERING INFORMATION



Example: C1-MINI-S-VL-18-40-18-SI. Accessories / Power Supplies ordered separately.

C1-MINI-S-VL	-	18	-		-		-	
--------------	---	----	---	--	---	--	---	--

Model No.	Wattage	CCT	Optics	Finish
C1-MINI-S-VL (A400013)	18 - 1.8W	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 57 - 5700K	15 - 15° * 18 - 18° 26 - 26° 30 - 30° 45 - 45° 80 - 80° 47 - 47°+25° 40 - 40°+10°	SW - Anodized Black SI - Silver <u>Custom (min. 10)</u> CH - Champagne HA - Hard Anodized GO - Gold BR - Mocha Bronze RAL - Custom RAL

* GLASS LENS – ASPHERICAL WITH LIGHT DIFFUSION FOIL, SEE ACCESSORIES PAGE

Fixture Dimensions

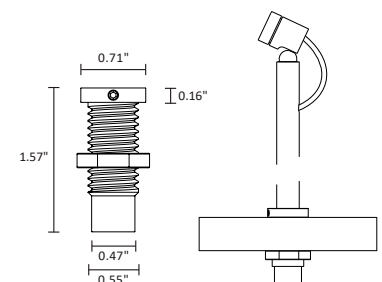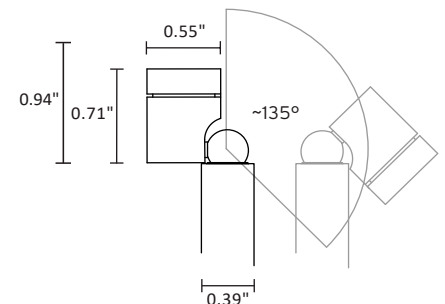


Job Name/Date:

Fixture Type Designation:

ACCESSORIES



Honeycomb Grid
A000600



Anti-Glare Tube

A300016 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)
RAL - custom RAL (min. 10)



Inclined Tube

A300019 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
BR - mocha bronze (min. 10)



Barn Door

A300020 - ____
SI - silver
SW - black
RAL - custom RAL (min. 10)

*15° Glass Lens

A000500-S
Aspherical with Light Diffusion Foil
and Lens Holder

SUGGESTED POWER SUPPLIES



600mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 600mA, 50W, Class 2, DAMP	1-16

For other power supply options consult factory.

PHOTOMETRIC DATA

for light color ~3,000K | standard lens 30° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

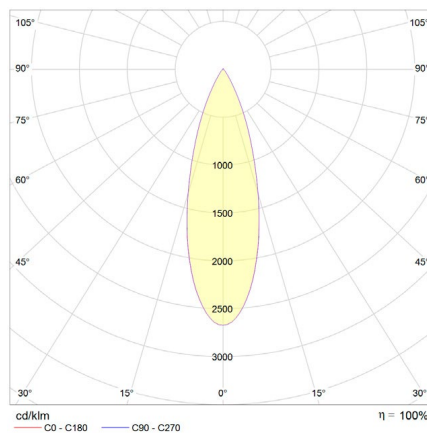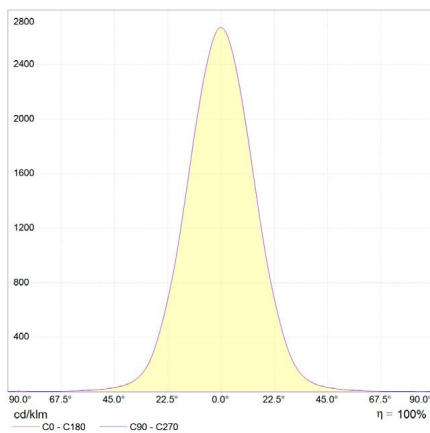

Job Name/Date:

Fixture Type Designation: