


C1-mini-S is an LED spotlight for installation in display cases, suitable for showcase lighting in museum and retail settings. It is 360° rotatable, 135° swivelling with screw base or magnetic base and available with a variety of optics, 5 color temperatures and 2 standard finishes.

TECHNICAL DATA


Wattage / Input	1.8W (600mA)
Power Supply	Remote, not included. See page 2.
Dimming	Dimming by Remote Driver - See page 2 (Not Suitable for Dimming Pen)
Construction	Body: Anodized Aluminum
CCT	2700K, 3000K, 3500K, 4000K, 5700K
CRI	>90
Delivered Lumens	130 lm (3000K, 30°)
Efficacy	72.2 lm/W (3000K, 30°)
Optics	7 Standard 15° Glass Lens – Aspherical w/ Light Diffusion Foil
Finishes	2 Standard, See Below
Fixture Dimensions	Ø0.55" x 0.71" (head) Ø0.39" x 0.79" (magnetic base) Ø0.39" x 0.75" (screw base)
Lumen Maintenance	L80, B10 >50,000hrs
IP Rating	IP20




Fixture Dimensions



magnetic base

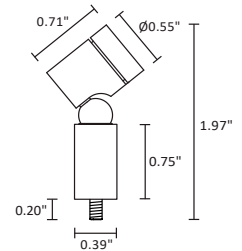

screw base



ORDERING INFORMATION

Example: C1-MINI-S-18-40-18-SI-M. Accessories / Power Supplies ordered separately.

C1-MINI-S	-	18	-		-		-	
Model No.	Wattage	CCT	Optics	Finish	Base			
C1-MINI-S (A400012)	18 - 1.8W	27 - 2700K 30 - 3000K 35 - 3500K 40 - 4000K 57 - 5700K	15 - 15° * 18 - 18° 26 - 26° 30 - 30° 45 - 45° 80 - 80° 47 - 47°+25° 40 - 40°+10°	SW - Anodized Black SI - Silver <u>Custom RAL (min. 10)</u> CH - Champagne HA - Hard Anodized GO - Gold RAL - Custom RAL	M - Magnetic S - Screw			

* GLASS LENS – ASPHERICAL WITH LIGHT DIFFUSION FOIL,

* GLASS LENS – ASPHERICAL WITH LIGHT DIFFUSION FOIL,
SEE ACCESSORIES PAGE


Job Name/Date:

Fixture Type Designation:

ACCESSORIES



Honeycomb Grid
A000600



***15° Glass Lens**
A000500-S
Aspherical with Light Diffusion Foil
and Lens Holder



Anti-Glare Tube
A300016 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)
RAL - custom RAL (min. 10)



Inclined Tube
A300019 - ____
SI - silver
SW - black
CH - champagne (min. 10)
HA - hard anodized (min. 10)
GO - gold (min. 10)



Barn Door
A300020 - ____
SI - silver
SW - black
RAL - custom RAL (min. 10)

SUGGESTED POWER SUPPLIES




600mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 600mA, 50W, Class 2, DAMP	1-16

For other power supply options consult factory.

PHOTOMETRIC DATA

for light color ~3,000 K | standard lens 30° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

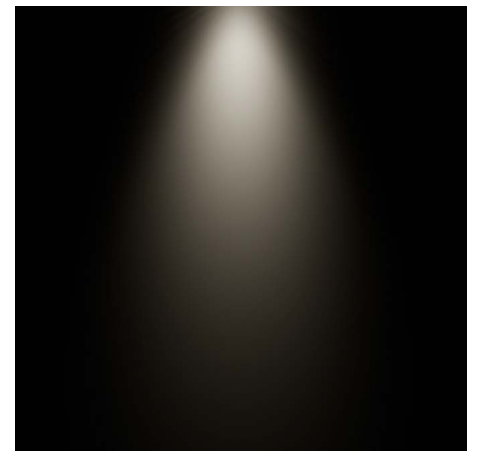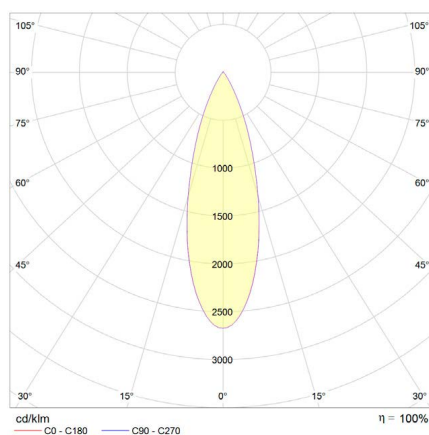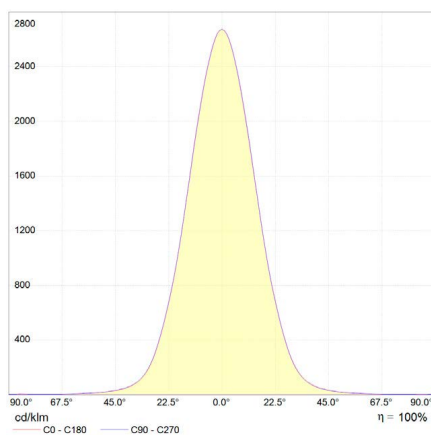

Job Name/Date:

Fixture Type Designation: