


C1-STS is an LED spotlight for installation on magnetic track, suitable for showcase lighting in museum and retail settings. It is 180° rotatable, 90° swivelling, with screw base or magnetic base and available with a variety of optics, 5 color temperatures and 3 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	2W (12VDC)
<b>Power Supply</b>	Remote - See Track Magnetic Sheet
<b>Dimming</b>	On Board with Dimming Pen (included) Uses Dimming Pen for Individual Dimming
<b>Construction</b>	Body: Anodized Aluminum
<b>CCT</b>	2700K, 3000K, 3500K, 4000K, 5700K
<b>CRI</b>	>97
<b>Delivered Lumens</b>	110 lm (2W, 3000K, 20°)
<b>Efficacy</b>	55 lm/W (3000K, 20°)
<b>Optics</b>	6 Standard, See Below
<b>Finishes</b>	3 Standard, See Below
<b>Fixture Dimensions</b>	Ø1.04" x 1.28" (head) 0.79" x 0.98" (base)
<b>Lumen Maintenance</b>	L80,B10 >50,000hrs
<b>IP Rating</b>	IP20

Fixture Dimensions

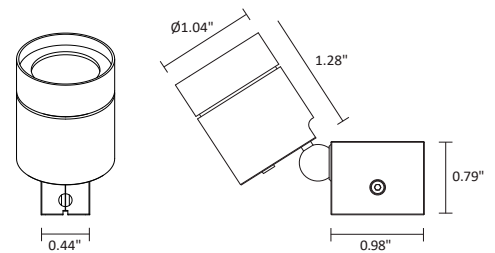


**NOTE: Track to be ordered separately**

## ORDERING INFORMATION

Example: C1-STS-20-40-35-G. Accessories / Power Supplies ordered separately.

C1-STS	-	20	-		-		-		
Model No.	Wattage	CCT	Optics	Finish					
C1-STS	20 - 2W	27 - 2700K	10 - 10°	B - Anodized Black					
		30 - 3000K	15 - 15°	S - Silver					
		35 - 3500K	20 - 20°	G - Gold					
		40 - 4000K	35 - 35°	C - Custom RAL					
		57 - 5700K	45 - 45°	(consult factory for "C")					
			46 - 46°+10°						



Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - OPTIONAL



**Honeycomb Grid**  
A000602



**Anti-Glare Tube**  
A300042-\_\_  
SI - Silver  
SW - Black  
CH - Champagne  
HA - Hard Anodized  
GO - Gold  
RAL - Custom RAL



**Inclined Tube**  
A300044-\_\_  
SI - Silver  
SW - Black  
CH - Champagne  
HA - Hard Anodized  
GO - Gold



**Light Diffusion Foil**



**Barn Door**  
A300045-\_\_  
SI - Silver  
SW - Black  
RAL - Custom RAL



**Zoom Optic (6° - 36°)**  
A300134-\_\_  
SI - Silver  
SW - Black  
CH - Champagne  
HA - Hard Anodized  
GO - Gold  
**Zoom Optic (2° - 25°)**  
A300165-\_\_  
SI - Silver  
SW - Black  
CH - Champagne  
HA - Hard Anodized  
GO - Gold

**See separate sheet for Magnetic Track. Consult factory for Remote Power Supply for Magnetic Track.**

Job Name/Date:

Fixture Type Designation:



## DIMMING

The LED spotlight is controlled by a microcontroller and can be dimmed individually using a button (1) on the spotlight head. Pressing on the dimming button (> 1 sec.) changes the dimming value. Releasing the button stops the dimming process. Pressing it again changes the dimming direction. Your set dimming is automatically saved after approx. 5 - 10 seconds. The dimming range is flicker-free adjustable from 100% to 10% in 256 steps. The spotlight is set to 100% at initial start-up.



## PHOTOMETRIC DATA

for light color ~3,000 K | standard lens 20° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

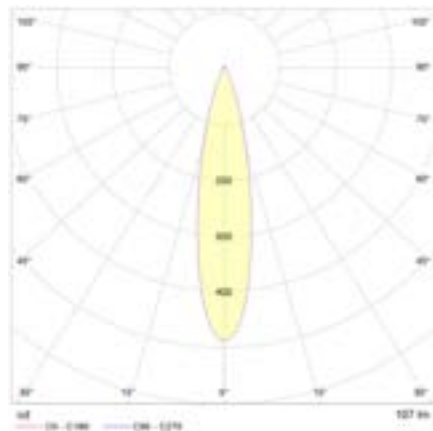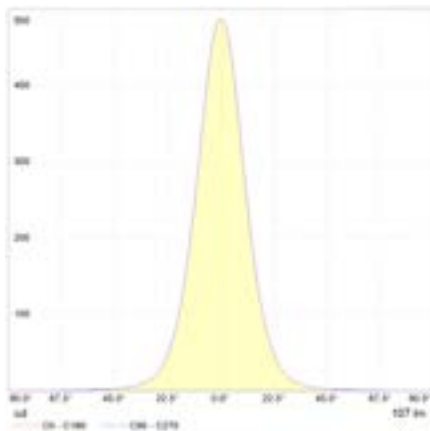

Job Name/Date:

Fixture Type Designation: