



LED spotlight C1-VL

description:

LED spotlight for installation in display cases,
180° rotatable, 125° swiveling,
attachment with mounting flange

housing color:

aluminum anodized black, silver, gold
(other surface finishing on request)

optics:

10°, 15°, 20°, 35°, 45°, 80°, 46°+ 10°

light color (+/- 100K):

2700K, 3000K, 3500K, 4000K, 5700K

high power LED, high CRI DIN EN 55015:2013,

lifetime 50,000 hours | basis of lifetime L80B10

max. luminous flux (3000K | standard lens 20°):

150 lm at 2.1W (71 lm/W)

power input: constant current up to max. 700 mA

remote driver required:

see datasheet


dimming: see drivers

protection class: IP20

optional accessory:

honeycomb grid, anti-glare tube, inclined tube,
light diffusion foil, barn door,
zoom optic (2° - 25°, 6° - 36°)

dimensions

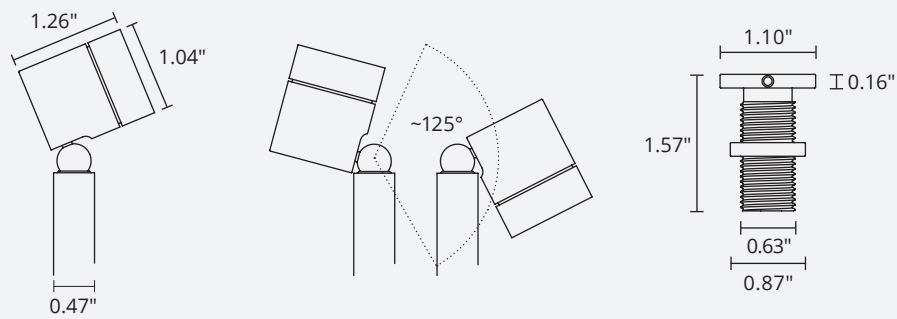

Pole height up to 31.5" (800 mm)

specification in inches

photometry

for light color 3000K | standard lens 20° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

