



LED spotlight C1-mini-C Casambi Control

description:

LED spotlight for installation on magnetic track,
360° rotatable, 90° swivelling

housing color:

aluminum anodised black, silver, gold
(other surface finishing on request)

optics:

8°, 15°, 18°, 26°, 30°, 45°, 80°, 47°+25°, 40°+10°

light color (+/- 100K):

2700K, 3000K, 3500K, 4000K, 5700K

high power LED, high CRI DIN EN 55015:2013,
lifetime 50,000 hours | basis of lifetime L80B10

protection class: IP 20, protection class III, CE,
ETSI EN 300 328 V2.2.2

max. luminous flux (3000 K | standard lens 30°):

160 lm at 2.5 W (64 lm/W)


power input: 9 - 24 VDC**remote driver required:**

See datasheet for 12 VDC constant voltage

dimming: via Casambi-App**accessory:** magnetic track

optional accessory: magnetic track holders,
honeycomb grid, anti-glare tube, inclined tube,
snoot (8°), light diffusion foil, barn door,
zoom optic (9° - 33°)




dimensions

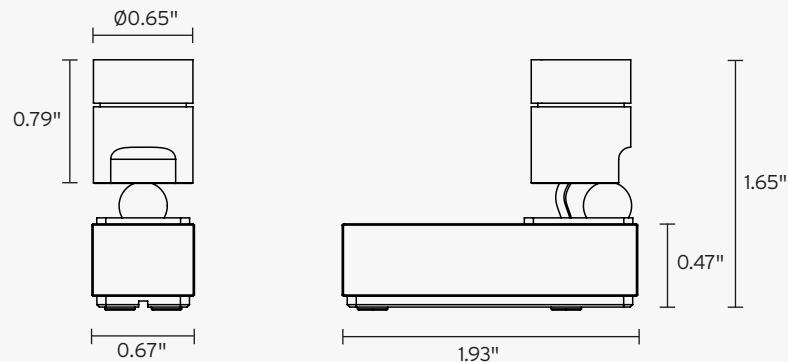

specification in inches

photometry

for light color 3000 K | standard lens 30° | color rendering index typ. 97, R9 > 90, R12 > 90 | color variation ≤ 3 SDCM

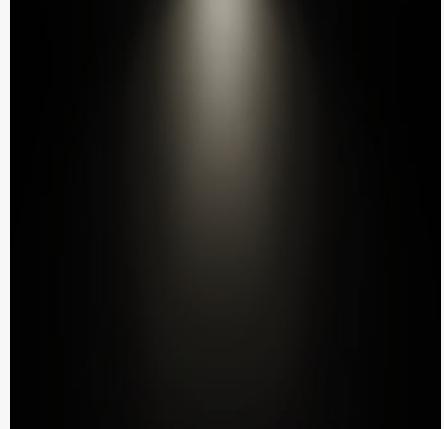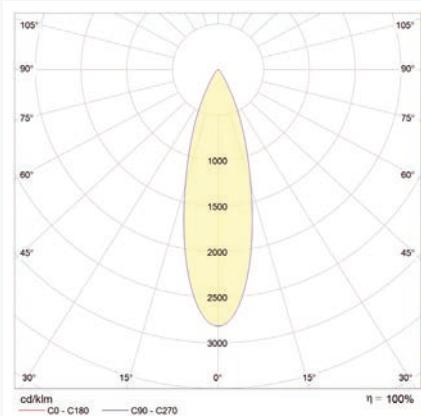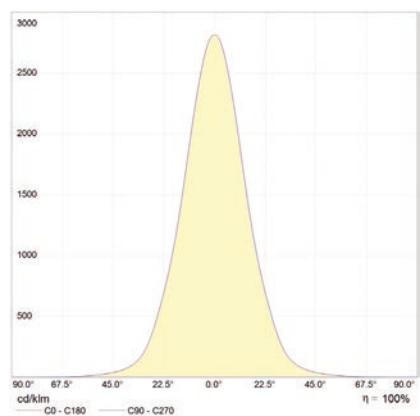

Dimming

The C1-mini-C spotlight is controlled via the Casambi app. The set value is automatically saved and retained even after a power cut. The dimming range has 810 steps (flicker-free) from 100% to 0.4%. The dimming frequency is 19.75 kHz.

The Casambi app can be freely downloaded from the App Store or Google Play. After opening, the app automatically finds all Casambi-operated spotlights.

Tap on *Add All luminaires to ... / My network*. All spotlights are connected into a network and the *Luminaires* menu opens automatically. (To switch on or off - tap the symbol; to dim - swipe horizontally over the symbol)

