

The Centaur C1X is a 1" diameter ingrade uplight made of stainless steel that is suitable for power washing and is driveover rated up to 11,000 lbs.

## TECHNICAL DATA

Wattage / Input	1W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body and Trim: Stainless Steel 304 Alloy Jbox: Cast Stainless Steel Lens: 0.4" Clear, Frosted or Internally Ceramic Coated Tempered Glass Lens Frame: Threaded Bottlecap
CCT	3000K, 5000K
CRI	>80
Delivered Lumens	44 lm (3000K, 24VDC)
Efficacy	44 lm/W
Optics	0°, 6°, 25°
Finishes	Stainless Steel 304 Alloy
Fixture Dimensions	Ø1.0" x 4.0" h
LED Source	1 Cree XPE LED
IP Rating	IP68, IP69
Driveover Rated	11,000 lbs



Fixture Dimensions  
Ø1.0" x 4.0" h  
See Full Drawing on page 2

## ORDERING INFORMATION

Example: C1X-L-150-4-SS-1-X-T-00. Power Supplies ordered separately.

C1X-L -  - 4 -  - SS -  - X -  -  - 00

Model #	Wattage/CCT	Body	Finish	Optics	Driver	Lens	Options
C1X-L	130 -1W, 3000K 150 -1W, 5000K	4 - Recessed box with conduit entries	SS - Stainless Steel	1 - 6° 2 - 25° 0 - None	X - Remote See p.2 to specify Note: 0-10V on board dimming included	T - Clear Tempered K - Internally Ceramic Coated G - Frosted Tempered Glass	00 - None Note: Optic options 1 and 2 can only be used with "T" lens. Optic 0 (None) can only be used with 'K' or 'G' lens.

Job Name/Date:

Fixture Type Designation:

**SUGGESTED POWER SUPPLIES**

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00155</a>	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-24
<a href="#">PPLT00586</a>	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-32
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-80

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC , 96W, Class 2	1-76



For other power supply options consult factory.

**NOTE: 0-10V DIMMING INTERFACE INCLUDED - to be wired separately**


Job Name/Date:

Fixture Type Designation:


## Fixture Dimensions

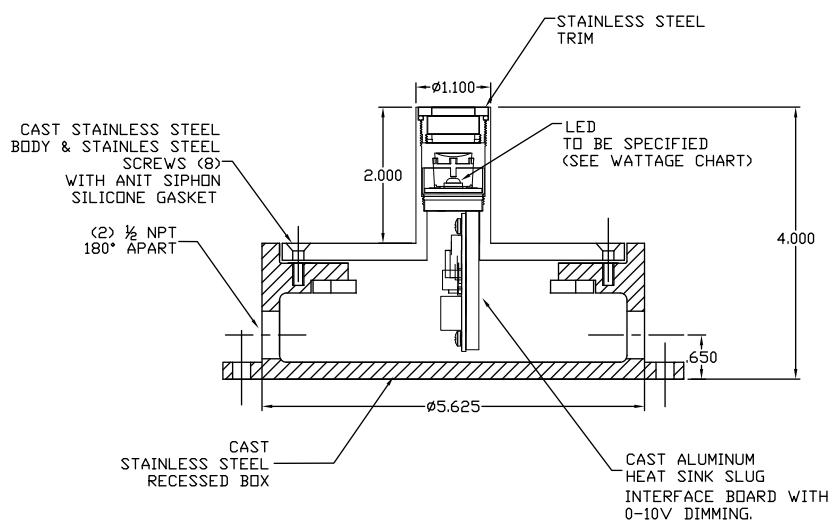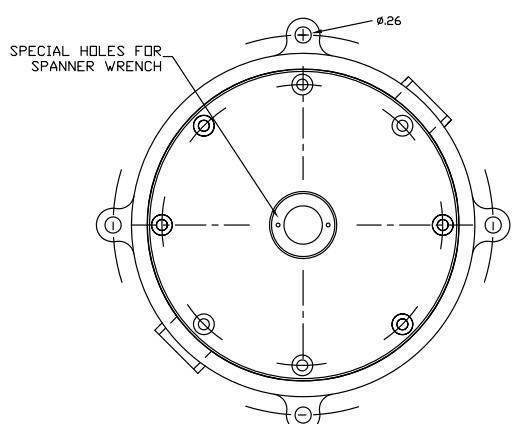

## Accessories - Installation



**LL301** - Optional  
Leveling Pad  
Set of 4



Job Name/Date:

Fixture Type Designation: