

The Centaur C2C is a 2.5" diameter ingrade uplight made of stainless steel that is suitable for power washing and is driveover rated up to 11,000 lbs. Available in RGBW or tunable white.

TECHNICAL DATA

Wattage / Input	5W (24VDC)
Power Supply	Remote, not included. See page 2.
DMX Control	Internal DMX Factory Set
Construction	Body/Trim: Stainless Steel 304 Alloy Jbox: Cast Stainless Steel Lens: 0.4" Clear, Frosted or Internally Ceramic Coated Tempered Glass Lens Frame: Threaded Bottlecap
CCT	RGBW, Tunable White
CRI	>80
Optics	0°, 10°, 30°
Finishes	Stainless Steel 304 Alloy
Fixture Dimensions	Ø2.5" x 4.0" h
LED Source	Cree MCE LED
IP Rating	IP68, IP69
Driveover Rated	11,000 lbs



Fixture Dimensions
Ø2.5" x 4.0" h
See Full Drawing on page 2

ORDERING INFORMATION

Example: C2C-L-5RW-4-SS-1-X-T-0. Power Supplies ordered separately.

C2C-L	-		-	4	-	SS	-		-	X	-		-	0
Model #	CCT	Body	Finish	Optics	Driver	Lens	Options							
C2C-L	5RW - 5W-RGBW 5TW - 5W-Tunable White	4 - Recessed box with conduit entries	SS - Stainless Steel	0 - None 1 - 10° 2 - 30°	X - Remote See p.2 to specify <i>Note: Unit equipped with integral DMX interface</i>	T - Clear Tempered Glass G - Frosted Tempered Glass K - Flash White BTM & Clear Top Q - Non-Skid Patterned Tempered Glass J - Flash White Bottom & Non-Skid Top Pattern	0 - None							

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC - for RGBW with integrated DMX


Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-16

For other power supply options consult factory.


SUGGESTED POWER SUPPLIES

Tunable White - Consult Factory


Fixture Dimensions

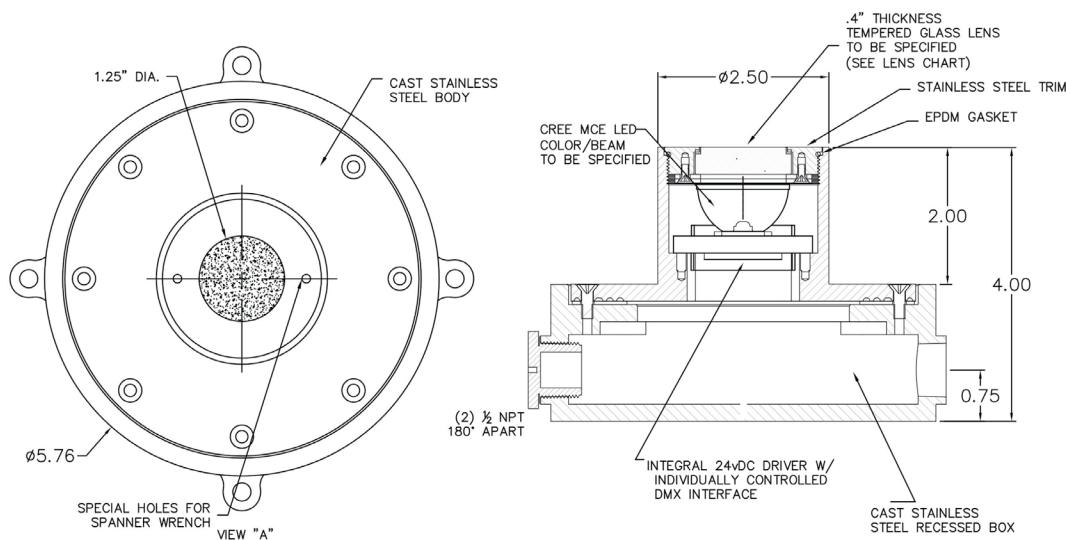

ACCESSORIES - Installation



LL301 - Optional
Leveling Pad
Set of 4



Job Name/Date:

Fixture Type Designation: