

CDX is a wet label in-grade upright with an integral driver that is suitable for power washing. It comes in 3 color temperatures and a stainless steel finish. It is driveover and walkover rated for up to 11,000 lbs. The static white driver is capable of 3 dimming protocols.

TECHNICAL DATA

Wattage / Input	12W (120-277VAC)
Power Supply	Integral (0-10V Dimming)
Dimming	0-10V, ELV, Triac Dimming on Static White
Construction	Body: Cast Stainless Steel 304 Alloy Lens: 0.4" Thick, Clear, Non-Skid or Frosted Tempered Glass Lens Frame: Threaded "Bottle Cap"
CCT	3000K, 3500K, 4000K
CRI	CRI>80
BUG Rating	B0-U4-G0
Delivered Lumens	981 lm (3500K)
Efficacy	54.5 lm/W
Optics	40° Reflector
Finishes	Stainless Steel
Fixture Dimensions	Ø5.75" x 5.25" h
LED Source	XICATO LED MODULE
IP Rating	IP68, IP69
Driveover Rated	11,000 lbs (30mph)



Fixture Dimensions
Ø5.75" x 5.25" h
See Full Drawing on page 2

ORDERING INFORMATION


Example: CDX-L-EY-4-SS-1-L-Q-W. Accessories sold separately.

CDX-L	-		-	4	-	SS	-	1	-	L	-		-	
Model #	CCT	Body	Finish	Grill/Face	Driver	Glass Lens	Options							
CDX-L	EX - 3000K EY - 3500K EZ - 4000K	4 - Fully Recessed	SS - Stainless Steel	1 - Standard	L - 120-277V with Integral 0-10V Dimming <i>Note: ELV and Triac 120V only</i>	T - Clear Tempered Q - Clear Tempered Glass w/ Anti-Skid Pattern G - Frosted Tempered Note: Rubber Lens Holder PPG00274 included w/ options	0 - None W - Linear Spread H - Honeycomb Louver S - Solite Lens B - Special Lens (see drawing) A - Anti-Glare Shield							

Job Name/Date:

Fixture Type Designation:

FIXTURE DIMENSIONS

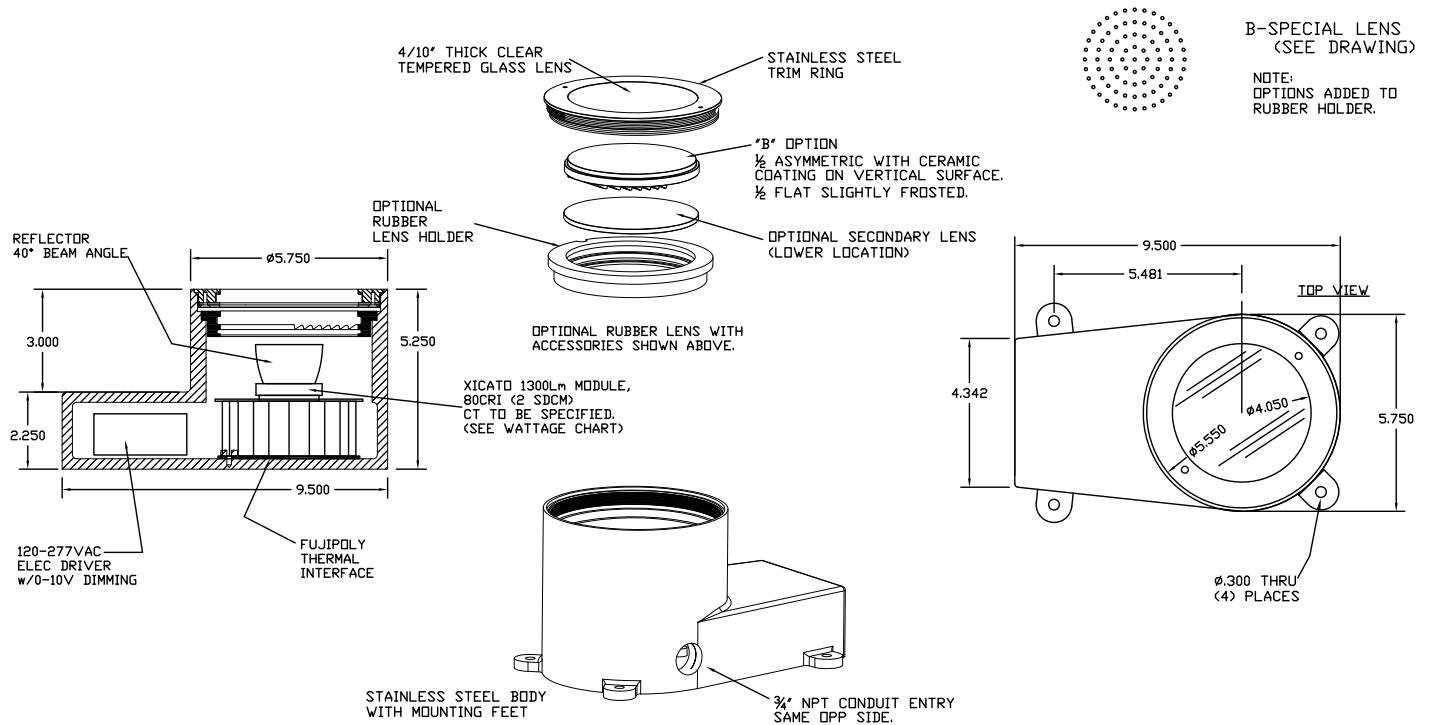


ACCESSORIES


Installation



LL301 - Optional Leveling Pad
Set of 4



Anti-Glare



PPDG0028001*
Anti-Glare Shield - Ø4.2"
*include as an option in ordering matrix


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note all Photometry is 3500K

Maximum Candela = 878

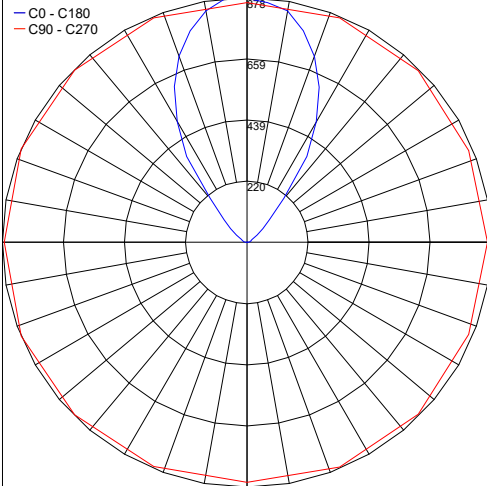

PHOTOMETRIC FILENAME : CDX LED 18W 35K TEMP GL (CDX-LEY4SS1LT0).IES

Maximum Candela = 618

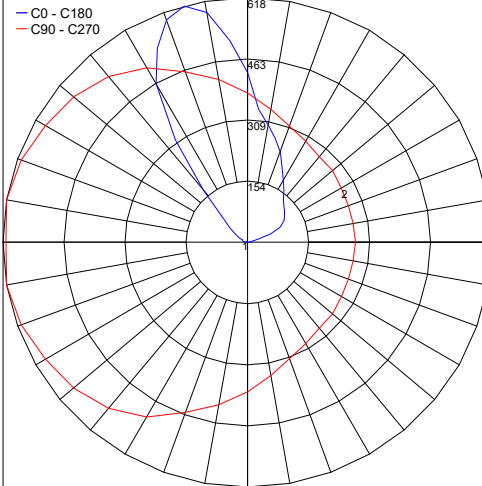

PHOTOMETRIC FILENAME : CDX LED 18W 35K TEMP GL_ASYM LENS (CDX-L-EY4SS1LTB).IES

Job Name/Date:

Fixture Type Designation: