

# CTR DOWNLIGHT

designplan®

datasheet

The CTR downlight is a vandal resistant, IP65 wet label downlight suitable for steam rooms that is IC and Chicago Plenum rated. It is available in RGBW or tunable white with 2 optics options.

## TECHNICAL DATA

<b>Wattage / Input</b>	RGBW w/ Integrated DMX - 5W (24VDC) Tunable White
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: 20 Ga. Cold Rolled Steel (Powder Black Finish) Neck: Die Cast Aluminum Lens: 3/16" Thick Clear or Opal Polycarbonate
<b>CCT</b>	RGBW, Tunable White (1650K - 8000K)
<b>CRI</b>	90
<b>Delivered Lumens</b>	—
<b>Efficacy</b>	—
<b>Optics</b>	25°, 35°
<b>Finishes</b>	5 Standard, plus 4 Marine Grade. See Below.
<b>Fixture Dimensions</b>	Ø3.4" x 6.0 l x 5.7 h (see drawing on page 2)
<b>Aperature</b>	Ø1.3"
<b>LED Source</b>	CREE LED (RGBW)
<b>IP Rating</b>	IP65



MADE IN THE U.S.A.

Fixture Dimensions  
(see drawing on page 2)

## ORDERING INFORMATION


Example: CTR-L26-RW-25-4-MTS-C-RMT-0. Power Supplies ordered separately.

CTR-L26	-		-		-		-	RMT	-	
<b>Model #</b>	<b>CCT</b>	<b>Optics</b>	<b>Body</b>	<b>Finish</b>	<b>Lens</b>	<b>Dimming</b>	<b>Options</b>			
CTR-L26	RW - RGBW+ Tunable White (1650K-8000K)	25 - 25° 35 - 35°	4 - Fully Recessed IC Rated C - Fully Recessed Chicago Plenum V - Concrete Pour	11 - White Suede 02 - Black Suede 18 - Tex. Bronze TS - Silver <i>Add prefix "M" to above colors for Marine Grade Clear Overcoat</i>  PN - Polished Nickel <i>Marine Grade Clear Overcoat NOT available on Polished Nickel</i>	C - Clear X - Opal	RMT - Remote Required (See page 2 for power supply options)	0 - None 4 - One Circuit Fusing			


Job Name/Date:

Fixture Type Designation:

## Fixture Dimensions

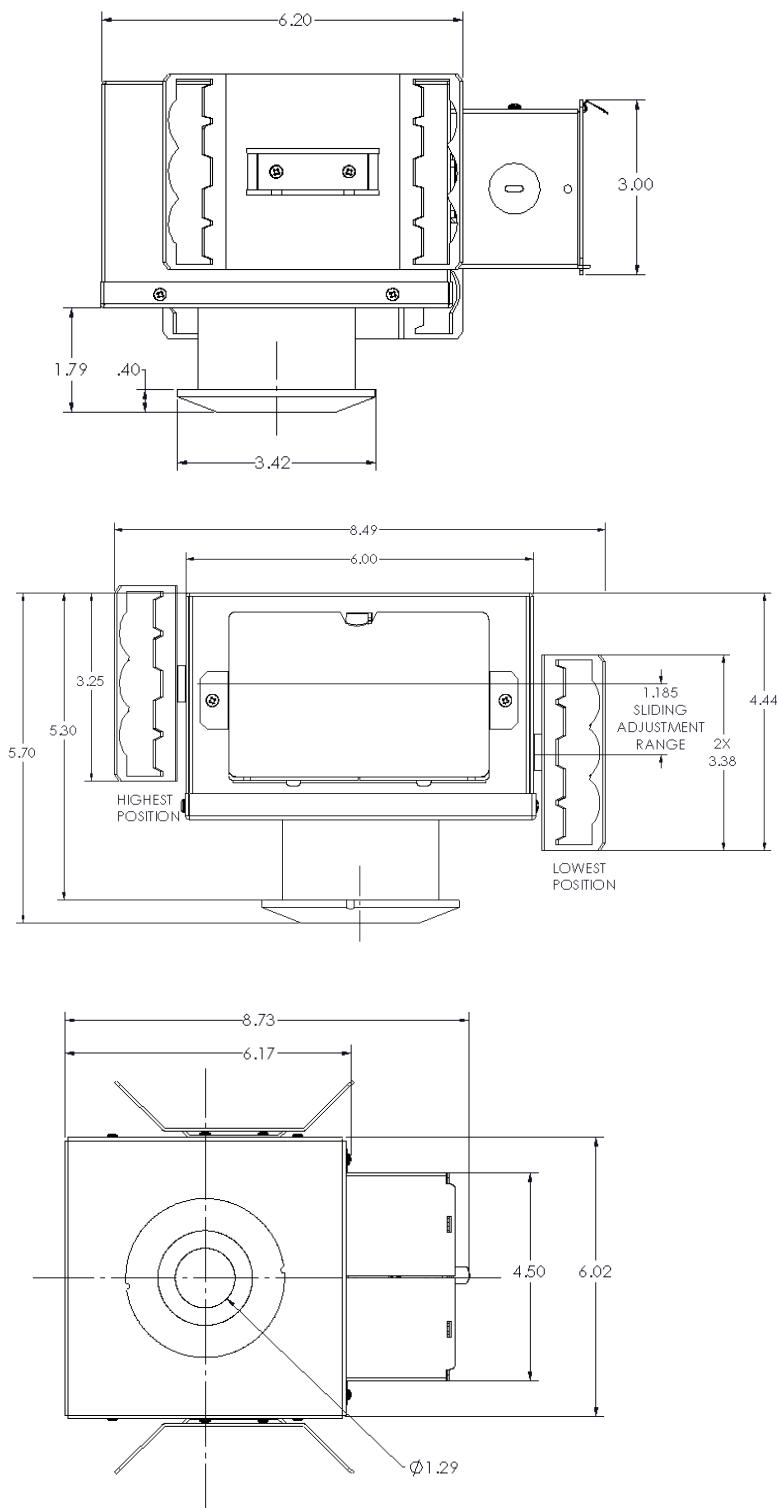

## Concrete Pour Drawing

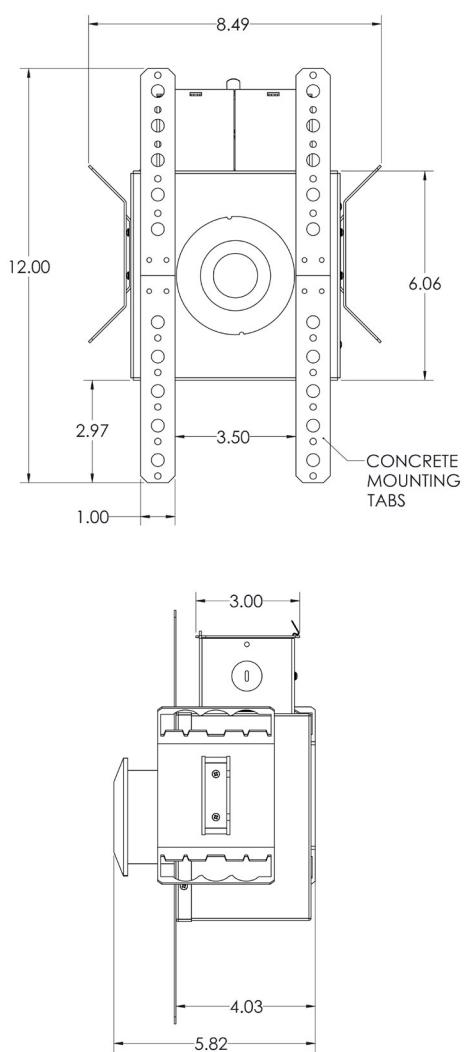

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#"><u>PPLT00632</u></a>	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
<a href="#"><u>PPLT00709</u></a>	ELV / TRIAC & 0-10V Dimming to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2	1-15
<a href="#"><u>PPLT00543</u></a>	0-10V Dimming (to 15%) (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-16
<a href="#"><u>PPLT00284</u></a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-16

*For other power supply options consult factory.*

## PHOTOMETRIC DATA

*Coming Soon*

Job Name/Date:

Fixture Type Designation: