

CUA is a durable, wet label, adjustable, in-grade uplight that is suitable for power washing. It comes in 2 versions - static white or RGBW and tunable white - both with a stainless steel finish. It is driveover and walkover rated for up to 11,000 lbs.



Fixture Dimensions  
 Ø7.0" x 7.0" h  
 See Full Drawing on page 2

## TECHNICAL DATA

<b>Wattage / Input</b>	17W (Static White - 120-277VAC) 18W (RGBW + Tunable White - 120-277VAC)
<b>Power Supply</b>	Integral with Dimming
<b>Construction</b>	Body: Cast 316L Stainless Steel Lens: 0.4" Thick, Tempered Glass
<b>CCT</b>	2700K, 3000K, 3500K, 4000K, RGBW + Tunable White (1650-8000K)
<b>CRI</b>	>80, >90 (RGBW + Tunable White)
<b>Initial Lumens</b>	2140 lm (17W) 1000 lm (18W - RGBW+Tunable White)
<b>Efficacy</b>	127.4 lm/W (17W) 55.6 lm/W (18W - RGBW+Tunable White)
<b>Optics</b>	14°, 25° (Static White); 18°, 24° (RGBW + TW)
<b>Finishes</b>	Stainless Steel
<b>Fixture Dimensions</b>	Ø7.0" x 7.0" h
<b>LED Source</b>	XICATO LED Module, Araya LED Module
<b>IP Rating</b>	IP67, IP69
<b>Driveover Rated</b>	11,000 lbs (30 mph)


## ORDERING INFORMATION

Example: CUA-LEU4SS1LTH. Accessories sold separately.

CUA-L		4	SS1				
Model #	Wattage	Body	Finish	Optic	Driver	Lens	Options
CUA-L	FA - 17W, 2000 lm, 2700K EU - 17W, 2000 lm, 3000K EV - 17W, 2000 lm, 3500K EW - 17W, 2000 lm, 4000K	4 - Fully Recessed With Conduit Entries	SS1 - Stainless Steel Standard Grill	1 - 14° 2 - 25°	L - 120-277VAC Integral w/ 0-10V Dimming	T - Clear Tempered Glass Q - Clear Tempered Glass w/ Anti-Skid Pattern	0 - None H - Honeycomb Louver R - Assymetric Spread A - Anti-Glare Shield
Model #	CCT	Body	Finish	Optic	Driver	Lens	Options
CUA-L	RW - 18W, RGBW + Tunable White (1650K-8000K) + DMX	4 - Fully Recessed With Conduit Entries	SS1 - Stainless Steel Standard Grill	1 - 18° 2 - 24°	C - 120-277VAC <i>All luminaires come with DMX, 0-10V and Bluetooth (Commissioning Capabilities)</i>	T - Clear Tempered Glass Q - Clear Tempered Glass w/ Anti-Skid Pattern	0 - None H - Honeycomb Louver R - Assymetric Spread
Product Code:						Job Name/Date:	

Note: Rubber Lens Holder PP600167 included w/ options

**FIXTURE DIMENSIONS**

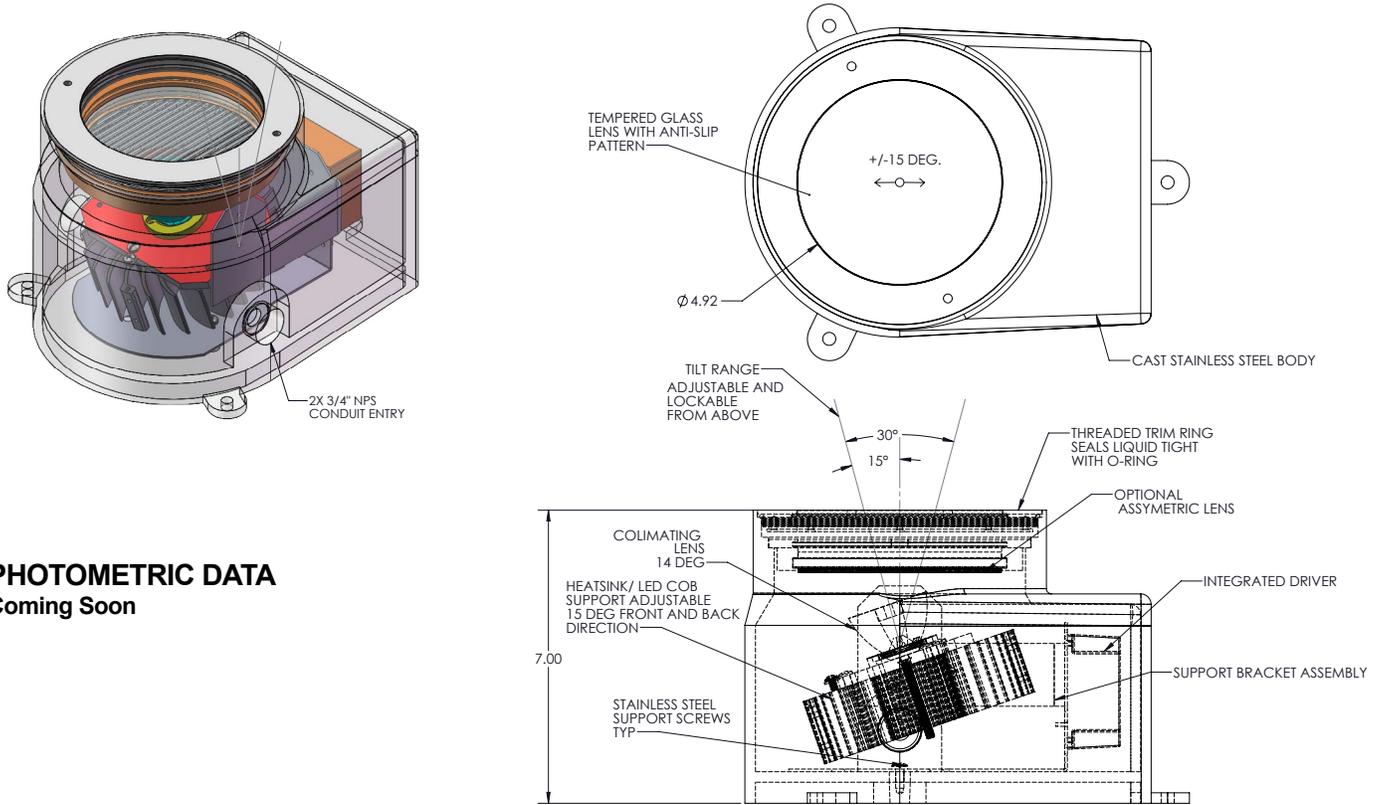

**PHOTOMETRIC DATA**  
Coming Soon

**ACCESSORIES**  
Installation




**ACCESSORIES**  
Controllers (RGBW)



**PPWD00570 - RGBW DMX512+Wifi Controller**  
Touch Sensitive  
Can be controlled by WiFi  
Controls 3 zones synchronously and separately

**ACCESSORIES**  
Anti-Glare

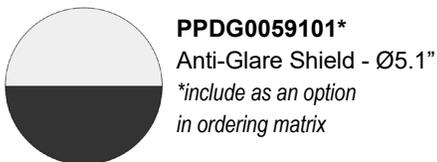

Product Code:

Job Name/Date: