




- Cast 316L Stainless Steel
- 17W, 22W (120-277VAC)
- 33W (Remote 1050mA) or
- 25W (Tunable White+RGBW-DMX, 120-277VAC)
- Integral with Dimming
- Xicato LED Module or Araya LED Module
- LED modules are not adjustable
- No screws to lose
- Lens frame turned from solid stainless steel.
- 0.40" thick tempered glass lens
- Walkover, Driveover rated for 11,000 lbs at 30 mph
- Internal rotatable linear prism lens
- Unit can be through wired for daisy chaining.
- Class I
- Available anti-slip dot pattern glass lens



listed wet label IP67, IP69

CUL

In-Ground LED Fixture
Flat Trim IP67

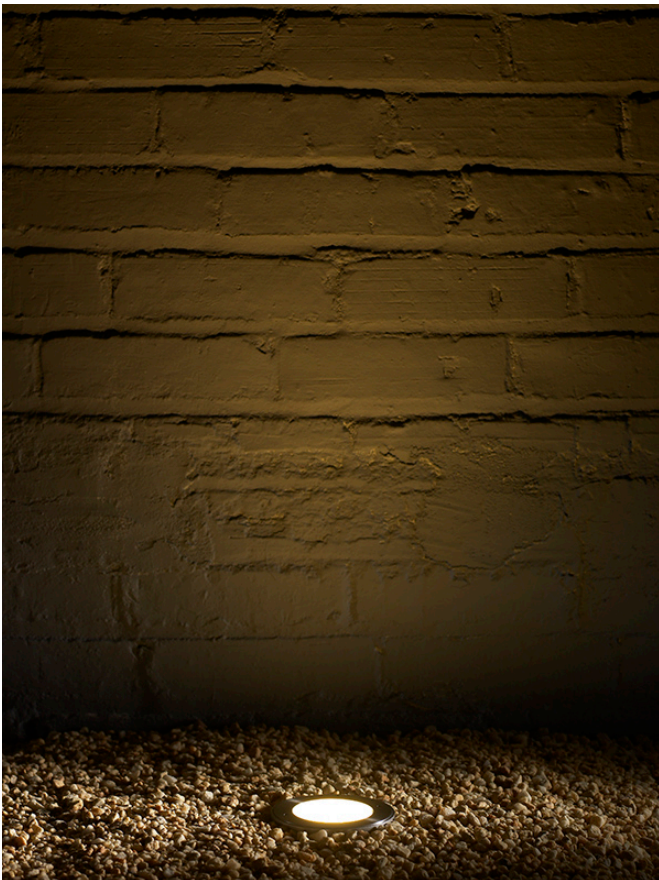

designplan® 

Drawings

CUL - LED

