

CXA is a wet label, adjustable version of the in-grade uplight CDX with an integral driver that is suitable for power washing. It is adjustable +/- 10° (total 20°) and is rotatable 120° front and back. It comes in 4 CCTs or RGBW + tunable white with a stainless steel finish. The static white driver is capable of 3 dimming protocols.



Fixture Dimensions  
 Ø5.75" x 5.25" h  
 See Full Drawing on page 2

## TECHNICAL DATA

<b>Wattage / Input</b>	10W (Static White - 120-277VAC) 12W (RGBW+Tunable White - 120-277VAC)
<b>Power Supply</b>	Integral (0-10V, ELV, Triac Dimming on Static White)
<b>Construction</b>	Body: Cast Stainless Steel 304 Alloy Lens: 0.4" Thick, Clear, Non-Skid or Frosted Tempered Glass Lens Frame: Threaded "Bottle Cap"
<b>CCT</b>	2700K, 3000K, 3500K, 4000K
<b>CRI</b>	>80
<b>Initial Lumens</b>	1334 lm (3000K - Static White) 750 lm (3000K - RGBW+Tunable White)
<b>Efficacy</b>	133.4 lm/W (3000K - Static White) 62.5 lm/W (3000K - RGBW+Tunable White)
<b>Optics</b>	14°, 25° (Static White) 18°, 24° (RGBW+Tunable White)
<b>Finishes</b>	Stainless Steel
<b>Fixture Dimensions</b>	Ø5.75" x 5.25" h
<b>LED Source</b>	Citizen LED COB, Araya LED Module
<b>IP Rating</b>	IP68, IP69
<b>Driveover Rated</b>	11,000 lbs (30mph)

## ORDERING INFORMATION


Example: CXA-LEY4SS12LQW.

CXA-L	-	4	SS1				
Model #	CCT	Body	Finish	Optic	Driver	Lens	Options
CXA-L	EW - 2700K EX - 3000K EY - 3500K EZ - 4000K	4 - Fully Recessed	SS1 - Stainless Steel Standard Grill	1 - 14° 2 - 25°	L - 120-277VAC Integral w/ 0-10V Dimming <i>Note: ELV and Triac 120V only</i>	T - Clear Tempered Glass Q - Non-slip Tempered G - Frosted Tempered	0 - None W - Linear Spread H - Honeycomb Louver S - Solite Lens B - Special Lens
Model #	CCT			Optic	Driver		
CXA-L	RW - 12W, RGBW + Tunable White (1650K-8000K) +DMX			1 - 18° 2 - 24°	C - 120-277VAC		<b>Note: Rubber Lens Holder PP600167 included w/ options</b>




Job Name/Date:

Fixture Type Designation:

**FIXTURE DIMENSIONS**

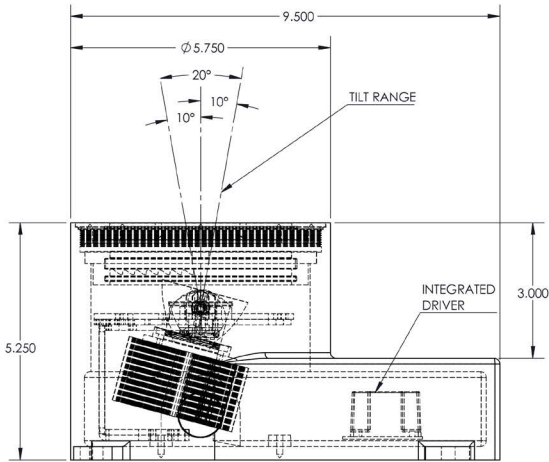

**CXA**

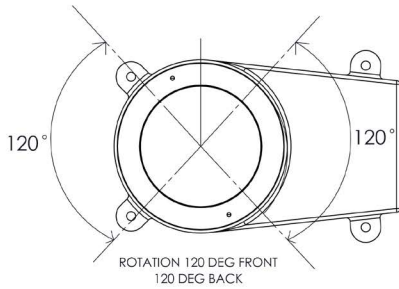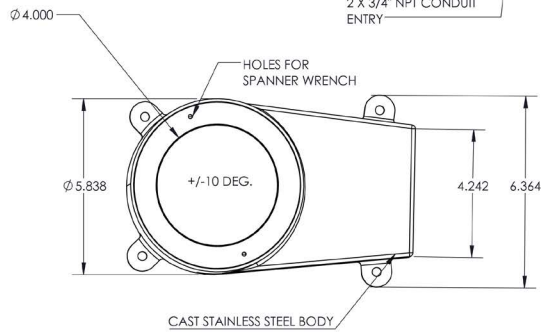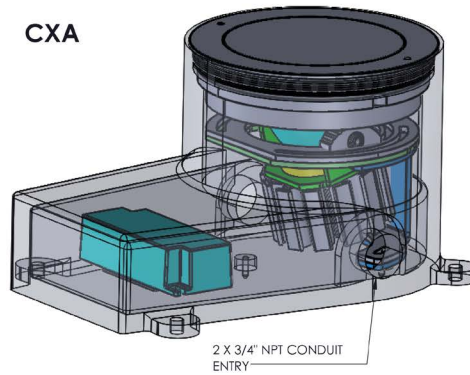


**PHOTOMETRIC DATA**

Coming Soon

**ACCESSORIES - Installation**



**LL301** - Optional Leveling Pad  
Set of 4

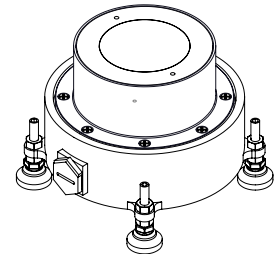

Job Name/Date:

Fixture Type Designation: