


The Cameo 1.1 is a small adjustable recessed downlight for indoor applications. With $\pm 20^\circ$ tiltable optics and 360° rotation, the fixture is ideal for tight plenums, false ceilings and niches in plasterboard.



Cutout Dimensions for ceiling installations = $\varnothing 2.13"$

Fixture Dimensions

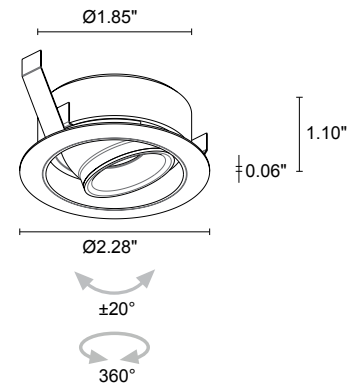

TECHNICAL DATA

Wattage / Input	1.5W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body/Trim: Aluminum Alloy EN AW 6026 Cable Length: 4.92'
CCT	2700K, 3000K, 4000K
CRI	>90
Delivered Lumens	144 lm (3000K, 29°)
Efficacy	96 lm/W (3000K, 29°)
Optics	5 Standard, tiltable $\pm 20^\circ$ (see below)
Finishes	White, Black, Custom RAL (4 Stage Marine Grade Finish)
Fixture Dimensions	$\varnothing 2.28" \times 1.10" \text{ h}$
Cut-out Size	$\varnothing 2.13"$ (for ceiling installations)
Fixture Weight	0.15 lbs
LED Source	1 Power LED
Lumen Maintenance	L90, B10 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	32°F to +113°F
IP Rating	IP40
IK Rating	-

ORDERING INFORMATION

Example: CM1120100050ME. Power Supplies / Accessories ordered separately.

CM11201000			
Model No.	CCT	Optics	Finish
CM11201000	F0 - 2700K 50 - 3000K 90 - 4000K	S - 17° tiltable $\pm 20^\circ$ M - 29° tiltable $\pm 20^\circ$ P - 48° sharp tiltable $\pm 20^\circ$ L - 52° tiltable $\pm 20^\circ$ W - 16°x34° tiltable $\pm 20^\circ$	E - White N - Black C - Custom RAL (Consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA




Part Number	Description	Input/Output	# of Fixtures
PPLT00497	Phase Dim (120V only)	120VAC to 500mA, 12W, Class 2	3-6
PPLT00467-P	0-10V Dimming to 1%	120-277VAC to 500mA, 50W, Class 2	1-15
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	2-15

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ / 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	4-5
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ / 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	7-10
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ / 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	14-14

For other power supply options consult factory.

ACCESSORIES - Installation



AH-00008-IC (IC Rated)

AH-00008-CP (Chicago Plenum Rated)

Housing for recessed installation in ceilings.


Job Name/Date:

Fixture Type Designation:


PHOTOMETRIC DATA

Note all Photometry is 3000K


S - 17°

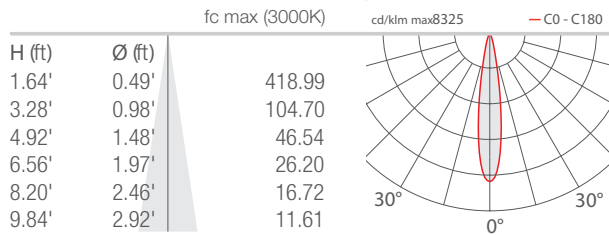


M - 29°

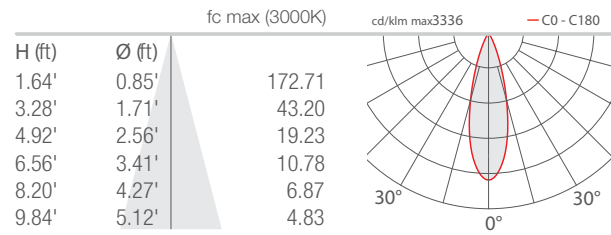


P - 48° Sharp

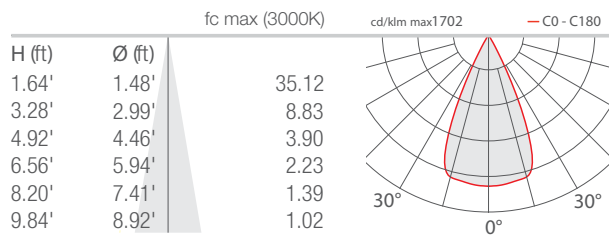

L - 52°

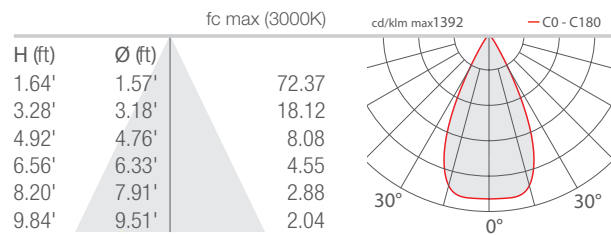

W - 16°x34°

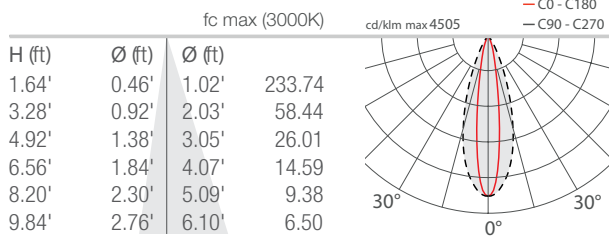

Job Name/Date:

Fixture Type Designation: