


CASE MAXI 20 PRO


Case is a family of square outdoor floodlights for installation on a façade or wall. There are three sizes, Micro, Medium and Maxi that come in 2 color temperatures, 3 optic options and 3 standard finishes.

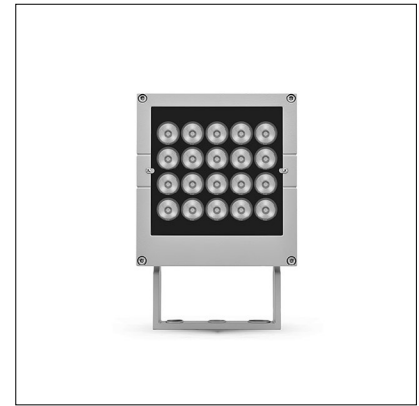

TECHNICAL DATA

Wattage / Input	50W (120-277VAC)
Power Supply	Integral (0-10V Dimming)
Construction	Body/Bracket: High Corrosion Resistance, Die-cast, Copper-free Aluminum Lens: Tempered Safely Glass Cable Length: 3.28'
CCT	3000K
BUG Rating	B0-U5-G5
Delivered Lumens	4900 lm (3000K, 10°)
Efficacy	98 lm/W
Optics	10°, 30°, 45°
Finishes	Textured Gray, Anthracite Gray, Matte Black
Fixture Dimensions	9.61" l x 5.04" w x 14.88" h
Fixture Weight	11.46 lbs
LED Source	20 CREE XP-L LEDs
IP Rating	IP65
Impact Rating	IK08

Fixture Dimensions

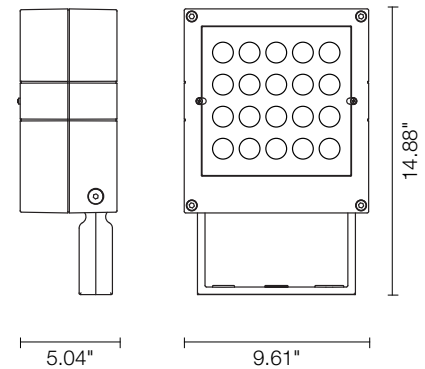

BOTH included in standard package

Short Fixing Bracket



Medium Fixing Bracket



With Extended Fixing Bracket

ORDERING INFORMATION

Example: 101016P-30K-30-TG.

	-	30K	-		-	
Model No.		CCT		Optics		Finish
101016P - short and medium fixing bracket included		30K - 3000K		10 - 10°		TG - Textured Gray
101016P - with extended fixing bracket - MARK				30 - 30°		AG - Anthracite Gray
				45 - 45°		MB - Matte Black


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: Photometry is 3000K

Maximum Candela = 104543

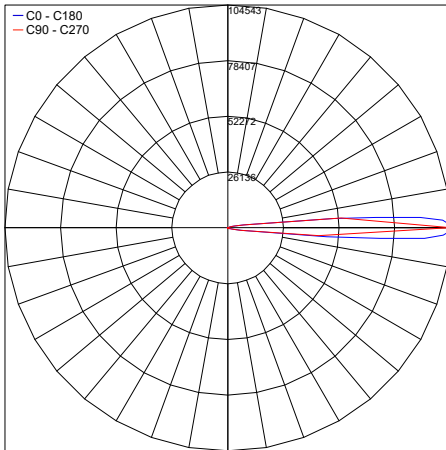


PHOTOMETRIC FILENAME : 101016_10.IES

Maximum Candela = 16025

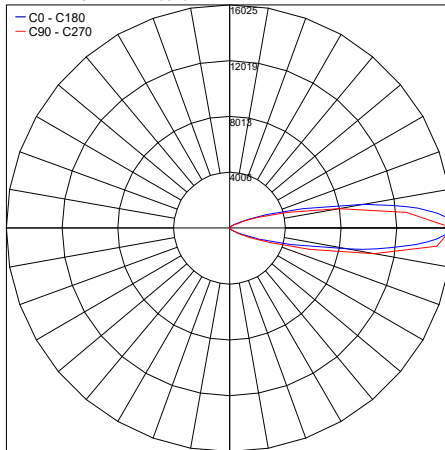

PHOTOMETRIC FILENAME : 101016_30.IES

Maximum Candela = 10753

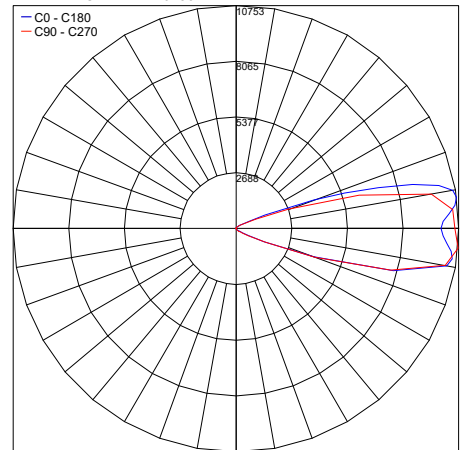

PHOTOMETRIC FILENAME : 101016_45.IES

Job Name/Date:

Fixture Type Designation: