


CASE MAXI 20


Case is a family of square outdoor floodlights for installation on a façade or wall. There are three sizes, Micro, Medium and Maxi that come in 2 color temperatures, 3 optic options and 3 standard finishes.

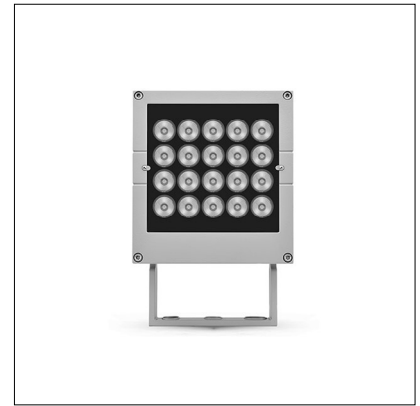

TECHNICAL DATA

Wattage / Input	30W (120-277VAC)
Power Supply	Integral (0-10V Dimming)
Construction	Body/Bracket: High Corrosion Resistance, Die-cast, Copper-free Aluminum Lens: Tempered Safely Glass Cable Length: 3.28'
CCT	3000K, 4000K
BUG Rating	B0-U5-G4 (10°) B0-U4-G4 (30°)
Delivered Lumens	2880 lm (3000K, 10°)
Efficacy	96 lm/W
Optics	10°, 30°, 45°
Finishes	Textured Gray, Anthracite Gray, Matte Black
Fixture Dimensions	9.61" l x 5.04" w x 14.88" h
Fixture Weight	11.46 lbs
LED Source	20 CREE XP-G2 LEDs
IP Rating	IP65
Impact Rating	IK08

Fixture Dimensions

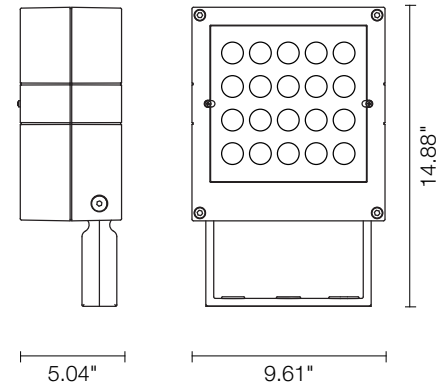

BOTH included in standard package

Short Fixing Bracket



Medium Fixing Bracket



With Extended Fixing Bracket

ORDERING INFORMATION

Example: 101014P-30K-30-TG.


Model No.	CCT	Optics	Finish	
101014P - short and medium fixing bracket included	30K - 3000K	10 - 10°	TG - Textured Gray	
101014P - with extended fixing bracket - MARK	40K - 4000K	30 - 30°	AG - Anthracite Gray	
		45 - 45°	MB - Matte Black	

Job Name/Date:


Fixture Type Designation:

PHOTOMETRIC DATA


Note: Photometry is 3000K

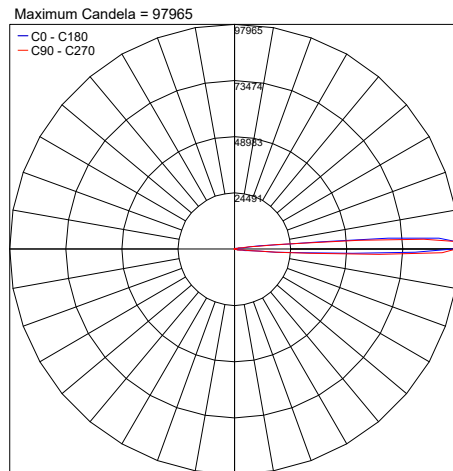

PHOTOMETRIC FILENAME : CASE MAXI20 3000K 30W 10DEG.IES

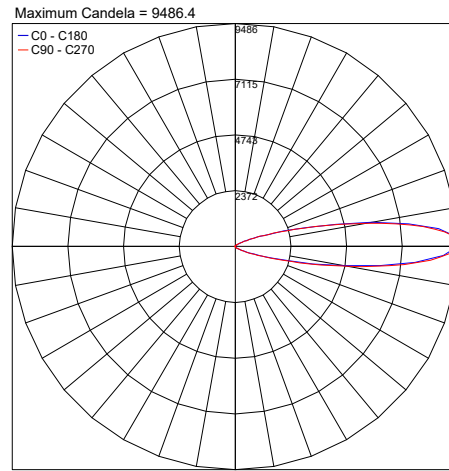

PHOTOMETRIC FILENAME : CASE MAXI20 3000K 30W 30DEG.IES

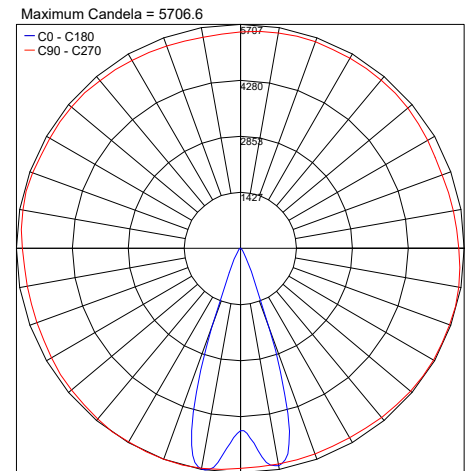

PHOTOMETRIC FILENAME : CASE MAXI20 3000K 30W 45DEG.IES

Job Name/Date:

Fixture Type Designation: