


# CASE MAXI 20


Case is a family of square outdoor floodlights for installation on a façade or wall. There are three sizes, Micro, Medium and Maxi that come in 2 color temperatures, 3 optic options and 3 standard finishes.

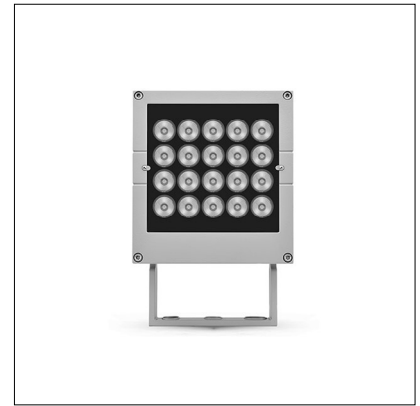

## TECHNICAL DATA

<b>Wattage / Input</b>	30W (120-277VAC)
<b>Power Supply</b>	Integral (0-10V Dimming)
<b>Construction</b>	Body/Bracket: High Corrosion Resistance, Die-cast, Copper-free Aluminum Lens: Tempered Safely Glass Cable Length: 3.28'
<b>CCT</b>	3000K, 4000K
<b>BUG Rating</b>	B0-U5-G4 (10°) B0-U4-G4 (30°)
<b>Delivered Lumens</b>	2880 lm (3000K, 10°)
<b>Efficacy</b>	96 lm/W
<b>Optics</b>	10°, 30°, 45°
<b>Finishes</b>	Textured Gray, Anthracite Gray, Matte Black
<b>Fixture Dimensions</b>	9.61" l x 5.04" w x 14.88" h
<b>Fixture Weight</b>	11.46 lbs
<b>LED Source</b>	20 CREE XP-G2 LEDs
<b>IP Rating</b>	IP65
<b>Impact Rating</b>	IK08

### Fixture Dimensions

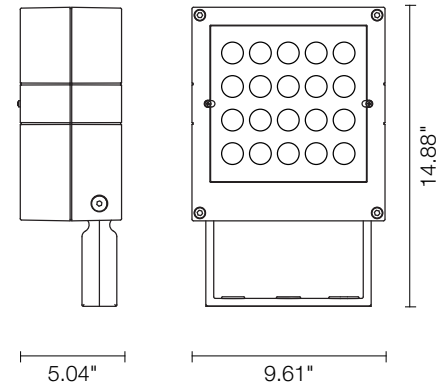

### ***BOTH included in standard package***

Short Fixing Bracket



Medium Fixing Bracket



With Extended Fixing Bracket

## ORDERING INFORMATION

Example: 101014P-30K-30-TG.


<b>Model No.</b>	<b>CCT</b>	<b>Optics</b>	<b>Finish</b>		
101014P - short and medium fixing bracket <b>included</b>	30K - 3000K	10 - 10°	TG - Textured Gray		
101014P - with extended fixing bracket - <b>MARK</b>	40K - 4000K	30 - 30°	AG - Anthracite Gray		
		45 - 45°	MB - Matte Black		

Job Name/Date:


Fixture Type Designation:

## PHOTOMETRIC DATA


Note: Photometry is 3000K

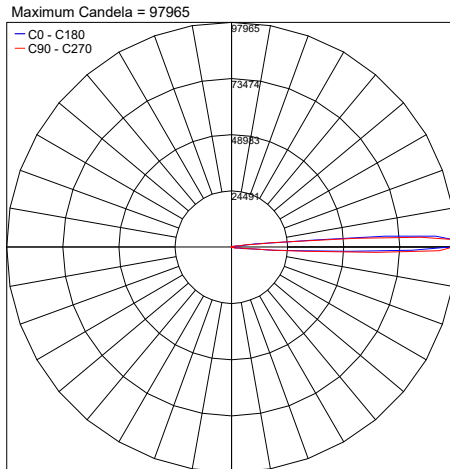

PHOTOMETRIC FILENAME : CASE MAXI20 3000K 30W 10DEG.IES

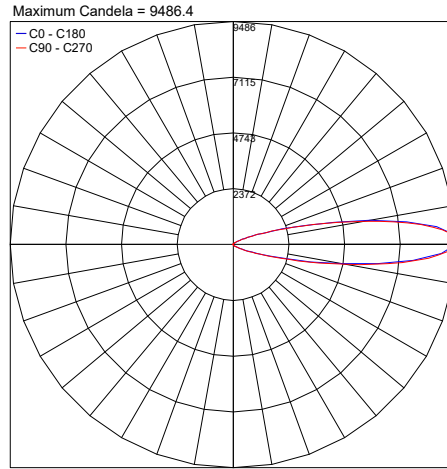

PHOTOMETRIC FILENAME : CASE MAXI20 3000K 30W 30DEG.IES

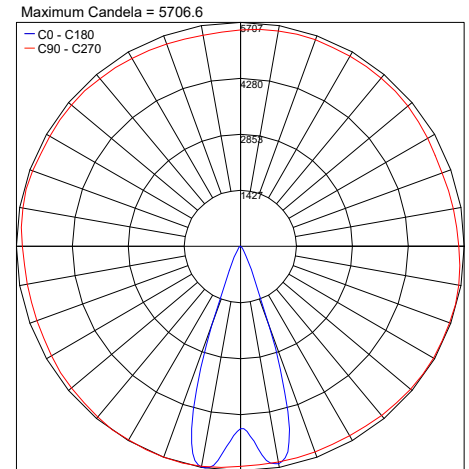

PHOTOMETRIC FILENAME : CASE MAXI20 3000K 30W 45DEG.IES

Job Name/Date:

Fixture Type Designation: