



Case is a family of square outdoor floodlights for installation on a façade or wall. There are three sizes, Micro, Medium and Maxi that come in 2 color temperatures, 3 optic options and 3 standard finishes.

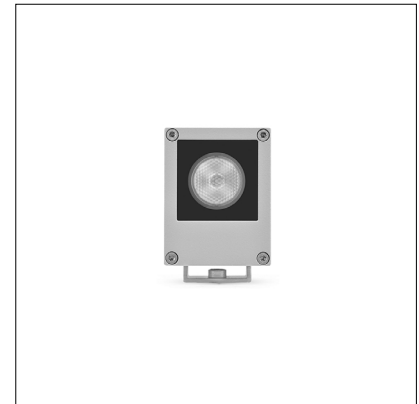


TECHNICAL DATA

Wattage / Input	1W (120-277VAC)
Power Supply	Integral
Construction	Body/Bracket: High Corrosion Resistance, Die-cast, Copper-free Aluminum Lens: Tempered Safely Glass Cable Length: 3.28'
CCT	3000K, 4000K
Delivered Lumens	115 lm (3000K, 10°)
Efficacy	115 lm/W
Optics	10°, 30°, 45°
Finishes	Textured Gray, Anthracite Gray, Matte Black
Fixture Dimensions	2.52" l x 2.20" w x 3.74" h
Fixture Weight	1.10 lbs
LED Source	1 CREE XP-G2 LED
IP Rating	IP65
Impact Rating	IK08

Fixture Dimensions

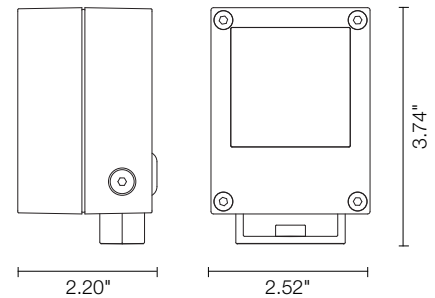

with Extended Fixing Bracket Option

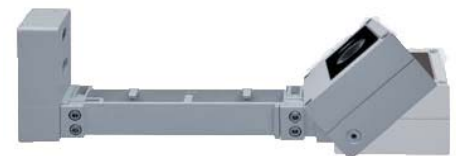

ORDERING INFORMATION

Example: 101001P-30K-30-TG.

Model No.	CCT	Optics	Finish
101001P	30K - 3000K	10 - 10°	TG - Textured Gray
101002P (includes extended fixing bracket)	40K - 4000K	30 - 30°	AG - Anthracite Gray
		45 - 45°	MB - Matt Black

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation




AC001
Hearth Spike

PHOTOMETRIC DATA


Note: Photometry is 3000K

Maximum Candela = 3915.8

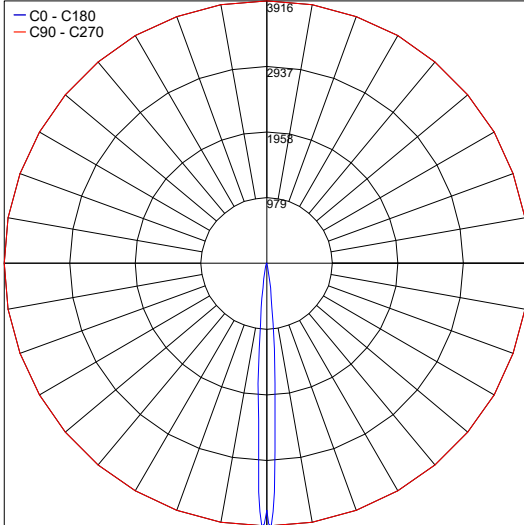

PHOTOMETRIC FILENAME : CASE MICRO 3000K 10DEG 1W.IES

Maximum Candela = 565.6

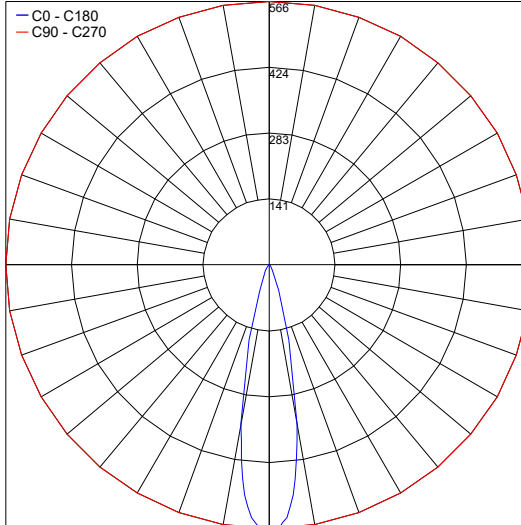

PHOTOMETRIC FILENAME : CASE MICRO 3000K 30DEG 1W.IES

Job Name/Date:

Fixture Type Designation: