



Case is a family of square outdoor floodlights for installation on a façade or wall. There are three sizes, Micro, Medium and Maxi that come in 2 color temperatures, 3 optic options and 3 standard finishes.

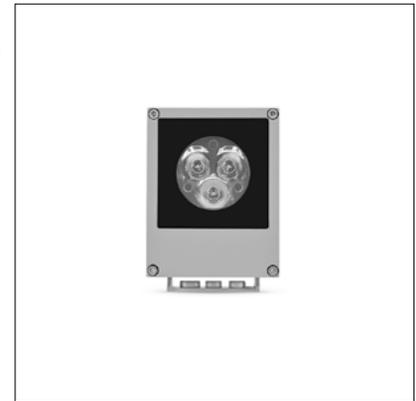

TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage / Input | 3W (120-277VAC) |
| Power Supply | Integral |
| Construction | Body/Bracket: High Corrosion Resistance, Die-cast, Copper-free Aluminum Lens: Tempered Safety Glass Cable Length: 3.28' |
| CCT | 3000K, 4000K |
| BUG Rating | B0-U3-G0 |
| Delivered Lumens | 346 lm (3000K, 10°) |
| Efficacy | 115.3 lm/W |
| Optics | 10°, 30°, 45° |
| Finishes | Textured Gray, Anthracite Gray, Matte Black |
| Fixture Dimensions | 3.39" l x 3.07" w x 4.72" h |
| Fixture Weight | 1.76 lbs |
| LED Source | 3 CREE XP-G2 LEDs |
| IP Rating | IP65 |
| Impact Rating | IK08 |

Fixture Dimensions

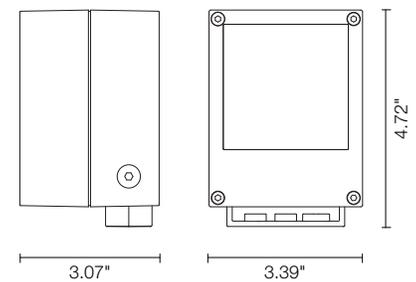

with Extended Fixing Bracket Option



ORDERING INFORMATION

Example: 101003P-30K-30-TG.

| | | | |
|--|-------------|---------------|----------------------|
| | | | |
| Model No. | CCT | Optics | Finish |
| 101003P | 30K - 3000K | 10 - 10° | TG - Textured Gray |
| 101004P (includes extended fixing bracket) | 40K - 4000K | 30 - 30° | AG - Anthracite Gray |
| | | 45 - 45° | MB - Matte Black |

Job Name/Date:

Fixture Type Designation:

ACCESSORIES Installation




AC001
Hearth Spike

PHOTOMETRIC DATA

Note: Photometry is 3000K

Maximum Candela = 7329.5

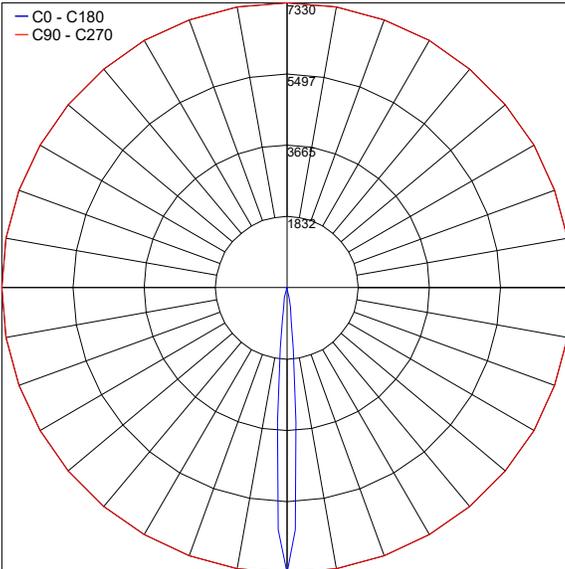

PHOTOMETRIC FILENAME : CASE MINI 3000K 3W 10DEG.IES

Job Name/Date:

Fixture Type Designation: