


Technical features


IP65 IK08

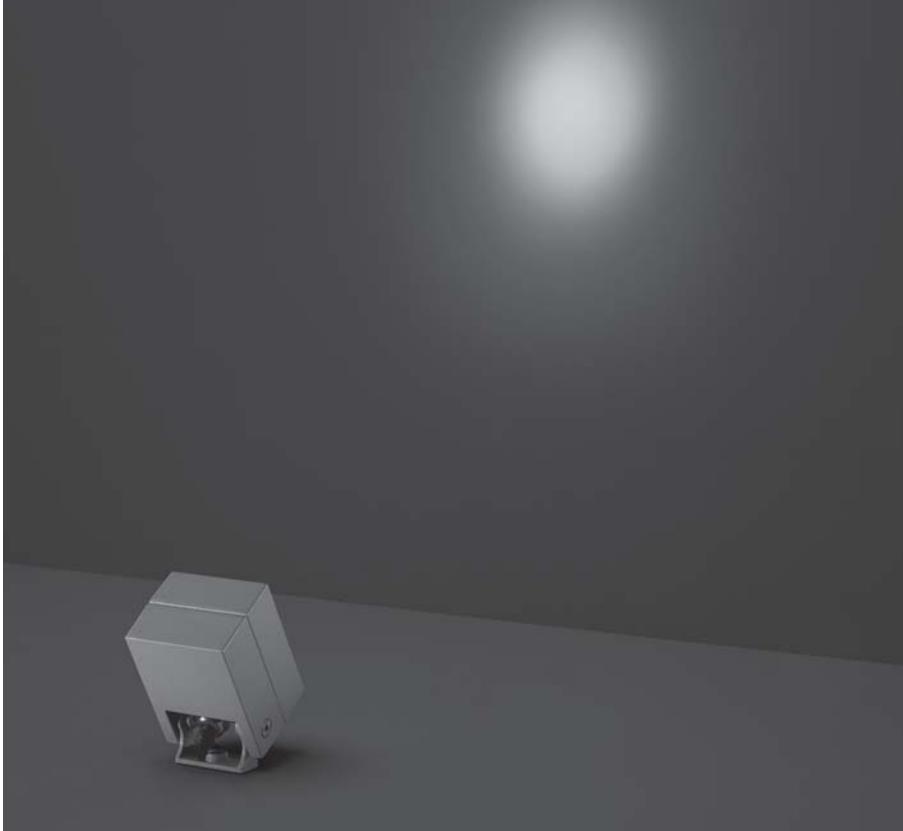

101001P

CASE MICRO

Square small floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 1 CREE XP-G2 LED. IP65 rating.



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	115	115.00
high-power led	30°	110	110.00
high-power led	45°	104	104.00
4000°K neutral-white			
high-power led	10°	120	120.00
high-power led	30°	114	114.00
high-power led	45°	109	109.00

Finish color options:

 Textured Grey RAL 9006

 Anthracite Grey RAL 7016

 Matte Black (on request)

Technical data


Wattage	1W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 1 x 1W CREE "XP-G2" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Nickel-plated brass cable gland PG9
Power cable	3.28' neoprene power cable included
Gross weight	1.10 lbs

101002P - with EXTENDED FIXING BRACKET OPTION



AC001
HEARTH SPIKE




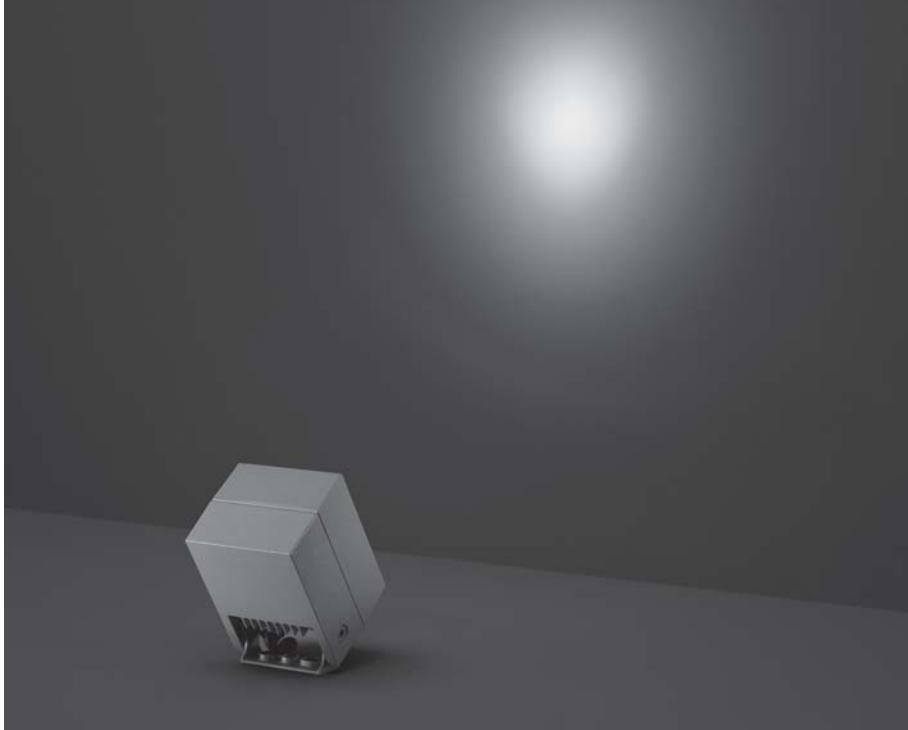

101003P

CASE MINI

Square small floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 3 CREE XP-G3 LED. IP65 rating.



light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	346	115.33
high-power led	30°	329	109.66
high-power led	45°	312	104.00
4000°K neutral-white			
high-power led	10°	360	120.00
high-power led	30°	342	114.00
high-power led	45°	325	108.33

Finish color options:

 Textured Grey RAL 9006

 Anthracite Grey RAL 7016

 Matte Black (on request)


Technical features

 IP65  IK08

Technical data

Wattage	3W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 3 x 1W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Nickel-plated brass cable gland PG9
Power cable	3.28' neoprene power cable included
Gross weight	1.76 lbs


101004P - with EXTENDED FIXING BRACKET OPTION

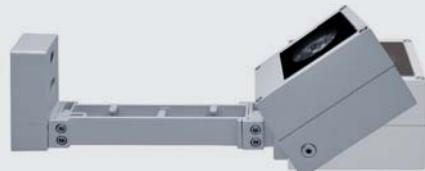

AC001
HEARTH SPIKE





Technical features

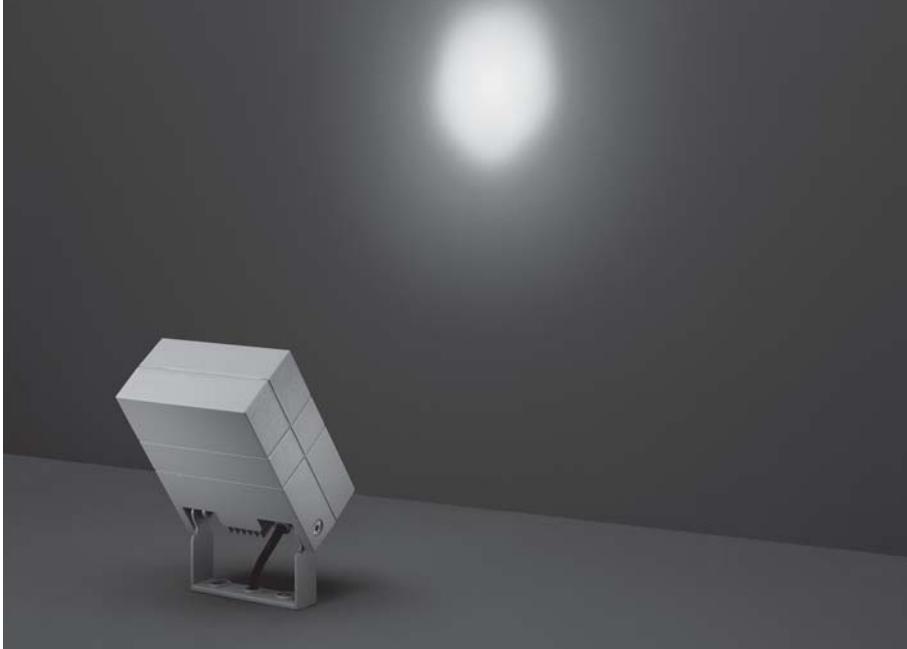

101006P

CASE MEDIUM

Square floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 5 CREE XP-G3 LED. IP65 rating.



Technical data

Wattage	8W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 5 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	4.41 lbs

SHORT FIXING BRACKET



MEDIUM FIXING BRACKET



BOTH included in the standard package

101007P - EXTENDED FIXING BRACKET OPTION



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	720	90.00
high-power led	30°	684	85.50
high-power led	45°	650	81.25
4000°K neutral-white			
high-power led	10°	750	93.75
high-power led	30°	713	89.13
high-power led	45°	677	84.63

Finish color options:

Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matte Black (on request)


Technical features



101008P

CASE MAXI

Square floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 8 CREE XP-G3 LED. IP65 rating.



light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	1,152	96.00
high-power led	30°	1,095	91.25
high-power led	45°	1,040	86.67
4000°K neutral-white			
high-power led	10°	1,200	100.00
high-power led	30°	1,140	95.00
high-power led	45°	1,083	90.25

Finish color options:

Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matte Black (on request)

Technical data

Wattage	12W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 8 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	11.46 lbs

SHORT FIXING BRACKET



MEDIUM FIXING BRACKET



BOTH included in the standard package

101009P - EXTENDED FIXING BRACKET OPTION





Technical features



101014P

CASE MAXI-20

Square floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 20 CREE XP-G3 LED. IP65 rating.

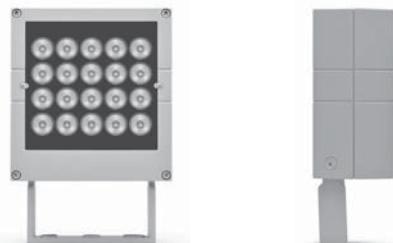

light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	2,880	96.00
high-power led	30°	2,736	91.20
high-power led	45°	2,600	86.67
4000°K neutral-white			
high-power led	10°	3,000	100.00
high-power led	30°	2,850	95.00
high-power led	45°	2,708	90.26

Finish color options:

Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matte Black (on request)

Technical data

Wattage	30W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 20 x 1.5W CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	11.46 lbs

SHORT FIXING BRACKET



MEDIUM FIXING BRACKET



BOTH included in the standard package

101014P - EXTENDED FIXING BRACKET OPTION






Technical features



101016P

CASE MAXI-20 PRO

Square floodlight for outdoor installation on a façade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, moulded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 20 CREE XP-L LED. IP65 rating.



light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	4,900	98.00
high-power led	30°	4,650	93.00
high-power led	45°	4,420	88.40

* Other light colors available on request: Neutral-White

Finish color options:

Textured Grey RAL 9006

Anthracite Grey RAL 7016

Matt Black (on request)

Technical data

Wattage	50W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 20 CREE "XP-L" LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50/60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	11.46 lbs

SHORT FIXING BRACKET



MEDIUM FIXING BRACKET



BOTH included in the standard package

101016P - EXTENDED FIXING BRACKET OPTION



