

CEDRUS QUANTUM TORSION


Cedrus Quantum Torsion is recessed round downlight with a conical interior with excellent color rendering (CRI 90). The integral LED module is recessed in the centre of the downlight, providing visual comfort. It is available in 2 color temperatures and 2 standard finishes.



TECHNICAL DATA

Wattage / Input	6.2W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Extruded Aluminum
CCT	2700K, 3000K
CRI	90
Delivered Lumens	622 lm (3000K)
Efficacy	100.3 lm/W
Optics	36°
Finishes	Textured Black, Textured White
LED Source	BRIDGELUX LED
Fixture Dimensions	Ø3.23" x 3.15"
Cut Out Dimensions	Ø2.99"
Fixture Weight	0.44 lbs
IP Rating	IP20 - (IP54 available on request)

Fixture Dimensions



2.99"

Installation depth 3.35"

ORDERING INFORMATION

Example: T348728. Power Supplies ordered separately.

Model No.	Description
T348748	2700K, Textured White
T348727	2700K, Textured Black
T348749	3000K, Textured White
T348728	3000K, Textured Black

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00496	Phase Dim (120V only)	120VAC to 350mA, 12W, Class 2, DAMP	1-1
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2, DAMP	1-2
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2, DAMP	1-2

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00562	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ OR 1% 3-Wire LED Driver	120-277VAC to 350mA, 17.5W, Class 2	2-2

For other power supply options consult factory.

ACCESSORIES


T348100

Frame for plaster

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 1081.6

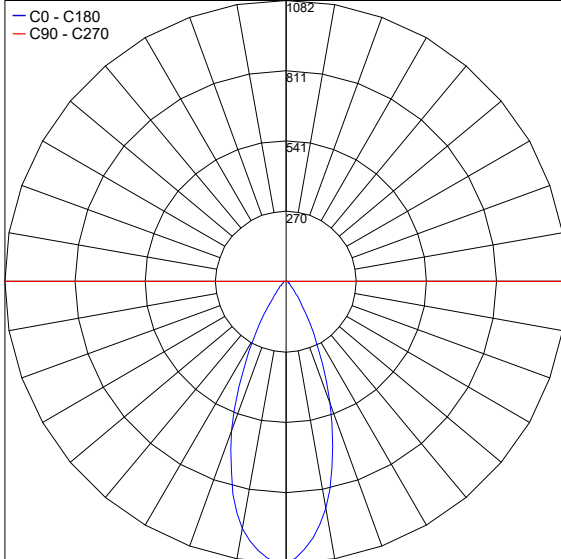

PHOTOMETRIC FILENAME : CEDRUS QUANTUM TORSION CRI90 3000K.IES

Job Name/Date:

Fixture Type Designation: