


Class is a totally disappearing indoor recessed luminaire made of AirCoral® suitable for installation on walls or ceilings. It is available in 3000K standard with a 40° optic and can be set up with a 45° or 90° light beam inclination.



TECHNICAL DATA

Wattage / Input	9W (500mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: AirCoral® Case: Galvanized Steel Lens: Frosted Glass
CCT	3000K 2700K, 4000K on request
CRI	>90
Delivered Lumens	557 lm (3000K)
Efficacy	61.9 lm/W
Optics	40°
Finishes	AirCoral® - suitable for painting
LED Source	Professional COB LED
Fixture Dimensions	7.48" w x 9.65" l x 2.76" h
Cut-out Dimension	7.68" x 7.28"
Aperature	Ø4.72"
Fixture Weight	3.31 lbs
IP Rating	IP40

Fixture Dimensions

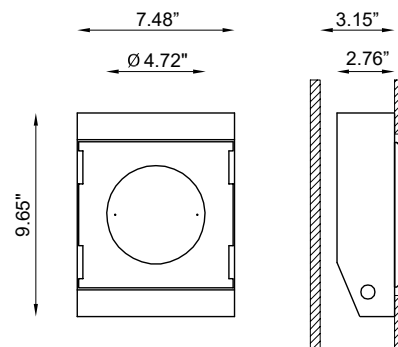

The body is made of AirCoral® a unique patented composite material that actually purifies the air. It can be calculated how many cubic feet each fixture will purify. See website for Aircoral® calculator.

Additionally, Aircoral® is:

- Antibacterial.
- Antifungal.
- Scratch-resistant.
- Dust-resistant.
- Suitable for painting.
- LEED recognized material.

ORDERING INFORMATION

Example: BU6193.Z.AC.27.US. Power Supplies ordered separately.

BU6193.Z	AC		US
Model No.	Finish	CCT	
BU6193.Z	AC - AirCoral®	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	US

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA


Part Number	Description	Input/Output	# of Fixtures
PPLT00469	Phase Dim (120V only)	120VAC to 500mA, 14W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 500mA, 50W, Class 2	1-3
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 500mA, 100W, Class 2	1-3

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00259	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 10W, Class 2	1-1
PPLT00195	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 19W, Class 2	1-2
PPLT00180	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 500mA, 27W, Class 2	2-2

*For other power supply options consult factory.***PHOTOMETRIC DATA***Note all Photometry is 3000K*

Maximum Candela = 685

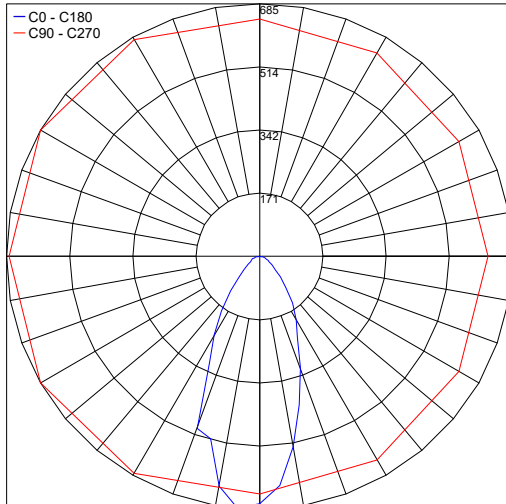*Job Name/Date:**Fixture Type Designation:*