

# CUBE W 1.1



Cube W 1.1 is a wet label ceiling mounted downlight rated for outdoor use. Available in white or blue light as well as RGB with 3 optical options in 3 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	6W (500mA), 3W (350mA, RGB)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Anti-Corrosive aluminum Lens: Frosted plexiglass
<b>CCT</b>	2700K, 3000K, 4000K, 5000K, Blue; RGB
<b>CRI</b>	>80
<b>BUG Rating</b>	B1-U1-G0 (3000K)
<b>Delivered Lumens</b>	295 lm (3000K, 28°) 126 lm: (R) 46 lm, (G) 60 lm, (B) 20 lm
<b>Efficacy</b>	49 lm/W (3000K, 28°) 42 lm/W (RGB)
<b>Optics</b>	3 Standard (see below)
<b>Finishes</b>	3 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	2.17" l x 2.17" w x 2.17" h
<b>Aperture</b>	Ø2.0"
<b>Fixture Weight</b>	0.77 lbs
<b>LED Source</b>	3 Power LEDs
<b>Lumen Maintenance</b>	L90,B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP54
<b>IK Rating</b>	N/A

Fixture Dimensions

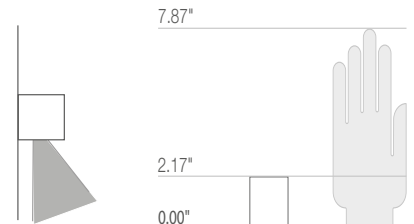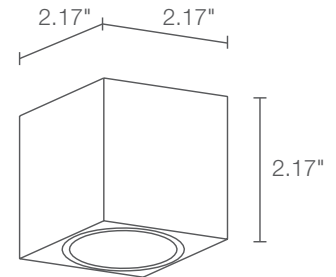

## ORDERING INFORMATION

Example: CU1132FSE. Power Supplies ordered separately.

Model No.	CCT	Optics	Finish
<b>CU1132</b> - 6W (500mA) <i>Static White/Blue Only</i>	<b>F</b> - 2700K <b>0</b> - 5000K <b>5</b> - 3000K <b>1</b> - Blue <b>9</b> - 4000K	<b>S</b> - 18° tilted 20° <b>M</b> - 28° tilted 20° <b>L</b> - 36° tilted 20°	<b>E</b> - White <b>H</b> - Anthracite <b>T</b> - Cor-ten <b>C</b> - Custom RAL <i>(consult factory for "C")</i>
Model No.	CCT		
<b>CU1331</b> - 3W (350mA) <i>RGB Only</i>	<b>6</b> - RGB		

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

500mA

Part Number	Description	Input/Output	Fixtures 6W
<a href="#">PPLT00466-P</a>	0-10V Dimming to 1%	120-277VAC to 500mA, 10W, Class 2	1-1
<a href="#">PPLT00497</a>	Phase Dim (120V Only)	120VAC to 500mA, 12W, Class 2	1-2
<a href="#">PPLT00465-P</a>	0-10V Dimming to 1.0%	120-277VAC to 500mA 20W, Class 2	1-3
<a href="#">PPLT00527</a>	Phase Dim (120V Only)	120VAC to 500mA, 25W, Class 2	3-4
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 500mA, 30W, Class 2	1-5

## Suggested Lutron Compatible Drivers

500mA

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	Fixtures 6W
<a href="#">PPLT00259</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 10W	1-1
<a href="#">PPLT00195</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC, 19W	2-3
<a href="#">PPLT00180</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC , 27W	3-4

350mA - RGB

Part Number	Description	Input/Output	Fixtures 3W
<a href="#">PPLT00129-P</a>	DMX/RDM (Field Addressable)	120-277VAC to 500mA, 100W, Class 2	1-14


For other power supply options consult factory.

Job Name/Date:


Fixture Type Designation:

**PHOTOMETRIC DATA**  
 Note all Photometry is 3000K


**S - 18° tilted 20°**

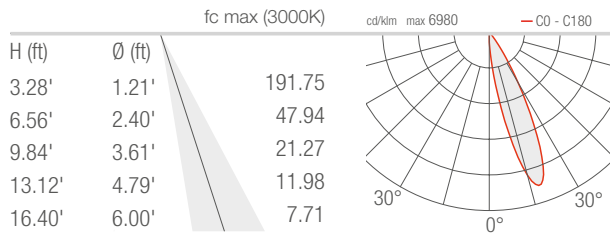

**M - 28° tilted 20°**

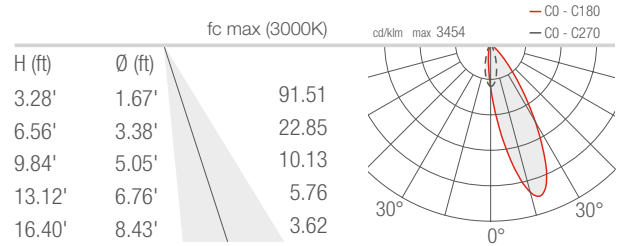

**L - 36° tilted 20°**

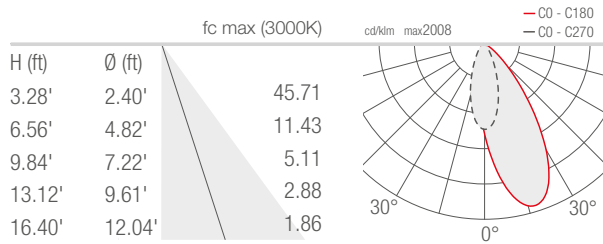

Job Name/Date:

Fixture Type Designation: