

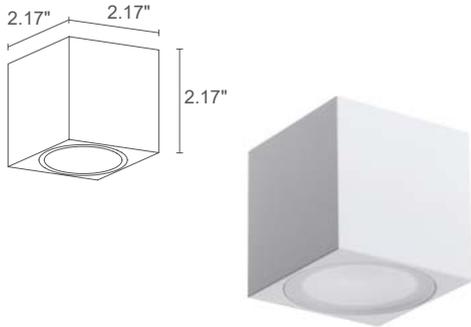


CUBE C

OUTDOOR CEILING MOUNTED OPTICS WITH WHITE AND RGB LIGHT



CUBE C 1.2

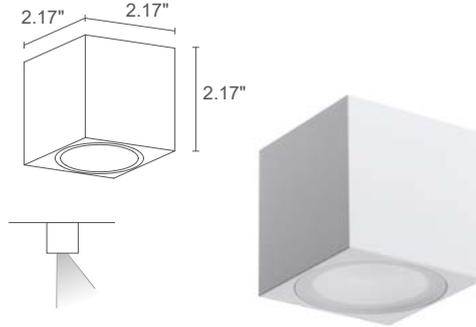

CUBE C 1.3



POWER / MODEL CODE

max 6W max 500mA blue/white light
CU1232 ■ ■ ■ **E** White
CU1232 ■ ■ ■ **H** Anthracite
CU1232 ■ ■ ■ **T** Cor-ten

max 3W max 350mA RGB light
CU1231 6 ■ ■ ■ **E** White
CU1231 6 ■ ■ ■ **H** Anthracite
CU1231 6 ■ ■ ■ **T** Cor-ten

max 6W max 500mA blue/white light
CU1332 ■ ■ ■ **E** White
CU1332 ■ ■ ■ **H** Anthracite
CU1332 ■ ■ ■ **T** Cor-ten

max 3W max 350mA RGB light
CU1331 6 ■ ■ ■ **E** White
CU1331 6 ■ ■ ■ **H** Anthracite
CU1331 6 ■ ■ ■ **T** Cor-ten

■ LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
■ OPTICS	S - 18° M - 28° L - 36°

■	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
■	S - 18° tilted 20° M - 28° tilted 20° L - 36° tilted 20°

LUMEN OUTPUT AT SOURCE 410 lm (3000K, 500mA)
 RGB: 197 lm, R: 62 lm G: 100 lm
 B: 35 lm (350mA)

410 lm (3000K, 500mA)
 RGB: 197 lm, R: 62 lm G: 100 lm
 B: 35 lm (350mA)

DELIVERED LUMEN OUTPUT 337 lm (3000K, 500mA, 28°)
 RGB: 163 lm, R: 51 lm G: 83 lm
 B: 29 lm (350mA, 28°)

295 lm (3000K, 500mA, 28°)
 RGB: 141 lm, R: 44 lm G: 72 lm
 B: 25 lm (350mA, 28°)

NO. AND TYPE OF LED 3 power LEDs
 1/4 ANSI BIN (white LED colour)
 50000h L90 B10 (Ta 25°C)

3 power LEDs
 1/4 ANSI BIN (white LED colour)
 50000h L90 B10 (Ta 25°C)

MATERIAL body in anodized aluminum
 lens in frosted plexiglass

body in anodized aluminum
 lens in frosted plexiglass

POWER SUPPLY UNIT Remote power supply required, not included

Remote power supply required, not included

POWER CABLES includes 2x0.98 ft single-core cables
 RGB: includes 4.92 ft PVC cable
 FROR 6x0.25 Ø0.20"

includes 2x0.98 ft single-core cables
 RGB: includes 4.92 ft PVC cable
 FROR 6x0.25 Ø0.20"

WIRING series

series

MOUNTING surface mounted (ceiling)

surface mounted (ceiling)

NOTES wall-mounted version: Cube W 1.0

wall-mounted version: Cube W 1.1




< **CUBE C 1.2**
 3000K, 6W, 18°, white

CUBE C / CUBE W


OUTDOOR CEILING MOUNTED / OUTDOOR WALL MOUNTED

CUBE C 1.2 CUBE W 1.0


S - 18°

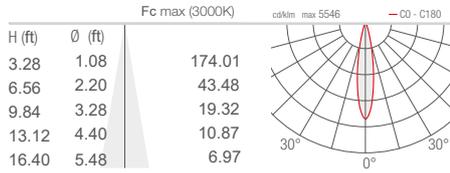

M - 28°

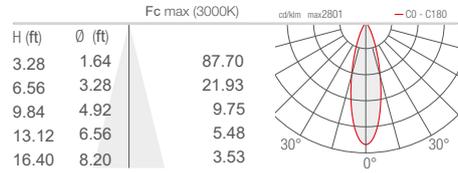


L - 36°

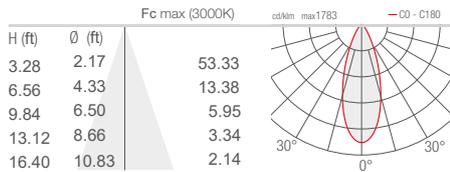


CUBE C 1.3 CUBE W 1.1

S - 18° tilted 20°

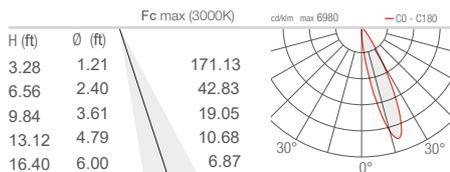

M - 28° tilted 20°

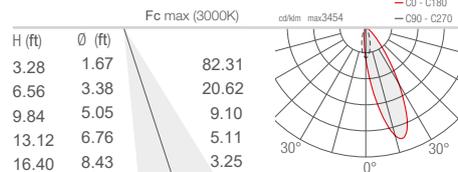

L - 36° tilted 20°

