



Divar

ILLUMINATING MEANS GIVING PLACE

Divar is a compact wall-mounted lighting fixture, available in single or dual emission and in two different sizes.

Made of die-cast and extruded aluminum with cataphoresis treatment and a layer of polyester powder coating, it is resistant to outdoor environments.

The tempered and silk-screened glass diffusers are bonded using a robotic system to ensure IP protection.

It features recessed optics and is equipped with a low-luminance screen to minimize glare.


The Power LED model comes with a transparent, silk-screened tempered glass diffuser, while the Mid-power LED model is provided with sandblasted glass to ensure uniform light emission.

In the 'recessed' version, the front frame is made of white-painted stainless steel, and installation is carried out using stainless steel springs for false ceilings, or alternatively with a casing for solid walls.








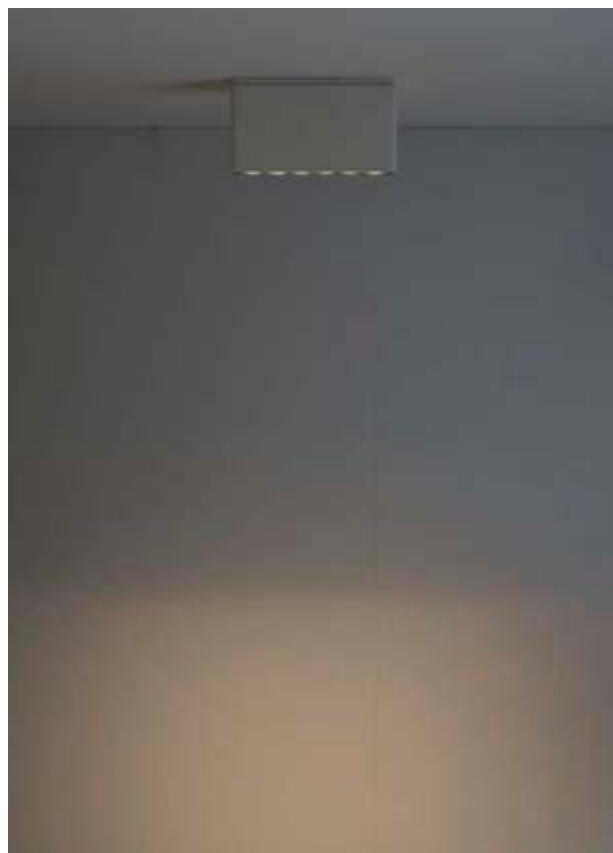

Divar

wall monoemission



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led / m
120VAC
upon request
≥80
IP65
I
wall
transparent glass
sanblasted glass

Power
LED Color temp.

120VAC 12.1W led 15.4W total
5.7W led, 7.2W total
2700K / 3000K



			lm	white	sand	graphite	aluminium	corten
2700K	120VAC	19°	1095	901032012	901032013	901032014	901032015	901032018
12.1W led		32°	1118	901031122	901031123	901031124	901031125	901031128
15.4W total		65°	1080	901031132	901031133	901031134	901031135	901031138


2700K	120VAC	diffused	501	901031022	901031023	901031024	901031025	901031028
5.7W led								
7.2W total								

			lm	white	sand	graphite	aluminium	corten
3000K	120VAC	19°	1153	901011012	901011013	901011014	901011015	901011018
12.1W led		32°	1177	901011122	901011123	901011124	901011125	901011128
15.4W total		65°	1137	901011132	901011133	901011134	901011135	901011138

3000K	120VAC	diffused	527	901011022	901011023	901011024	901011025	901011028
5.7W led								
7.2W total								

Divar

wall double emission



Available finishes:

- white
- sand
- graphite
- aluminum
- corten

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led
120VAC
upon request ≥80
IP65
I
wall transparent
glass

Power
LED Color temp.


120VAC 2x12.1W led 29.7W total
2700K / 3000K



			lm	white	sand	graphite	aluminium	corten
2700K	120VAC	19° 	2x1095	901031002	901031003	901031004	901031005	901031008
2x12.1Wled		32° 	2x1118	901031102	901031103	901031104	901031105	901031108
2x15.4W total		65° 	2x1080	901031112	901031113	901031114	901031115	901031118
3000K	120VAC	19° 	2x1153	901011002	901011003	901011004	901011005	901011008
2x12.1Wled		32° 	2x1177	901011102	901011103	901011104	901011105	901011108
2x15.4Wtotal		65° 	2x1137	901011112	901011113	901011114	901011115	901011118

Divar

wall double emission h 3.94"



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

mid power led
120VAC
upon request
≥80
IP65
I
wall
sandblasted


Power
LED Color temp.

120VAC 2x5.7W led 14.4W total
2700K / 3000K



				lm	white	sand	graphite	aluminium	corten
2700K 2x5.7W LED 2x7.2W total	120VAC	diffused		2x501	901031032	901031033	901031034	901031035	901031038
3000K 2x5.7W LED 2x7.2W total	120VAC	diffused		2x527	901011032	901011033	901011034	901011035	901011038

Divar Roof



Available finishes:



Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led / mid power led
120VAC
upon request
≥80
IP65
I
roof
transparent glass / sandblasted


Power
Led Color temp.

120VAC 12.1W led 15.4W total
5.7W led 7.2W total
2700K / 3000K



			lm	white	sand	graphite	aluminium	corten
2700K 12.1W led 15.4W total	120VAC	19°	1095	901031042	901031043	901031044	901031045	901031048
		32°	1118	901031062	901031063	901031064	901031065	901031068
		65°	1080	901031072	901031073	901031074	901031075	901031078
		diffused	501	901031052	901031053	901031054	901031055	901031058
			lm	white	sand	graphite	aluminium	corten
3000K 12.1W led 15.4W total	120VAC	19°	1153	901011042	901011043	901011044	901011045	901011048
		32°	1177	901011062	901011063	901011064	901011065	901011068
		65°	1137	901011072	901011073	901011074	901011075	901011078
		diffused	527	901011052	901011053	901011054	901011055	901011058

Divar Recessed



Available finishes:



white

Light Source
Supply
Dimmer
CRI
IP rating
Electrical Class
Application
Diffuser

power led / mid power led
120VAC
upon request
≥80
IP65
II
ceiling
transparent glass / sandblasted

Power

LED Color temp.

120VAC 12.1W led 15.4W total
5.7W led 7.2W total
2700K / 3000K




			lm	white
2700K	120VAC	19°	1095	901031142
12.1W led		32°	1118	901031152
15.4 W total		65°	1080	901031162

2700K	120VAC	diffused	501	901031172
5.7W led				
7.2W total				

			lm	white
3000K	120VAC	19°	1153	901011142
12.1W led		32°	1177	901011152
15.4W total		65°	1137	901011162

3000K	120VAC	diffused	527	901011172
5.7W led				
7.2W total				

ACCESSORIES



Metal box for concrete installation
15.16" x 6.38" x 4.92"

code **9079**



ACCESSORIES:

code **9079**