


# DX STEM Ø2.1"

DX Stem is an IP65-rated, outdoor floodlight for ground installation on a spiked stem that is extremely versatile due to its adjustability and low luminance. Available in 2 diameter sizes, each with 3 different stem heights and 2 optic options available. It comes in natural aluminum with 3 standard finishes for the accessories. Dark Sky compliant.



Fixture Dimensions

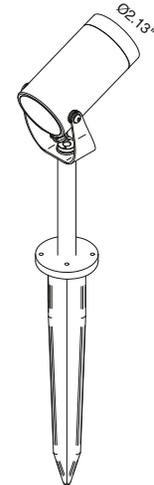

## TECHNICAL DATA

<b>Wattage / Input</b>	6.3W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: Turned Anodized Aluminum Lens: Tempered, Transparent Glass
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>80
<b>BUG Rating</b>	B1-U0-G0 (26°, 3000K)
<b>Delivered Lumens</b>	264 lm (26°, 3000K) 142 lm (52°, 3000K) Dark Sky compliant
<b>Efficacy</b>	41.9 lm/W (26°, 3000K) 22.5 lm/W (52°, 3000K)
<b>Optics</b>	26°, 52°
<b>Finishes</b>	Natural Aluminum, 3 Standard, See Below
<b>Fixture Dimensions</b>	Ø2.13" x 2.76", 6.69", 20.08" h
<b>IP Rating</b>	IP65
<b>Impact Resistance</b>	IK07

## ORDERING INFORMATION

Example: D900412119.US Accessories ordered separately.

D9004				US	
Model #	CCT	Description (Diameter, Optic, Height)	Finish	US	
D9004	32 - 2700K	11 - Ø2.1", 26°, 2.8" h, honeycomb	6 - Anod. Aluminum 9 - Anod. Bronze 7 - Anod. Black	US	
		12 - Ø2.1", 26°, 6.7" h, honeycomb			
		13 - Ø2.1", 26°, 20.1" h, honeycomb			
	12 - 3000K	30 - Ø2.1", 26°, 2.8" h, NO honeycomb			
		31 - Ø2.1", 26°, 6.7" h, NO honeycomb			
		32 - Ø2.1", 26°, 20.1" h, NO honeycomb			
		14 - Ø2.1", 52°, 2.8" h, honeycomb			14 - Ø2.1", 52°, 2.8" h, honeycomb
					15 - Ø2.1", 52°, 6.7" h, honeycomb
					16 - Ø2.1", 52°, 20.1" h, honeycomb
		33 - Ø2.1", 52°, 2.8" h, NO honeycomb			33 - Ø2.1", 52°, 2.8" h, NO honeycomb
					34 - Ø2.1", 52°, 6.7" h, NO honeycomb
					35 - Ø2.1", 52°, 20.1" h, NO honeycomb

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-12
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	2-12

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-12

## DRIVERS IN NEMA 4X ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures 6.30W
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-12

For other power supply options consult factory.

## POLE HEIGHTS

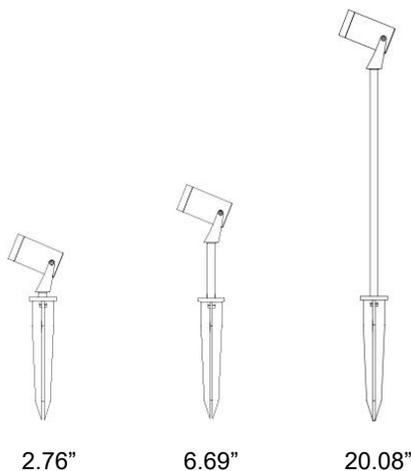

2.76"

6.69"

20.08"

## ACCESSORIES

DX Ø2.1"



**D90157**  
Tube Frame



**D90167**  
Eyelid Frame



**D9005**  
3-4 Way - 4 Poles  
Terminal Block IP68



**D9004**  
2 Way - 3 Poles  
Terminal Block IP68


Job Name/Date:

Fixture Type Designation:


# DX STEM Ø2.1"

## PHOTOMETRIC DATA

26°

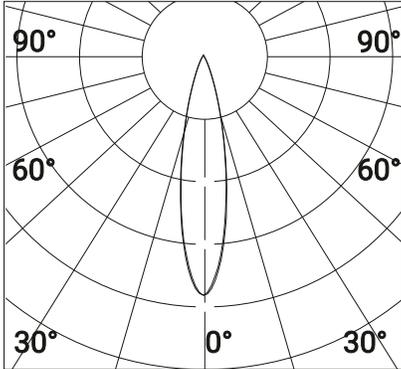

52°

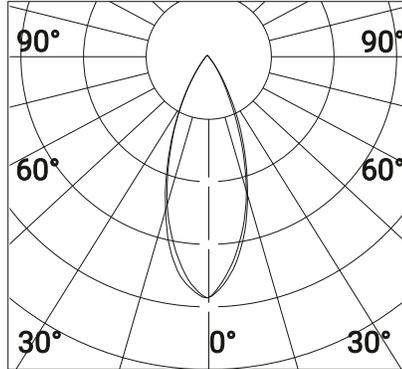

Job Name/Date:

Fixture Type Designation: