
## DOT





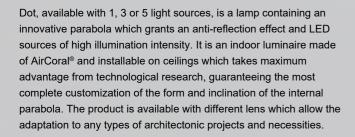

## **Surface**

A. DOT 1	B. DOT 3	C. DOT 5
2.05"	2.05"	2.05"
1.97"	1.97"	1.97"
2.83"	6.77"	10.71"

## TECHNICAL FEATURES

Code	BU1911.AC.US (fig. A)	BU1913.AC.US (fig. B)	BU1915.AC.US (fig. C)
Туре	Ceiling lamp	Ceiling lamp	Ceiling lamp
	<b>A</b>	A	A
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	9.47 ft <sup>2</sup>	23.68 ft <sup>2</sup>	37.89 ft <sup>2</sup>
Mounting	Ceiling mounting	Ceiling mounting	Ceiling mounting
IP rating	IP20	IP20	IP20
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Lamp type	LED 500mA ≒∏Þ	LED 500mA ≢∐⊅	LED 500mA ≢∐Þ
Lamp wattage	1 x 1.5W	3 x 1.5W	5 x 1.5W
Luminous efficacy	1 x 170 lm - 3000K	3 x 170 lm - 3000K	5 x 170 lm - 3000K
Light distribution	Narrow beam 15° Beam 30° (on request)	Narrow beam 15° Beam 30° (on request)	Narrow beam 15° Beam 30° (on request)
Fitting	-	-	-
Light color	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)	White 3000K White 2700K I 4000K (on request)
CRI	90	90	>90

 $<sup>^{\</sup>star}$  The absorpion capacity per ft $^{\circ}$  calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft $^{\circ}$ 



79 Trenton Avenue Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710 Fax: (908) 996-7042