


DOT


CEILING LAMP, AVAILABLE WITH 1, 3 OR 5 SOURCES, ANTI-GLARE PARABOLIC EFFECT

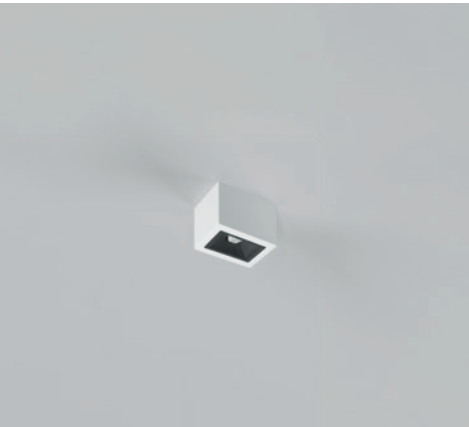


Dot

A/C


BU1911.AC



BU1913.AC



BU1915.AC



TECHNICAL FEATURES

Code	BU1911.AC	BU1913.AC	BU1915.AC
Type	Ceiling lamp	Ceiling lamp	Ceiling lamp
Material	AC: AirCoral®	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	9.47 ft²	23.68 ft²	37.89 ft²
Mounting	Ceiling mounting	Ceiling mounting	Ceiling mounting
IP rating	IP20	IP20	IP20
Control gear	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)	Remote constant current electronic driver (not included)
Lamp type	LED 500mA	LED 500mA	LED 500mA
Lamp wattage	1 × 1.5W	3 × 1.5W	5 × 1.5W
Luminous efficacy	1 × 150 lm - 3000K	3 × 150 lm - 3000K	5 × 150 lm - 3000K
Light distribution	Narrow beam 15°	Narrow beam 15°	Narrow beam 15°
Fitting	-	-	-
Light color	White 3000K	White 3000K	White 3000K
Voltage connection	By driver (optional)	By driver (optional)	By driver (optional)
CRI	>90	>90	>90
Note	Other available light colors: 2700K (on request), 4000K (on request). Other available beams: 30° (on request).	Other available light colors: 2700K (on request), 4000K (on request). Other available beams: 30° (on request).	Other available light colors: 2700K (on request), 4000K (on request). Other available beams: 30° (on request).



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²