


DRY

SQUARE WALL-RECESSED
WITH MINIMAL FOOTPRINT



Indoor Recessed

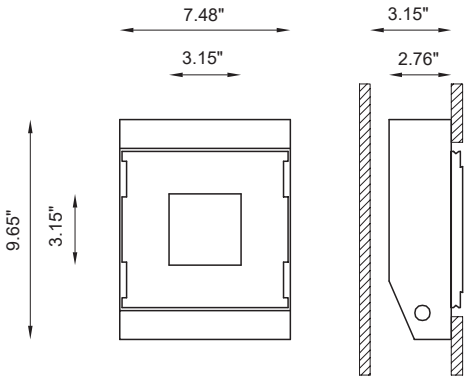


Dry



OTHER AVAILABLE CODES

BU6113.Z.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
BU6113.Z.40.AC	<i>lens</i>	40°
	<i>light color</i>	4000K (on request)

TECHNICAL FEATURES

Code	BU6113.Z.AC
Type	Wall recessed 90°
	
Material	AC: AirCoral®
Absorption capacity*	27.23 ft²
Weight	3.31 lbs
Mounting	Wall recessed
IP rating	IP40

Cut out for plasterboard	7.68 × 7.28 in
Lamp type	LED 350mA Vf: 11.5 VDC
Lamp wattage	1 × 9W
Luminous efficacy	1 × 1125 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	3.15 × 3.15 in
Voltage connection	50/60Hz
CRI	>90
Note	Extra white satin glass fixed by clip on wall level.

On request available
dimmable PUSH or DALI.

Other available light colors:
2700K,
4000K (on request).

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²