




OUTDOOR PROJECTORS ARCHITECTURAL LIGHTING FOR ARCADES, NAVES AND CLOISTERS



narrow medium wide ultra-wide elliptical



2700K 3000K 4000K



DUOMO 1.0
10W 120-277VAC
ON/OFF



DUOMO 2.0
19W 120-277VAC
ON/OFF



DUOMO 3.0
28W 120-277VAC
ON/OFF, DALI + PUSH



DUOMO 4.0
56W 120-277VAC
ON/OFF, DALI + PUSH

< **DUOMO 3.0**
3000K, 28W, 30°, antique white



IP54
SUITABLE FOR INSTALLATION
IN CLOISTERS AND COLONNADES



BUILT-IN PROTECTION SYSTEMS:
PID
PROTECTIVE IMPEDANCE DEVICE



BUILT-IN POWER
SUPPLY UNIT



DIMMING WITH DALI.
AVAILABLE ON REQUEST IN 0-10V OR PUSH VERSION,
OR WITH BLUETOOTH CONTROL



IK06
SCREEN IN 0.16 in-THICK, SERIGRAPHED
AND TRANSPARENT EXTRA-CLEAR GLASS,
TEMPERED FOR EXCELLENT IMPACT
AND SCRATCH RESISTANCE.

BODY AND BRACKET MADE OF
LOW-COPPER-CONTENT ANTICORRODAL
ALUMINIUM ALLOY EN AW 6060 T5 FOR
EXCELLENT RESISTANCE TO CORROSION



DUOMO'S ADJUSTABLE BRACKET
MEANS THE FIXTURE CAN BE
CANTILEVERED FROM CORNICES OR
OTHER ARCHITECTURAL ELEMENTS





UNIQUE SELLING POINTS



ANTIQUÉ WHITE FINISH TO VISUALLY INTEGRATE THE LIGHTING FIXTURE INTO HISTORIC BUILDINGS



WHITE



ANTHRACITE

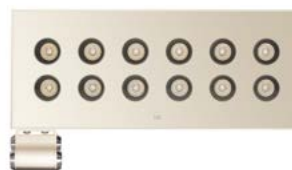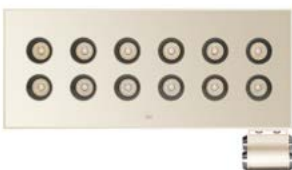


THE BRACKET CAN SLIDE ALONG THE ENTIRE LENGTH OF THE HEAD, ALLOWING THE PROJECTOR TO BE INSTALLED AND ANGLED IN TIGHT SPACES




ANTI-GLARE RECESSED OPTICS



FAST INSTALLATION: DIRECT CONNECTION BETWEEN FIXTURE AND MAINS POWER SUPPLY

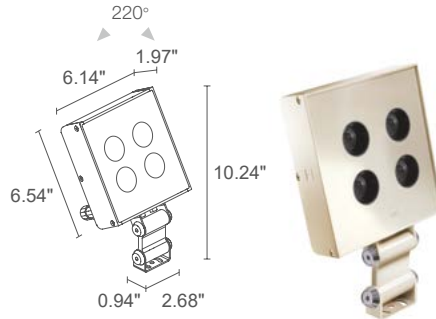

DUOMO 2.0



19W 24VDC ON/OFF

DU2010 ■ ■ ■ **0 6** Antique white

DU2010 ■ ■ ■ **0 E** White

DU2010 ■ ■ ■ **0 H** Anthracite

■	0 - CRI 80 1 - CRI >90
■	0 - not present 1 - present (not compatible with the 10° optics)
■	F - 2700K 5 - 3000K 9 - 4000K
■	T - 10° S - 14° M - 30° L - 35° J - 43° K - 63° W - 18°x44° X - 44°x18°

1760 lm (3000K, CRI 80)

1428 lm (3000K, 30°, CRI 80)

4 high-intensity power LEDs
3-step MacAdam, 50000h L90 B10 (Ta 25°C)

body and bracket in Anticorodal aluminum screen
in serigraphed, tempered, extra-clear glass



Remote not included, see datasheet

surface mounted (ceiling, wall, floor)


see accessories page

fast installation: direct connection between fixture
and mains power supply

available on request with adapter for Eurostandard
track and in DALI, 0-10V or PUSH version,
or with Bluetooth control
Casambi-compatible version, controllable with
the Casambi app, available on request

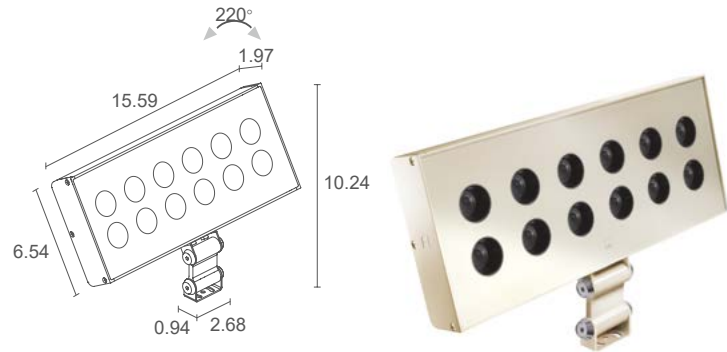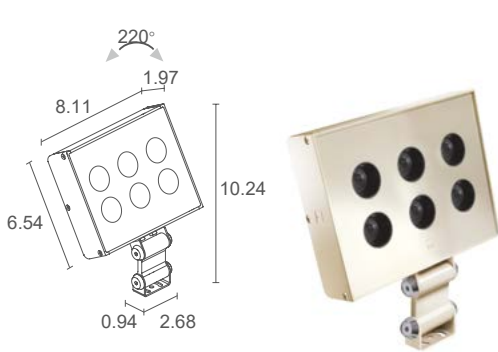

DUOMO 3.0



28W 24VDC ON/OFF

- DU3010** ■ ■ ■ **0 6** Antique white
- DU3010** ■ ■ ■ **0 E** White
- DU3010** ■ ■ ■ **0 H** Anthracite

DUOMO 4.0



56W 24VDC ON/OFF

- DU4010** ■ ■ ■ **0 6** Antique white
- DU4010** ■ ■ ■ **0 E** White
- DU4010** ■ ■ ■ **0 H** Anthracite

■	0 - CRI 80 1 - CRI >90								
■	0 - not present 1 - present (not compatible with the 10° optics)								
■	F - 2700K 5 - 3000K 9 - 4000K								
■	<table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">T - 10°</td> <td style="width: 50%;">J - 43°</td> </tr> <tr> <td>S - 14°</td> <td>K - 63°</td> </tr> <tr> <td>M - 30°</td> <td>W - 18°x44°</td> </tr> <tr> <td>L - 35°</td> <td>X - 44°x18°</td> </tr> </table>	T - 10°	J - 43°	S - 14°	K - 63°	M - 30°	W - 18°x44°	L - 35°	X - 44°x18°
T - 10°	J - 43°								
S - 14°	K - 63°								
M - 30°	W - 18°x44°								
L - 35°	X - 44°x18°								

■	0 - CRI 80 1 - CRI >90								
■	0 - not present 1 - present (not compatible with the 10° optics)								
■	F - 2700K 5 - 3000K 9 - 4000K								
■	<table style="width: 100%; border: none;"> <tr> <td style="width: 50%;">T - 10°</td> <td style="width: 50%;">J - 43°</td> </tr> <tr> <td>S - 14°</td> <td>K - 63°</td> </tr> <tr> <td>M - 30°</td> <td>W - 18°x44°</td> </tr> <tr> <td>L - 35°</td> <td>X - 44°x18°</td> </tr> </table>	T - 10°	J - 43°	S - 14°	K - 63°	M - 30°	W - 18°x44°	L - 35°	X - 44°x18°
T - 10°	J - 43°								
S - 14°	K - 63°								
M - 30°	W - 18°x44°								
L - 35°	X - 44°x18°								

2640 lm (3000K, CRI 80)
2142 lm (3000K, 30°, CRI 80)
6 high-intensity power LEDs 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
body and bracket in Anticorodal aluminum lens in serigraphed, tempered, extra-clear glass
Remote not included, see datasheet
surface mounted (ceiling, wall, floor)
see accessories page
fast installation: direct connection between fixture and mains power supply
available on request with adapter for Eurostandard track and in 0-10V or PUSH version, or with Bluetooth control Casambi-compatible version, controllable with the Casambi app, available on request

5280 lm (3000K, CRI 80)
4284 lm (3000K, 30°, CRI 80)
12 high-intensity power LED 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
body and bracket in Anticorodal aluminium screen in serigraphed, tempered, extra-clear glass
Remote not included, see datasheet
surface mounted (ceiling, wall, floor)
see accessories page
fast installation: direct connection between fixture and mains power supply
available on request with adapter for Eurostandard track and in 0-10V or PUSH version, or with Bluetooth control Casambi-compatible version, controllable with the Casambi app, available on request







ACCESSORIES

ACCESSORIES



WFA00

2-pin male connector
for in/out connection - IP68
(on/off version)
(Duomo 2.0 / 3.0 / 4.0)

WFA01

4-pin male connector
for in/out connection
(DALI version)
(Duomo 3.0 / 4.0)



WMA006 - Antique white

WMA00E - White

WMA00H - Anthracite


Adjustable bracket




OUTDOOR PROJECTORS

DUOMO 1.0


T - 10° CRI 80

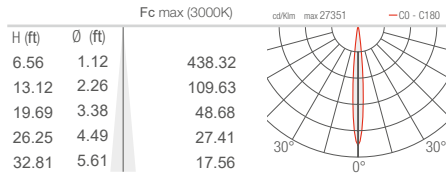


S - 14° CRI 80

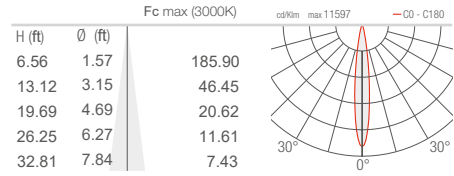


M - 30° CRI 80

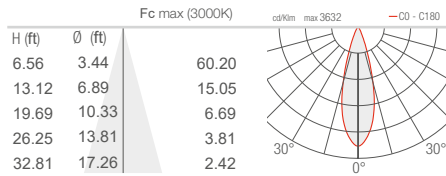


L - 35° CRI 80

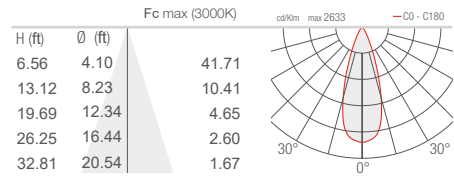


J - 43° CRI 80

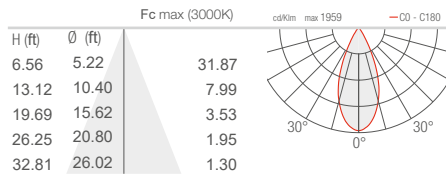


K - 63° CRI 80

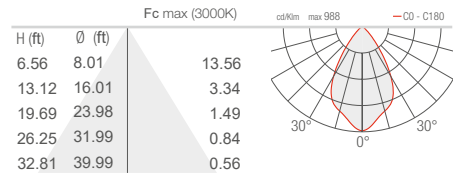

W - 18°x44° CRI 80

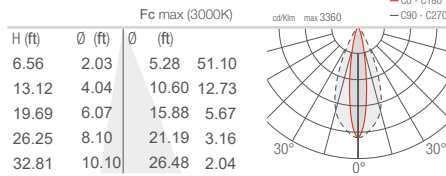


X - 44°x18° CRI 80

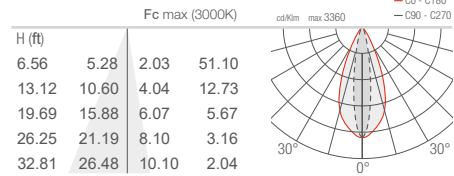


DUOMO 2.0


T - 10° CRI 80

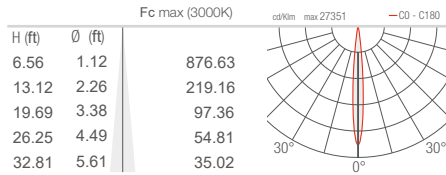


S - 14° CRI 80

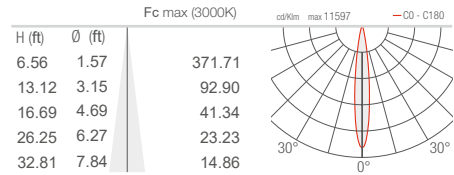

M - 30° CRI 80

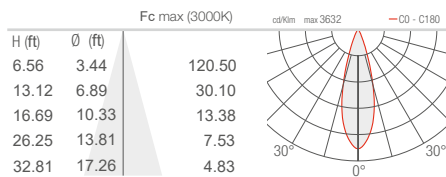


L - 35° CRI 80

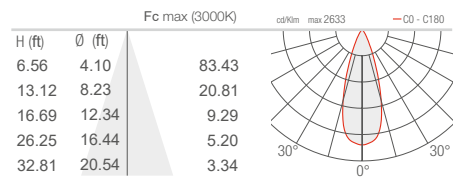


DUOMO 2.0


J - 43° CRI 80

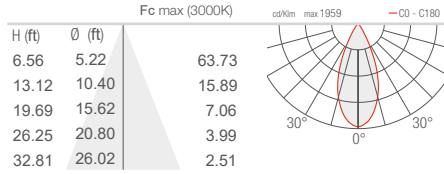


K - 63° CRI 80

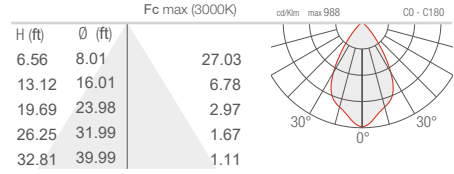

W - 18°x44° CRI 80

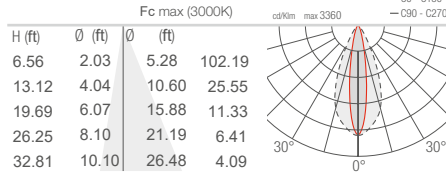


X - 44°x18° CRI 80

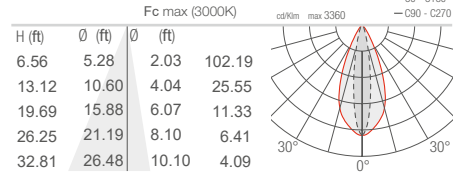


DUOMO 3.0


T - 10° CRI 80

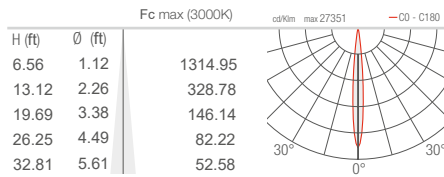


S - 14° CRI 80

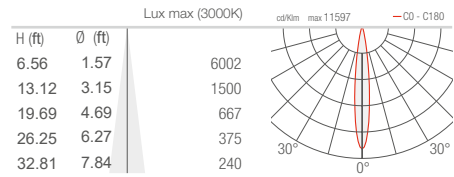


M - 30° CRI 80

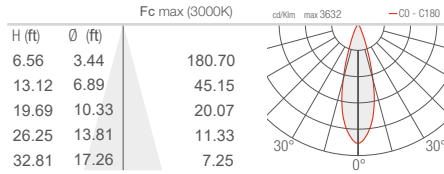


L - 35° CRI 80

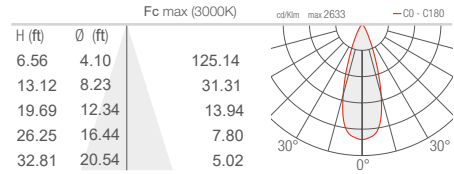


J - 43° CRI 80

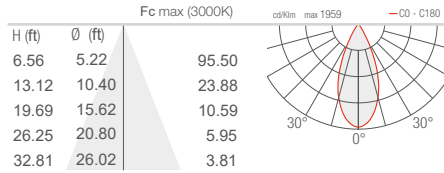


K - 63° CRI 80

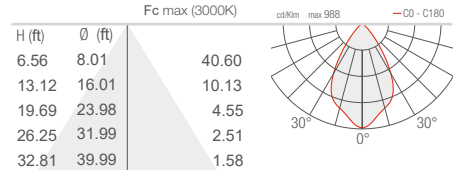

W - 18°x44° CRI 80

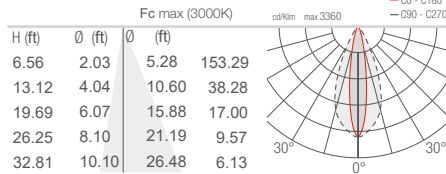


X - 44°x18° CRI 80

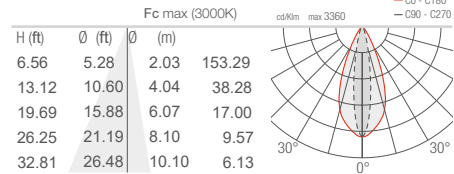


DUOMO 4.0


T - 10° CRI 80

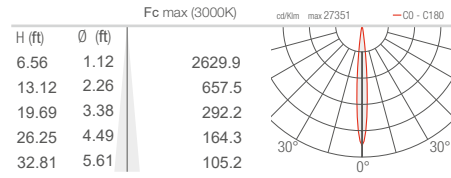


S - 14° CRI 80

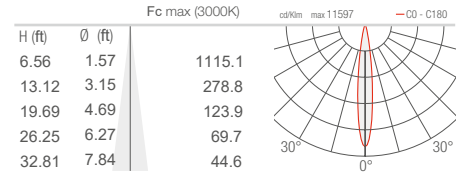


M - 30° CRI 80

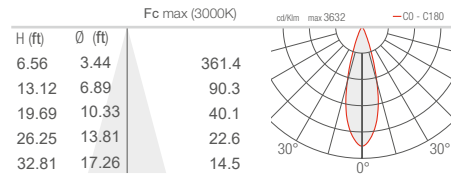


L - 35° CRI 80

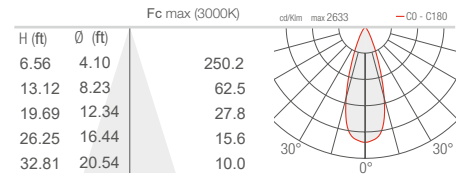


J - 43° CRI 80

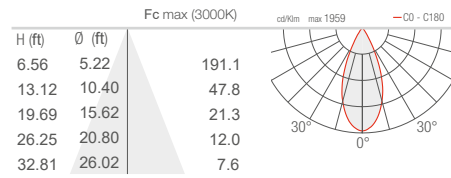

K - 63° CRI 80

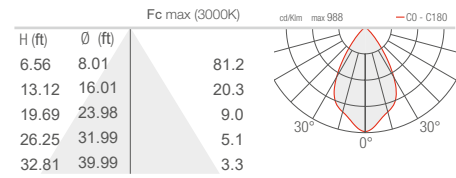

W - 18°x44° CRI 80

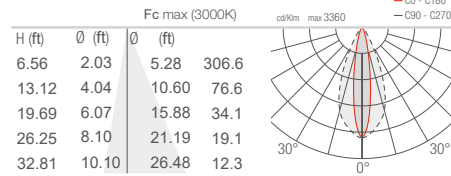

X - 44°x18° CRI 80

