

E-BD23

BOLLARD WITH ASHTRAY


The E-BD23 Bollard with Integrated Ashtray has a removable cap to make maintenance easier. Optional additional lighting at ground level. Made of stainless steel with a polyester powder coat finish.



Fixture Dimensions
Ø4.5" x 35.4" h

TECHNICAL DATA

Wattage / Input	7.2W (120-277V)
Power Supply	Integral
Construction	Body: Stainless Steel Buried Base: Hot-dip Galvanized Steel Flange Plate: Stainless Steel LED Component: Aluminum, sealed with Polyurethane Resin Designed for feed-through wiring
CCT	4000K
CRI	>80
Optics	Ground Illumination Component: Diffuse
Finishes	Silver Gray Polyester Powder Coated (DB 703), Custom RAL Upon Request
Fixture Dimensions	Ø4.5" x 35.4" h
Fixture Weight	25.35 lbs
LED Source	1 LED module with 6 high-performance LEDs (Ground Illumination Component)
Color Consistency	3-Step MacAdam
Operating Temp.	-13°F to +122°F
IP Rating	IP65
Impact Rating	IK10

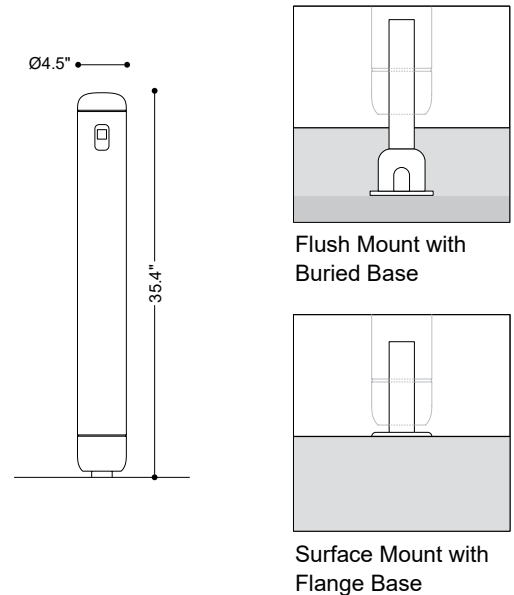

ORDERING INFORMATION

Example: E-BD23-3011801.

--	--

Model No.		CCT	Finish
E-BD23-3011801	Illuminated - Flush Mount with Buried Base	4000K	Silver Gray
E-BD23-3011805	Illuminated - Surface Mount with Flange Base		Consult factory for Custom RAL
E-BD23-3011809	Non Illuminated - Flush Mount with Buried Base		
E-BD23-3011810	Non Illuminated - Surface Mount with Flange Base		

Job Name/Date:

Fixture Type Designation: