

# Visible explorer

eye

design by Landa R&D

**designplan**<sup>®</sup> 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042



# eye 80

*Eye 80 has 5W power and is ideal for recessed ceiling applications, for an accurate light in any outdoor context. Eye's extra-clear transparent tempered glass widens its field of view in three different light emission models: spot, flood and wide floodlight. The body is made in die-cast aluminum. A touch of minimal light for every lighting requirement.*

EYE 80 | CEILING RECESSED





# eye 80

SPOT • FLOOD • WIDE FLOOD

5W

## TECHNICAL SPECIFICATIONS



Source lamp

SPOT

LED 5W

Total wattage

FLOOD

5W

Voltage

24VDC

24VDC

Control

Power supply not included • dimmable through power supply

Power supply not included • dimmable through power supply

Light color

3000K • other colors on request

3000K • other colors on request

Delivered lumens

220 lm (500 lm\*)

400 lm (500 lm\*)

\*Source lumens

220 lm (500 lm\*)

400 lm (500 lm\*)

Luminous efficacy

44 lm/W

80 lm/W

McADAM steps

3

3

Beam

20°

40°

CRI

> 90

> 90

Lifetime

L70 > 50.000 h Ta 40°C

L70 > 50.000 h Ta 40°C

IP rating





IP65

IP67

IK rating



IK08

IK08




## TECHNICAL SPECIFICATIONS

WIDE FLOOD	
Source lamp	LED 5W
Total wattage	5W
Voltage	24VDC
Control	Power supply not included • dimmable through power supply
Light color	3000K • other colors on request
Delivered Lumens	
*Source lumens	460 lm (500 lm*)
Luminous efficacy	92 lm/W
McADAM steps	3
Beam	60°
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP67
IK rating	IK08






4.80"



3.15"



## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear glass
Finishing	White polyester powder paint

## ORDER CODE

EY 50 ISO - H B 7 Z U




S	Spot
F	Flood
W	Wide flood


Example

EY 50 ISO S H B 7 Z U


recessed installation



flush installation



protruding installation



## INCLUDED ACCESSORIES

Code	Description
-	Housing box

## AVAILABLE ACCESSORIES

Code	Description
00KEY50	Levelling kit
010829600000	Plastering rim
0303003	Suction cup to screw the glass



# eye 125

Recessed ceiling luminaire ideal for outdoor contexts of any type, with accuracy and infallibility. Eye 125 is a product with a power of 12W, color temperature 3000K (2700K - 4000K on request) and light emission available in three options: spot, flood and wide flood. The die-cast aluminum body guarantees performance and longevity.

EYE 125 | CEILING RECESSED





# eye 125





12W

SPOT • FLOOD • WIDE FLOOD





## TECHNICAL SPECIFICATIONS


	SPOT	FLOOD
Source lamp	LED 12W	LED 12W
Total wattage	14.5W	14.5W
Voltage	350mA, 50-60Hz	350mA, 50-60Hz
Control	See remote drivers, not included	See remote drivers, not included
Light color	3000K • other colors on request	3000K • other colors on request
Delivered Lumens *Source lumens	785 lm (1500 lm*)	950 lm (1500 lm*)
Luminous efficacy	52 lm/W	63 lm/W
McADAM steps	3	3
Beam	20°	40°
CRI	> 90	> 90
Lifetime	L70 > 50.000 h Ta 40°C	L70 > 50.000 h Ta 40°C
IP rating	IP65	IP65
IK rating	IK08	IK08




## TECHNICAL SPECIFICATIONS

WIDE FLOOD	
Source lamp	LED 12W
Total wattage	14.5W
Voltage	350mA, 50-60Hz
Control	See remote drivers, not included
Light color	3000K • other colors on request
Delivered lumens	
*Source lumens	1200 lm (1500 lm*)
Luminous efficacy	80 lm/W
McADAM steps	3
Beam	60°
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

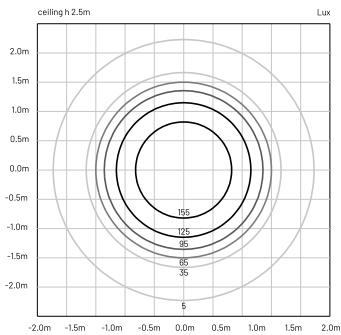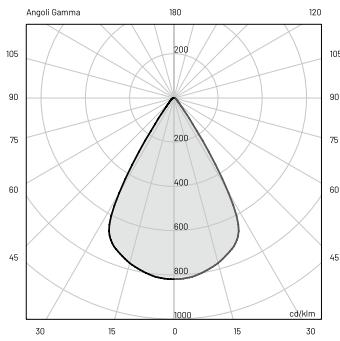


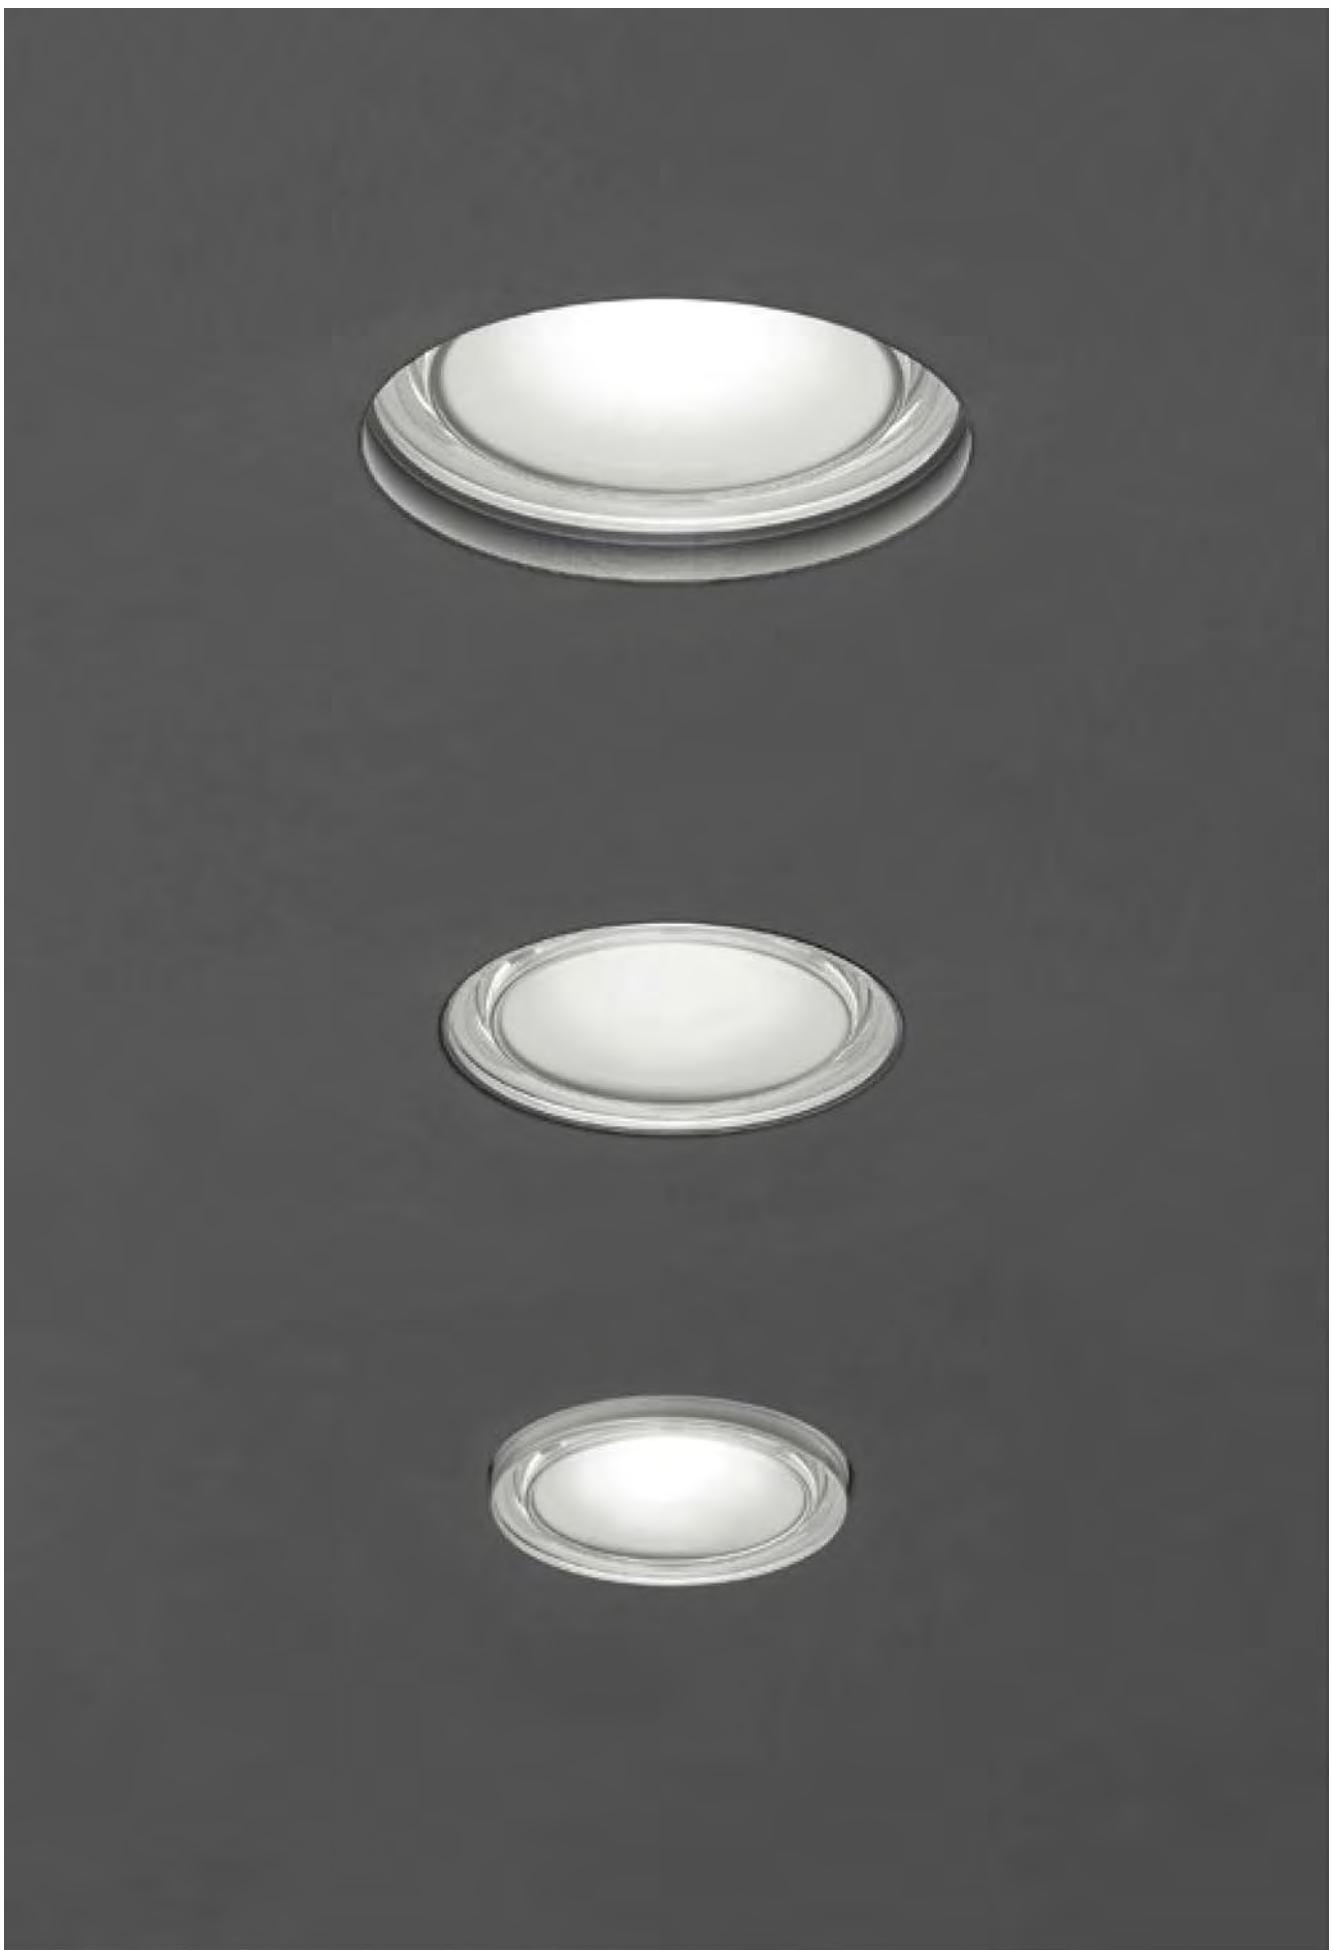

6.57"



4.92"



## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear glass
Finishing	White polyester powder paint

## ORDER CODE

EY 6 0 ISO \_ HBAZ U



Beam

S Spot


F Flood

W Wide flood


Example

EY 6 0 ISO S HBAZ U


recessed installation



flush installation



protruding installation



## INCLUDED ACCESSORIES

Code	Description
-	Housing box

## AVAILABLE ACCESSORIES

Code	Description
00KEY60	Levelling kit
010829700000	Plastering rim
0303004	Suction cup to screw the glass







# eye 200

Eye 200 recessed ceiling is synonymous with high light efficiency and perfect light control. Eye 200 is the best choice for an outdoor environment without shadows. A powerful 20W heart and three types of light emission (spot, flood, wide flood) and standard color temperature 3000K (on request 2700K or 4000K).

EYE 200 | CEILING RECESSED





# eye 200





20W

SPOT • FLOOD • WIDE FLOOD





## TECHNICAL SPECIFICATIONS

	SPOT	FLOOD
Source lamp	LED 20W	LED 20W
Total wattage	24W	24W
Voltage	500mA, 50-60Hz	500mA, 50-60Hz
Control	See remote drivers, not included	See remote drivers, not included
Light color	3000K • other colors on request	3000K • other colors on request
Delivered lumens	916 lm (2250 lm*)	1400 lm (2250 lm*)
*Source lumens		
Luminous efficacy	39 lm/W	58 lm/W
McADAM steps	3	3
Beam	20°	40°
CRI	> 90	> 90
Lifetime	L70 > 50.000 h Ta 40°C	L70 > 50.000 h Ta 40°C
IP rating	IP65	IP65
IK rating	IK08	IK08




## TECHNICAL SPECIFICATIONS

WIDE FLOOD	
Source lamp	LED 20W
Total wattage	24W
Voltage	500mA, 50-60Hz
Control	See remote drivers, not included
Light color	3000K • other colors on request
Delivered lumens	
*Source lumens	1650 lm (2250 lm*)
Luminous efficacy	69 lm/W
McADAM steps	3
Beam	60°
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08





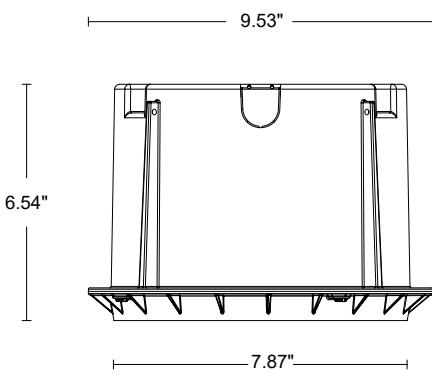

## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear glass
Finishing	White polyester powder paint

## ORDER CODE


EY 80 ISO \_ HBDZ U




<b>S</b>	Spot
<b>F</b>	Flood
<b>W</b>	Wide flood

Example


**EY 80 ISO S HBDZ U**

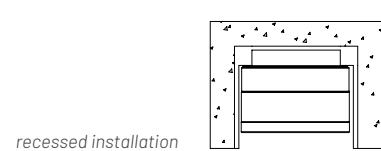

recessed installation



flush installation

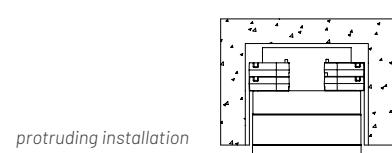

protruding installation

## INCLUDED ACCESSORIES

Code	Description
-	Housing box

## AVAILABLE ACCESSORIES

Code	Description
00KEY80	Levelling kit
010829800000	Plastering rim
0303004	Suction cup to screw the glass



