



# Visible explorer

eye

design by Landa R&D

**designplan**<sup>®</sup> 

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042



# eye 80

*Compact and perfectly designed. Eye is a ceiling lamp that offers high luminous efficiency and perfect luminance control. The best choice for an outdoor without shadows. Eye 80 is the "small" of the range, with a power of 5W and three types of light emission (spot, flood, wide flood), standard 3000K color temperature (2700K or 4000K on request).*

EYE 80 | CEILING LAMP





# eye 80

SPOT • FLOOD • WIDE FLOOD

5W



## TECHNICAL SPECIFICATIONS

Source lamp

SPOT

LED 5W

Total wattage

FLOOD

5W

Voltage

24VDC

24VDC

Control

Power supply not included  
• dimmable through driver

3000K • other colors on request

Power supply not included  
• dimmable through driver

3000K • other colors on request

Delivered lumens

220 lm (500 lm\*)

400 lm (500 lm\*)

\*Source lumens

80 lm/W

3

40°

> 90

L70 > 50.000 h Ta 40°C

L70 > 50.000 h Ta 40°C

Luminous efficacy

IP65

IP65

McADAM steps

IK08

IK08





Beam

CRI

Lifetime



IP rating

IK rating

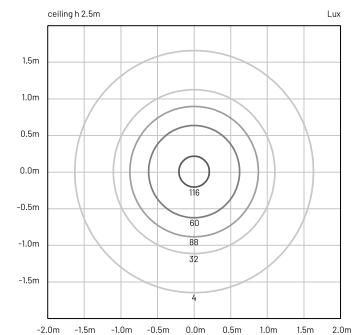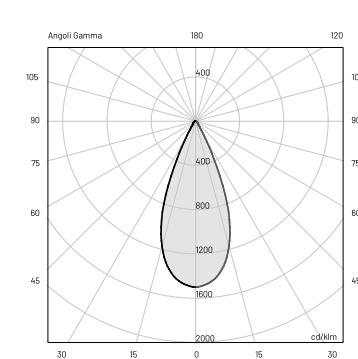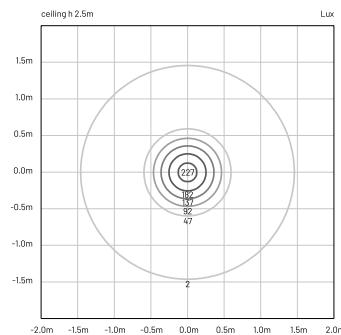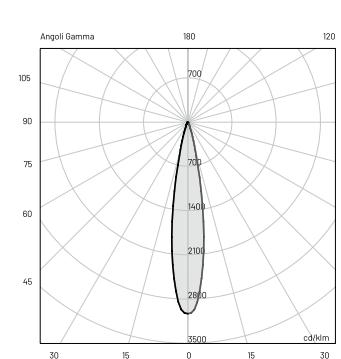


## TECHNICAL SPECIFICATIONS

WIDE FLOOD	
Source lamp	LED 5W
Total wattage	5W
Voltage	24VDC
Control	Power supply not included • dimmable through driver
Light color	3000K • other colors on request
Delivered lumens	
*Source lumens	460 lm(500 lm*)
Luminous efficacy	92 lm/W
McADAM steps	3
Beam	60°
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP 65
IK rating	IK 08

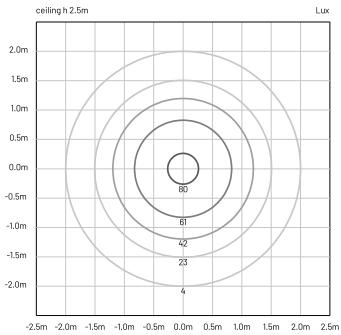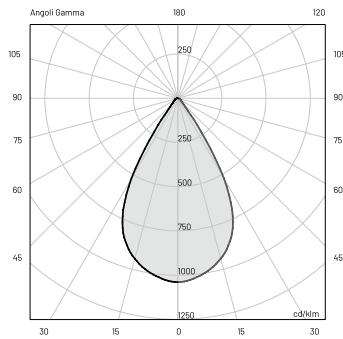




0.32"



## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear glass
Finishing	Polyester powder paint



## ORDER CODE

EY 50 POS\_H B7Z\_

Finishing

L	Graphite	
V	Oxide	
U	White	
G	Black	

Beam

S	Spot
F	Flood
W	Wide flood

Example

EY 50 POS S H B7Z L



# eye 125

Eye 125 has a power of 12W. The Eye's extra clear transparent tempered glass widens its field of view in three light emission variants: spot, flood and wide flood. Ideal for ceiling applications, for punctual light in any outdoor context, Eye 125 is resistant and highly aesthetic. The body made in die-cast aluminum is available in four different finishes: graphite, oxide, white and black.

EYE 125 | CEILING LAMP









# eye 125

12W

SPOT • FLOOD • WIDE FLOOD



## TECHNICAL SPECIFICATIONS

	SPOT	FLOOD
Source lamp	LED 12W	LED 12W
Total wattage	14.5W	14.5W
Voltage	350mA, 50-60Hz	350mA, 50-60Hz
Control	See remote drivers	See remote drivers
Light color	3000K • other colors on request	3000K • other colors on request
Delivered lumens	785 lm (1500 lm*)	950 lm (1500 lm*)
*Source lumens		
Luminous efficacy	52 lm/W	63 lm/W
McADAM steps	3	3
Beam	20°	40°
CRI	> 90	> 90
Lifetime	L70 > 50.000 h Ta 40°C	L70 > 50.000 h Ta 40°C
IP rating	IP65	IP65
IK rating	IK08	IK08

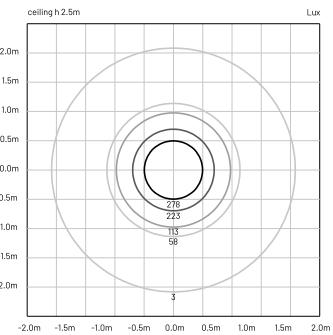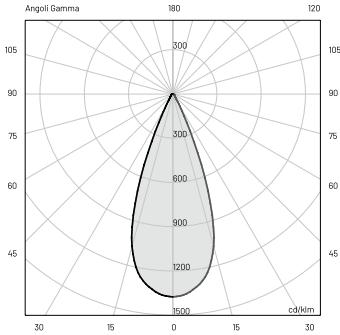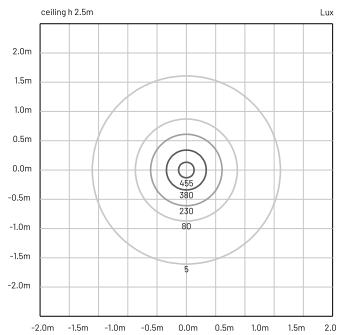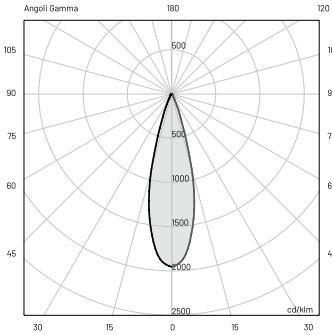


## TECHNICAL SPECIFICATIONS

WIDE FLOOD	
Source lamp	LED 12W
Total wattage	14.5W
Voltage	350mA, 50-60Hz
Control	See remote drivers
Light color	3000K • other colors on request
Delivered lumens	
*Source lumens	1200 lm (1500 lm*)
Luminous efficacy	80 lm/W
McADAM steps	3
Beam	60°
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

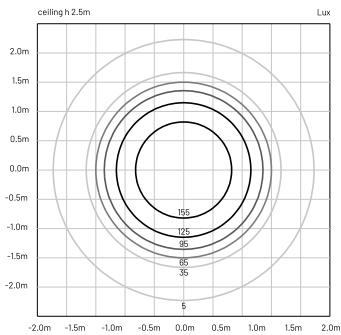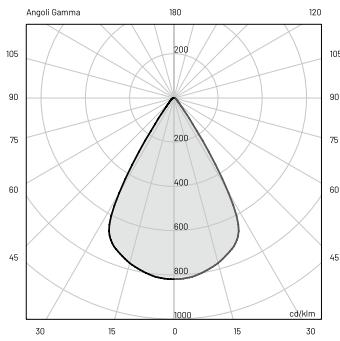




0.51"

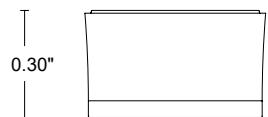

## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear glass
Finishing	Polyester powder paint



## ORDER CODE

EY 6 0 POS _ HBAZ _	Finishing	<u>L</u> Graphite	<input checked="" type="radio"/>
		<u>V</u> Oxide	<input checked="" type="radio"/>
		<u>U</u> White	<input type="radio"/>
		<u>G</u> Black	<input checked="" type="radio"/>
	Beam	<u>S</u> Spot	<input type="radio"/>
		<u>F</u> Flood	<input type="radio"/>
		<u>W</u> Wide flood	<input type="radio"/>
Example		EY 6 0 POS S HBAZ L	



# eye 200

Ceiling luminaire ideal for lighting large spaces with accuracy and infallibility. Long-lasting and performing, Eye 200 is a product with a power of 20W and spot, flood and wide flood light emission and 3000K color temperature (2700K or 4000K on request). The die-cast aluminum body, resistant even under the most extreme conditions, is available in four finishes obtained through graphite, oxide, white and black powder coating.

EYE 200 | CEILING LAMP





# eye 200





20W

SPOT • FLOOD • WIDE FLOOD

## TECHNICAL SPECIFICATIONS





	SPOT	FLOOD
Source lamp	LED 20W	LED 20W
Total wattage	24W	24W
Voltage	500mA, 50-60Hz	500mA, 50-60Hz
Control	See remote drivers	See remote drivers
Light color	3000K • other colors on request	3000K • other colors on request
Delivered lumens	916 lm (2250 lm*)	1400 lm (2250 lm*)
*Source lumens		
Luminous efficacy	39 lm/W	58 lm/W
McADAM steps	3	3
Beam	20°	40°
CRI	> 90	> 90
Lifetime	L70 > 50.000 h Ta 40°C	L70 > 50.000 h Ta 40°C
IP rating	IP65	IP65
IK rating	IK08	IK08

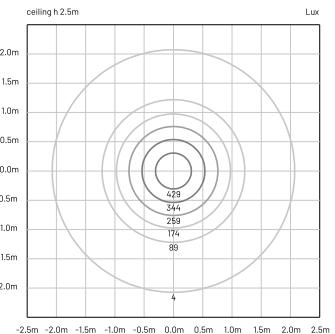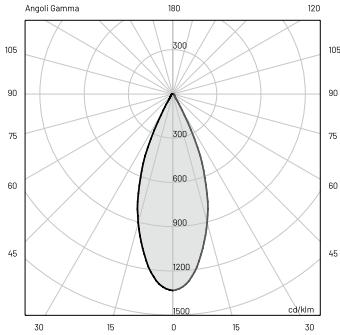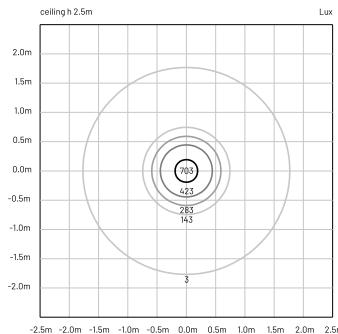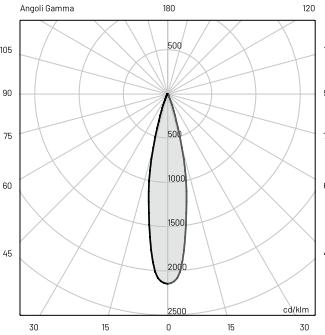


## TECHNICAL SPECIFICATIONS

WIDE FLOOD	
Source lamp	LED 20W
Total wattage	24W
Voltage	500mA, 50-60Hz
Control	See remote drivers
Light color	3000K • other colors on request
Delivered lumens	
*Source lumens	1650 lm (2250 lm*)
Luminous efficacy	69 lm/W
McADAM steps	3
Beam	60°
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

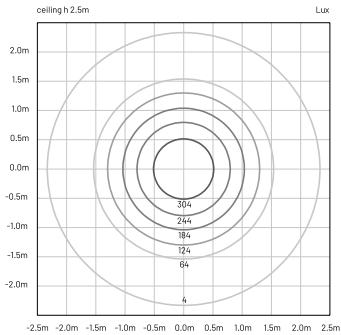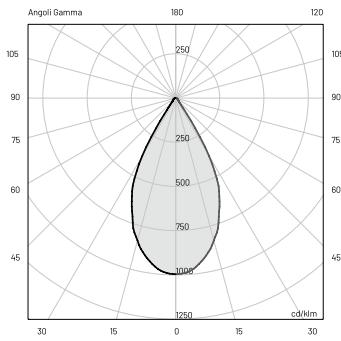




0.85"

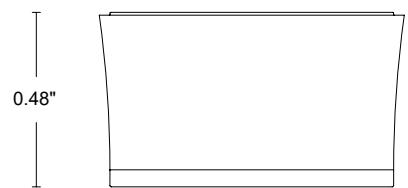

## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Extra clear glass
Finishing	Polyester powder paint

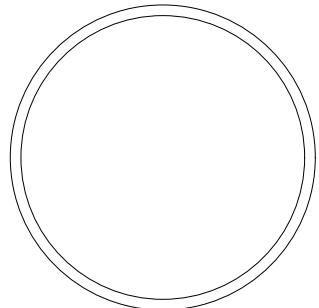

## ORDER CODE

Example	EY 8 0 POS S HBDZ L												
Finishing	<table><tr><td>L</td><td>Graphite</td><td><input checked="" type="radio"/></td></tr><tr><td>V</td><td>Oxide</td><td><input checked="" type="radio"/></td></tr><tr><td>U</td><td>White</td><td><input type="radio"/></td></tr><tr><td>G</td><td>Black</td><td><input checked="" type="radio"/></td></tr></table>	L	Graphite	<input checked="" type="radio"/>	V	Oxide	<input checked="" type="radio"/>	U	White	<input type="radio"/>	G	Black	<input checked="" type="radio"/>
L	Graphite	<input checked="" type="radio"/>											
V	Oxide	<input checked="" type="radio"/>											
U	White	<input type="radio"/>											
G	Black	<input checked="" type="radio"/>											
Beam	<table><tr><td>S</td><td>Spot</td><td><input type="radio"/></td></tr><tr><td>F</td><td>Flood</td><td><input type="radio"/></td></tr><tr><td>W</td><td>Wide flood</td><td><input type="radio"/></td></tr></table>	S	Spot	<input type="radio"/>	F	Flood	<input type="radio"/>	W	Wide flood	<input type="radio"/>			
S	Spot	<input type="radio"/>											
F	Flood	<input type="radio"/>											
W	Wide flood	<input type="radio"/>											







LANDA