


ECLA


RECESSED FIXTURE WITH RETRACTED GLASS  
AND HIGHEST INVISIBILITY

Maçka Residences, Istanbul | Armani/Casa | ph. E. Abrate

Indoor Recessed

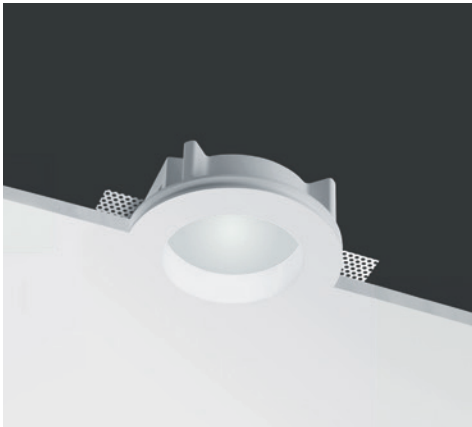


Ecla

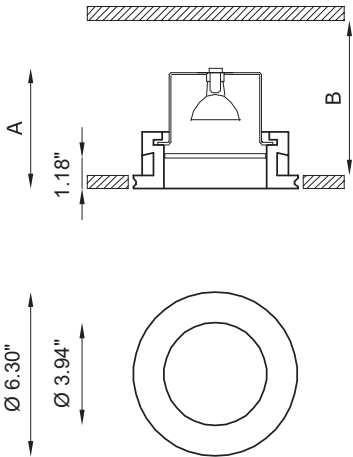

OTHER AVAILABLE CODES

BU6268.Z.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
BU6268.Z.40.AC	<i>lens</i>	40°
	<i>light color</i>	4000K
example of code composition	27	2700K
	30	3000K
	40	4000K
	BU6268.AC 4 R 40 M 30 WD	

TECHNICAL FEATURES

Code	BU6268.Z.AC
Type	Downlight 90°
	
Material	AC: AirCoral®
Absorption capacity*	29.28 ft²
Weight	2.65 lbs
Mounting	Ceiling recessed
IP rating	IP40
Control gear	Remote constant current electronic driver (not included)
Dimensions	A: 4.72 in; B: 5.12 in
Cut out for plasterboard	Ø 6.69 in
Lamp type	LED 500mA ⌚ Vf: 18 VDC
Lamp wattage	1 × 9W
Luminous efficacy	1 × 1125 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	Ø 3.94 in
Voltage connection	By driver (optional)
CRI	>90
Note	Extra white satin glass. Frosted glass recessed 1.18 in into the ceiling.  Other available light colors: 2700K, 4000K.

OPTIONAL

Brick box	cod. BR6268LT	cod. BR6213LT
-----------	---------------	---------------




79 Trenton Avenue  
Frenchtown, NJ 08825

www.designplan.com



Tel: (908) 996-7710  
Fax: (908) 996-7042

\* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²



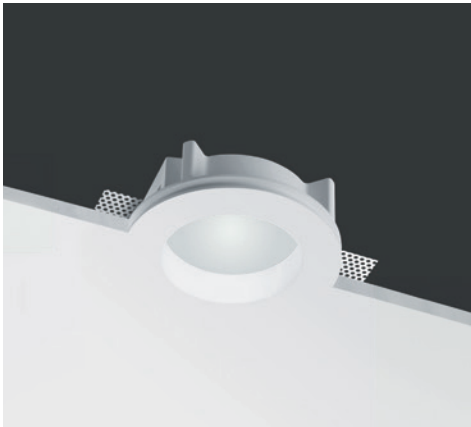


Ecla

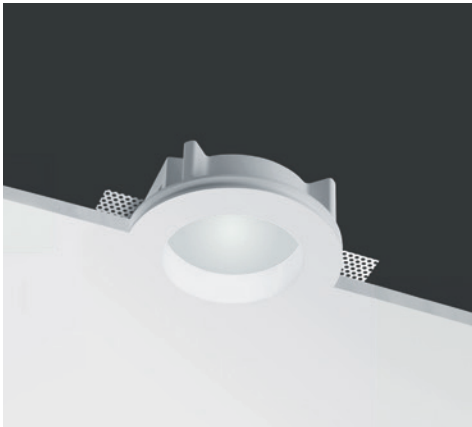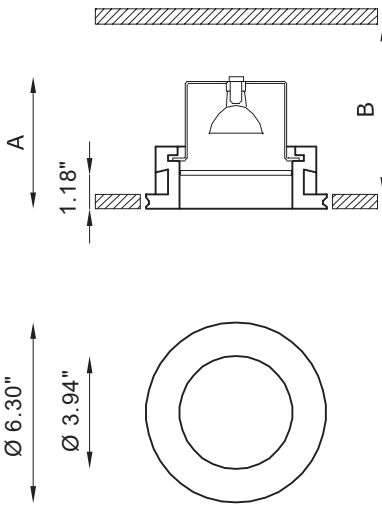

Ecla Dim To Warm



Indoor Recessed

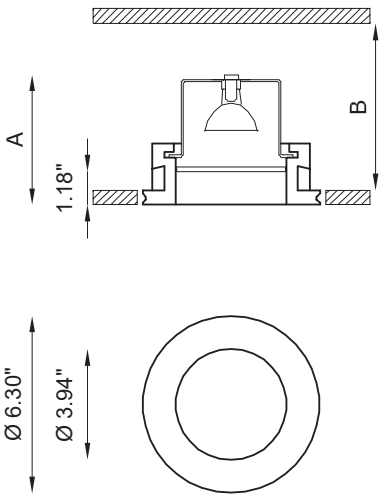

TECHNICAL FEATURES

Code	BU6265.AC
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	29.28 ft²
Weight	2.20 lbs
Mounting	Ceiling recessed
IP rating	IP40
Control gear	Electronic transformer (not included)
Dimensions	A: 4.72 in; B: 5.91 in
Cut out for plasterboard	Ø 6.69 in
Lamp type	QR CB 51
Lamp wattage	1 × 50W max
Luminous efficacy	-
Light distribution	-
Fitting	GU5.3
Light color	-
Light hole	Ø 3.94 in
Voltage connection	By driver (optional)
CRI	-
Note	Extra white satin glass. Frosted glass recessed 1.18 in into the ceiling.

OPTIONAL

Brick box	cod. BR6265LT	cod. BR6263LT
-----------	---------------	---------------

TECHNICAL FEATURES

Code	BU6215.AC 4 R 40 M 98 WD
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	29.28 ft²
Weight	2.65 lbs
Mounting	Ceiling recessed
IP rating	IP40
Control gear	Remote ON/OFF driver** (not included)
Dimensions	A: 4.72 in; B: 5.12 in
Cut out for plasterboard	Ø 6.69 in
Lamp type	LED 350 mA
	Vf: 17 VDC
Lamp wattage	1 × 6W
Luminous efficacy	1 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light color	Dimming range 1800/3000K
Light hole	Ø 3.94 in
Voltage connection	By driver (optional)
CRI	>90
Note	Extra white satin glass. Frosted glass recessed 1.18 in into the ceiling.
	**Ecla Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

OPTIONAL

Brick box	cod. BR6215LT
-----------	---------------

\* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²