


Technical features

IP65 IK08

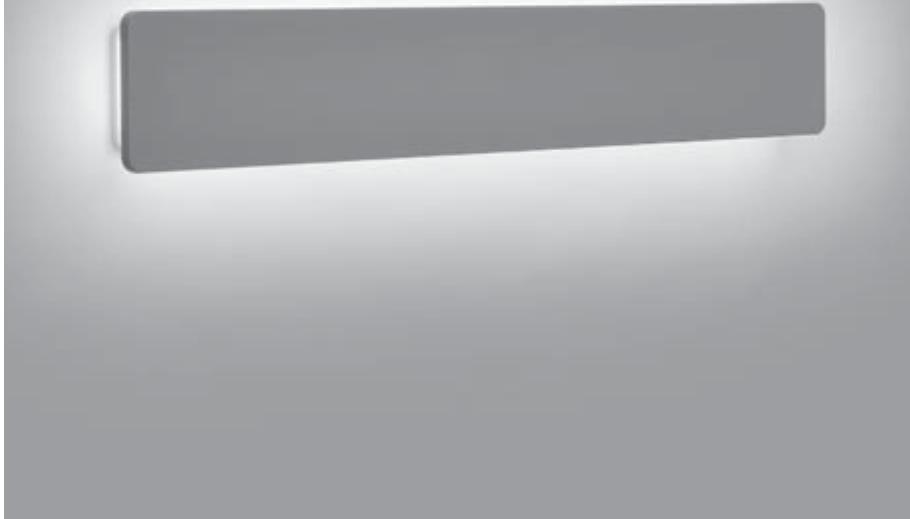


401710P

ECLIPSE LINEAR 600

Designed by
PAOLO VILLA

Rectangular wall surface-mounted luminaire creating a **diffused and discrete light** through the **fixture perimeter** on the wall. Fixture for outdoor installation on a wall. Phosphochromatised and polyester powder coated die-cast copper-free aluminum body, frosted polycarbonate diffuser, molded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with low-power CREE LED. IP65 rating.

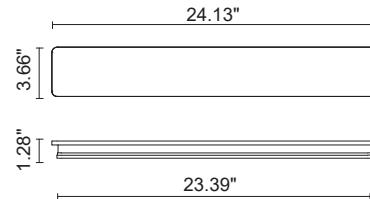

Technical data

Wattage	24W
IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	Low power CREE LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Rubber grommet	M16 Rutaseal® in EPDM
Diffuser	Polycarbonate
Gross weight	4.4 lbs



light source*	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
low power led	360°	781	32.54

* Other light colors available on request: Neutral-white

Finish color options:

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

 Matte Black
(on request)