



Ella IN is a surface wall-mounted fixture with a minimalist design for indoor applications. It comes with diffuse optics, 3 color temperatures and a variety of finish options. The fixture can be mounted directly on the wall or tilted 15° using a spacer.

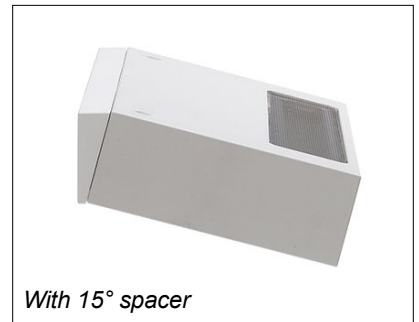

Fixture Dimensions

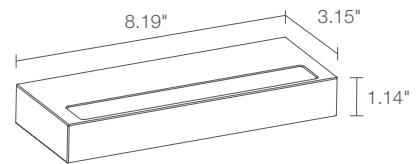

TECHNICAL DATA

| | |
|---------------------------|------------------------------------|
| Wattage / Input | 13W (24VDC) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Body: Aluminum Lens: Glass |
| CCT | 2700K, 3000K, 4000K |
| CRI | >80 |
| Delivered Lumens | 985 lm (3000K) |
| Efficacy | 75.8 lm/W (3000K) |
| Optics | Diffuse |
| Finishes | 6 Standard, Custom RAL (see below) |
| Fixture Dimensions | 8.19" l x 3.15" w x 1.14" h |
| Fixture Weight | 1.76 lbs |
| LED Source | 36 Mid-Power LEDs |
| Lumen Maintenance | L80, B10>50,000hrs (Ta 25°C) |
| Color Consistency | 3-Step MacAdam |
| Operating Temp. | 32°F to +113°F |
| IP Rating | IP40 |
| Impact Rating | IK08 |

ORDERING INFORMATION

Example: EA2010FDBN-I. Accessories / Power Supplies ordered separately.

| EA2010 | | D | | - | I |
|-----------|-------------------------------------|-------------|---|--------------------|---|
| Model No. | CCT | Optics | Finish | In / Out | |
| EA2010 | F - 2700K 5 - 3000K 9 - 4000K | D - Diffuse | BN - White CN - Chrome 1N - Pure Orange 2N - Reseda Green 3N - Capri Blue 4N - Light Ivory CR - Custom RAL <i>(consult factory for "CR")</i> | I - Inside Version | |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


24VDC

| Part Number | Description | Input/Output | # of Fixtures |
|---------------------------|---|---|---------------|
| PPLT00056 | Non-Dim | 120-277VAC to 24VDC, 26W, Class 2 | 1-1 |
| PPLT00709 | ELV / TRIAC & 0-10V Dimming | 120-277VAC to 24VDC, 96W, Class 2, DAMP | 1-5 |
| PPLT00284 | Non-Dim | 120-277VAC to 24VDC, 100W, Class 2 | 1-6 |
| PPLT00543 | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W Class 2 | 1-6 |

For other power supply options consult factory.

ACCESSORIES

Installation

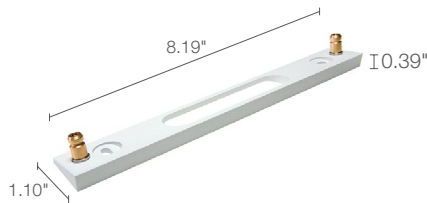

WD0602__

Spacer for 15° tilt


For Spacer include one of the below finishes:

- B** - White
- C** - Chrome
- 1** - Pure Orange
- 2** - Reseda Green
- 3** - Capri Blue
- 4** - Light Ivory
- CR** - Custom RAL (consult factory)

PHOTOMETRIC DATA

Note all Photometry is 3000K

D - Diffuse

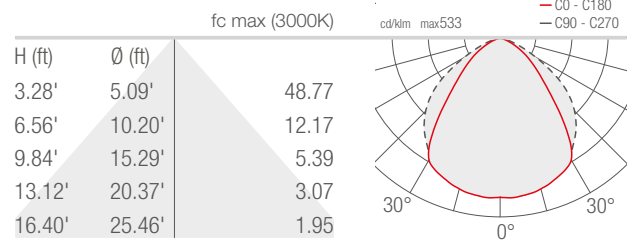

Job Name/Date:

Fixture Type Designation: