


Ella IN is a surface wall-mounted fixture with a minimalist design for indoor applications. It comes with diffuse optics, 3 color temperatures and a variety of finish options. The fixture can be mounted directly on the wall or tilted 15° using a spacer.



Fixture Dimensions

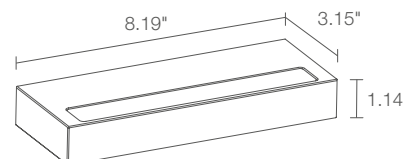

TECHNICAL DATA

Wattage / Input	13W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum Lens: Glass
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	985 lm (3000K)
Efficacy	75.8 lm/W (3000K)
Optics	Diffuse
Finishes	6 Standard, Custom RAL (see below)
Fixture Dimensions	8.19" l x 3.15" w x 1.14" h
Fixture Weight	1.76 lbs
LED Source	36 Mid-Power LEDs
Lumen Maintenance	L80, B10>50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	32°F to +113°F
IP Rating	IP40
Impact Rating	IK08

ORDERING INFORMATION

Example: EA2010FDBN-I. Accessories / Power Supplies ordered separately.

EA2010		D		-	I
Model No.	CCT	Optics	Finish	In / Out	
EA2010	F - 2700K 5 - 3000K 9 - 4000K	D - Diffuse	BN - White CN - Chrome 1N - Pure Orange 2N - Reseda Green 3N - Capri Blue 4N - Light Ivory CR - Custom RAL (consult factory for "CR")	I - Inside Version	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00709	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-5
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-6
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W Class 2	1-6

For other power supply options consult factory.

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00717



PPLT00716




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00717	ELV / TRIAC / 0-10V Dimming	120-277VAC to 24VDC, 30W, Class 2, WET/DAMP	1-1
PPLT00716	ELV / TRIAC / 0-10V Dimming	120-277VAC to 24VDC, 60W, Class 2, WET/DAMP	1-3
PPLT00715	ELV / TRIAC / 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-5

ACCESSORIES

Installation

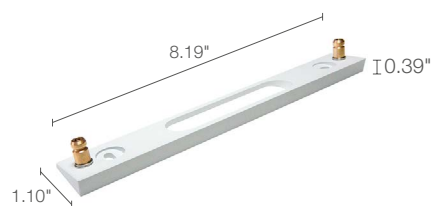

WD0602

Spacer for 15° tilt

For Spacer include one of the below finishes:

B - White

C - Chrome

1 - Pure Orange

2 - Reseda Green

3 - Capri Blue

4 - Light Ivory


CR - Custom RAL (consult factory)

PHOTOMETRIC DATA

Note all Photometry is 3000K

D - Diffuse

		fc max (3000K)	cd/klm max533
H (ft)	Ø (ft)		
3.28'	5.09'	48.77	
6.56'	10.20'	12.17	
9.84'	15.29'	5.39	
13.12'	20.37'	3.07	
16.40'	25.46'	1.95	



Job Name/Date:

Fixture Type Designation: