

ELLA OUT 1.0


Ella OUT is a surface or wall-mounted fixture with a square design for outdoor applications. It comes in 3 different lengths with diffuse optics, 3 color temperatures and 4 finish options. The fixture can be mounted directly on the wall or tilted 15° using a spacer.



TECHNICAL DATA

| | |
|---------------------------|------------------------------------|
| Wattage / Input | 7W (24VDC) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Body: Aluminum Lens: Glass |
| CCT | 2700K, 3000K, 4000K |
| CRI | >80 |
| Delivered Lumens | 493 lm (3000K) |
| Efficacy | 70.4 lm/W (3000K) |
| Optics | Diffuse |
| Finishes | 4 Standard, Custom RAL (see below) |
| Fixture Dimensions | 4.84" l x 3.15" w x 1.14" h |
| Fixture Weight | 0.88 lbs |
| LED Source | 18 Mid-Power LEDs |
| Lumen Maintenance | L80, B10>50,000hrs (Ta 25°C) |
| Color Consistency | 3-Step MacAdam |
| Operating Temp. | -4°F to +113°F |
| IP Rating | IP65 |
| Impact Rating | IK08 |

Fixture Dimensions

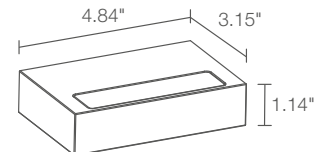

ORDERING INFORMATION

Example: EA1010FDFT-O. Accessories / Power Supplies ordered separately.

| EA1010 | | D | | O |
|-----------|-------------------------------------|-------------|---|---------------------|
| Model No. | CCT | Optics | Finish | In / Out |
| EA1010 | F - 2700K 5 - 3000K 9 - 4000K | D - Diffuse | ET - White FT - Gray HT - Anthracite TT - Cor-ten CR - Custom RAL (Consult factory for "CR") | O - Outside Version |

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES


24VDC

| Part Number | Description | Input/Output | # of Fixtures |
|---------------------------|---|-----------------------------------|---------------|
| PPLT00275 | Non-Dim | 120-277VAC to 24VDC, 12W, Class 2 | 1-1 |
| PPLT00632 | 0-10V Dimming (Dim to Off) | 120-277VAC to 24VDC, 12W, Class 2 | 1-1 |
| PPLT00056 | Non-Dim | 120-277VAC to 24VDC, 26W, Class 2 | 1-2 |
| PPLT00599 | ELV / TRIAC & 0-10V Dimming (100 to 0%) | 120-277VAC to 24VDC, 96W, Class 2 | 1-10 |
| PPLT00543 | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W Class 2 | 2-11 |

For other power supply options consult factory.

ACCESSORIES

Installation

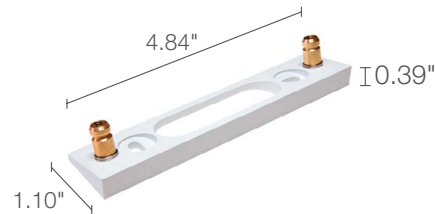

WD0651__

Spacer for 15° tilt


For Spacer include one of the below finishes:

- E** - White
- F** - Gray
- H** - Anthracite
- T** - Corten
- CR** - Custom RAL (consult factory)

PHOTOMETRIC DATA

Note all Photometry is 3000K

D - Diffuse

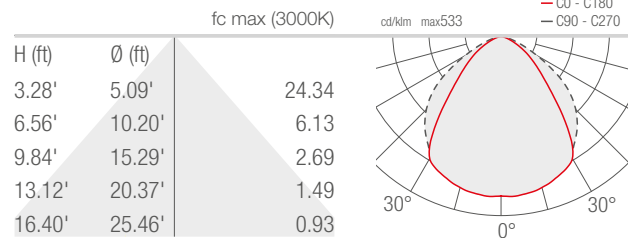

Job Name/Date:

Fixture Type Designation: