

ELLA IN

INDOOR WALL MOUNTED SINGLE BEAM, DIFFUSE LIGHT



diffuse



2700K 3000K 4000K

INDOOR

OUTDOOR

WALL MOUNTED



ELLA IN 1.0
7W 24VDC
493 lm (3000K)



ELLA IN 2.0
13W 24VDC
985 lm (3000K)



ELLA IN 3.0
19W 24VDC
1478 lm (3000K)

ELLA OUT



CEILING MOUNTED ELLO IN

ELLO OUT

< ELLA IN 2.0

3000K, 13W, white

Project by / arch. Fernanda Cantone
Light planning by / Light Style
Castello Tafuri Charming Suites
Portopalo di Capo Passero, Syracuse, Italy



Designplan | L&L Luce&Light

v

ELLA IN 3.0

3000K, 19W, white


ESEM MID 1.0

3000K, 3W, 22°, white, customized IP44 version

Project and light planning by / DVDV Studio Architetti

Photo by / Alessio Tamborini

Private residence, Milan, Italy

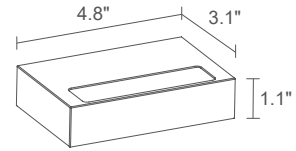

ELLA IN 1.0



0.90 lbs

IP40

IK08



POWER / MODEL CODE

7W 24VDC

EA1010 ■ **DB N** White

EA1010 ■ **DC N** Chrome

EA1010 ■ **D 1 N** Pure orange

EA1010 ■ **D 2 N** Reseda green

EA1010 ■ **D 3 N** Capri blue

EA1010 ■ **D 4 N** Light ivory

LED COLOR

F - 2700K

5 - 3000K

9 - 4000K

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE

954 lm (3000K)

DELIVERED LUMEN OUTPUT

493 lm (3000K)

NO. AND TYPE OF LED

18 mid-power LEDs
3-step MacAdam, 50000h L80 B10 (Ta 25°C)

MATERIAL

body in aluminum
lens in serigraphed extra-clear
microprismatic glass

POWER SUPPLY UNIT

remote power supply required, not included

MOUNTING

surface mounted (wall)



ACCESSORIES

see accessories page

NOTES

outdoor version: Ella OUT 1.0,
ceiling-mounted version: Elio IN 1.0
Casambi-compatible version, controllable with
the Casambi app, available on request



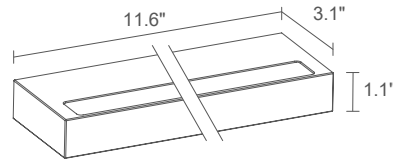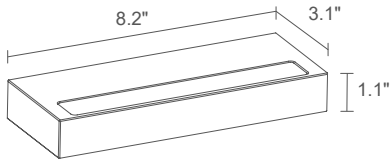

ELLA IN 2.0



LED TECH 1.8 lbs IP40 IK08

13W 24VDC

- EA2010** **DB N** White
- EA2010** **DC N** Chrome
- EA2010** **D 1 N** Pure orange
- EA2010** **D 2 N** Reseda green
- EA2010** **D 3 N** Capri blue
- EA2010** **D 4 N** Light ivory

- F** - 2700K
- 5** - 3000K
- 9** - 4000K

diffuse

1908 lm (3000K)

985 lm (3000K)

36 mid-power LEDs
3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminum
lens in serigraphed extra-clear
microprismatic glass

remote power supply required, not included

surface mounted (wall)

see accessories page

outdoor version: Ella OUT 2.0
ceiling-mounted version: Ello IN 2.0
Casambi-compatible version, controllable with
the Casambi app, available on request

ELLA IN 3.0



LED TECH 2.6 lbs IP40 IK08

19W 24VDC

- EA3010** **DB N** White
- EA3010** **DC N** Chrome
- EA3010** **D 1 N** Pure orange
- EA3010** **D 2 N** Reseda green
- EA3010** **D 3 N** Capri blue
- EA3010** **D 4 N** Light ivory

- F** - 2700K
- 5** - 3000K
- 9** - 4000K

diffuse

2862 lm (3000K)

1478 lm (3000K)

54 mid-power LEDs
3-step MacAdam, 50000h L80 B10 (Ta 25°C)


body in aluminum
lens in serigraphed extra-clear
microprismatic glass

remote power supply required, not included


surface mounted (wall)

see accessories page


outdoor version: Ella OUT 3.0
ceiling-mounted version: Ello IN 3.0
Casambi-compatible version, controllable with
the Casambi app, available on request




ACCESSORIES FOR INSTALLATION

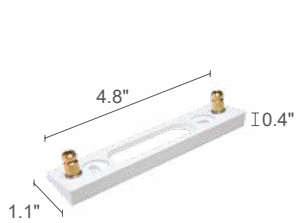

WD0601B - White
WD0601C - Chrome
WD06011 - Pure orange
WD06012 - Reseda green
WD06013 - Capri blue
WD06014 - Light ivory
Spacer for 15° inclination
RAL finish available on request
(Ella IN 1.0)

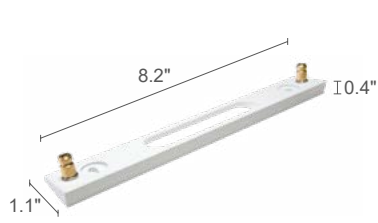

WD0602B - White
WD0602C - Chrome
WD06021 - Pure orange
WD06022 - Reseda green
WD06023 - Capri blue
WD06024 - Light ivory
Spacer for 15° inclination
RAL finish available on request
(Ella IN 2.0)

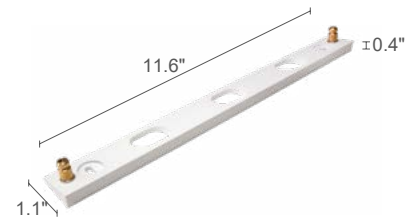

WD0603B - White
WD0603C - Chrome
WD06031 - Pure orange
WD06032 - Reseda green
WD06033 - Capri blue
WD06034 - Light ivory
Spacer for 15° inclination
RAL finish available on request
(Ella IN 3.0)

ACCESSORIES

STANDARD FINISHES



White



Chrome



Pure orange



Reseda green



Capri blue



Light ivory

∨
ELLA IN 1.0
without spacer



∨
ELLA IN 1.0
with spacer (15° inclination)




ELLA IN / ELLA OUT

INDOOR WALL MOUNTED / OUTDOOR WALL MOUNTED


ELLA IN 1.0 ELLA OUT 1.0

D - Diffuse

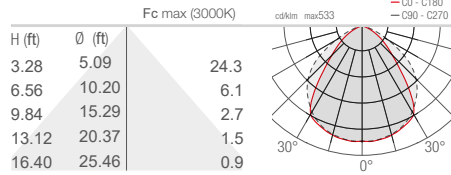

ELLA IN 2.0 ELLA OUT 2.0

D - Diffuse

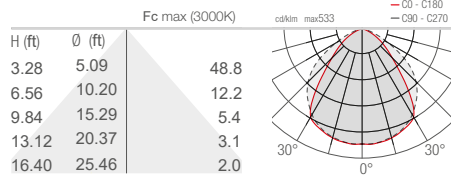

ELLA IN 3.0 ELLA OUT 3.0

D - Diffuse

