

# ELLA OUT

## OUTDOOR WALL MOUNTED SINGLE BEAM, DIFFUSE LIGHT



diffuse



2700K 3000K 4000K

**OUTDOOR**

INDOOR

WALL MOUNTED



**ELLA OUT 1.0**  
7W 24VDC  
493 lm (3000K)



**ELLA OUT 2.0**  
16W 24VDC  
985 lm (3000K)



**ELLA OUT 3.0**  
19W 24VDC  
1478 lm (3000K)

ELLA IN




CEILING MOUNTED ELLO OUT

ELLO IN





^  
**ELLA OUT 1.0**  
 3000K, 7W, diffuse, cor-ten





Project and light planning by / Lorella Marconi,  
 Cinzia Todeschini (Lucearchitettura)  
 Photo by / Alessio Tamborini  
 Magari Estates Hotel  
 Colagnola ai Colli, Verona, Italy





## ELLA OUT 1.0



LED TECH  0.88 lbs IP65 IK08 

<b>POWER / MODEL CODE</b>	7W 24VDC <b>EA1010</b>  <b>DET</b> White <b>EA1010</b>  <b>DFT</b> Grey <b>EA1010</b>  <b>DHT</b> Anthracite <b>EA1010</b>  <b>DTT</b> Cor-ten
<b>LED COLOR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K
<b>OPTICS</b>	diffuse

LUMEN OUTPUT AT SOURCE	954 lm (3000K)
DELIVERED LUMEN OUTPUT	493 lm (3000K)
NO. AND TYPE OF LED	18 mid-power LEDs 3-step MacAdam, 50000h L80 B10 (Ta 25°C)
MATERIAL	body in aluminum screen in serigraphed extra-clear microprismatic glass
POWER SUPPLY UNIT	remote power supply required, not included
POWER CABLES	includes 4.92 ft neoprene cable H05RN-F 3x1.00 Ø0.28 in
MOUNTING	surface mounted (wall)
ACCESSORIES	see accessories page
NOTES	indoor version: Ella IN 1.0, ceiling-mounted version: Ello OUT 1.0, Casambi-compatible version, controllable with the Casambi app, available on request

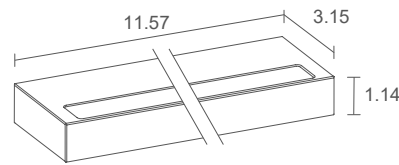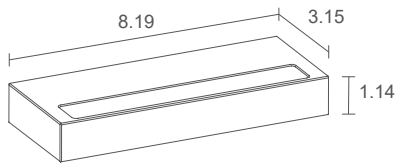

## ELLA OUT 2.0



LED TEC 1.76 lbs IP65 IK08

16W 24VDC

**EA2010** ■ **DET** White  
**EA2010** ■ **DFT** Grey  
**EA2010** ■ **DHT** Anthracite  
**EA2010** ■ **DTT** Cor-ten

■ **F** - 2700K  
**5** - 3000K  
**9** - 4000K

diffuse

1908 lm (3000K)

985 lm (3000K)

36 mid-power LEDs  
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminum  
 screen in serigraphed extra-clear  
 microprismatic glass

remote power supply required, not included

includes 4.92 ft neoprene cable  
 H05RN-F 3x1.00 Ø0.28 in

surface mounted (wall)

see accessories page

indoor version: Ella IN 2.0,  
 ceiling-mounted version: Ella OUT 2.0,  
 Casambi-compatible version, controllable with  
 the Casambi app, available on request

## ELLA OUT 3.0



LED TEC 2.65 lbs IP65 IK08

19W 24VDC

**EA3010** ■ **DET** White  
**EA3010** ■ **DFT** Grey  
**EA3010** ■ **DHT** Anthracite  
**EA3010** ■ **DTT** Cor-ten

■ **F** - 2700K  
**5** - 3000K  
**9** - 4000K

diffuse

2862 lm (3000K)

1478 lm (3000K)

54 mid-power LEDs  
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminum  
 screen in serigraphed extra-clear  
 microprismatic glass

remote power supply required, not included

includes 4.92 ft neoprene cable  
 H05RN-F 3x1.00 Ø0.28 in

surface mounted (wall)

see accessories page

indoor version: Ella IN 3.0,  
 ceiling-mounted version: Ella OUT 3.0,  
 Casambi-compatible version, controllable with  
 the Casambi app, available on request











## ACCESSORIES


### ACCESSORIES FOR INSTALLATION



**WD0651E** - White  
**WD0651F** - Grey  
**WD0651H** - Anthracite  
**WD0651T** - Cor-ten  
 Spacer for 15° inclination  
 RAL finish available on request  
 (Ella OUT 1.0)

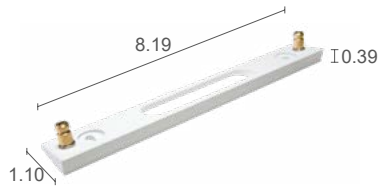

**WD0652E** - White  
**WD0652F** - Grey  
**WD0652H** - Anthracite  
**WD0652T** - Cor-ten  
 Spacer for 15° inclination  
 RAL finish available on request  
 (Ella OUT 2.0)

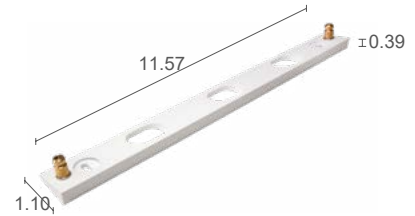

**WD0653E** - White  
**WD0653F** - Grey  
**WD0653H** - Anthracite  
**WD0653T** - Cor-ten  
 Spacer for 15° inclination  
 RAL finish available on request  
 (Ella OUT 3.0)

### STANDARD FINISHES



White



Grey



Anthracite



Cor-ten

#### < ELLA OUT 2.0

3000K, 16W, diffuse, cor-ten

Project and light planning by / Lorella Marconi,  
 Cinzia Todeschini (Lucearchitettura)  
 Photo by / Alessio Tamborini  
 Magari Estates Hotel  
 Colognola ai Colli, Verona, Italy

#### ∨ ELLA OUT 1.0

without spacer



#### ∨ ELLA OUT 1.0

with spacer (15° inclination)




# ELLA IN / ELLA OUT

INDOOR WALL MOUNTED / OUTDOOR WALL MOUNTED


## ELLA IN 1.0 ELLA OUT 1.0

D - Diffuse

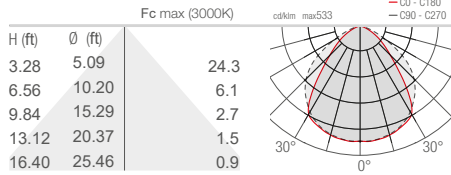

## ELLA IN 2.0 ELLA OUT 2.0

D - Diffuse

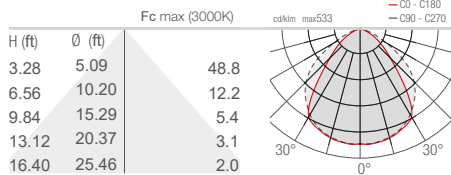

## ELLA IN 3.0 ELLA OUT 3.0

D - Diffuse

