



Ello IN is a surface ceiling-mounted fixture with a minimalist design for indoor applications. It comes in 3 different lengths with diffuse optics and 6 finish options. The fixture can be mounted directly on the ceiling or tilted 15° using a spacer.

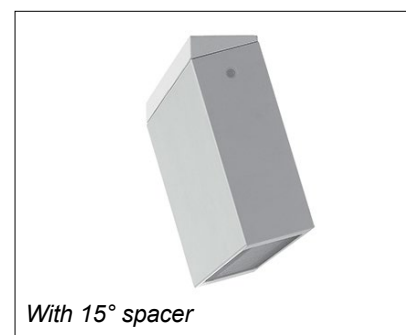

TECHNICAL DATA

Wattage / Input	15W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum Lens: Glass
CCT	2700K, 3000K, 4000K
CRI	>80
Delivered Lumens	1478 lm (3000K)
Efficacy	77.8 lm/W (3000K)
Optics	Diffuse
Finishes	6 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	11.57" l x 3.15" w x 1.14" h
Fixture Weight	2.65 lbs
LED Source	54 Mid-Power LEDs
Lumen Maintenance	L80, B10>50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	32°F to 113°F
IP Rating	IP40
Impact Rating	IK08

Fixture Dimensions

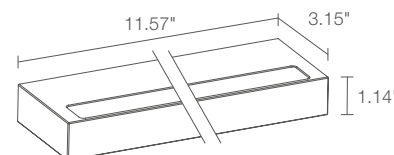

ORDERING INFORMATION

Example: EP3010FDBN-I. Accessories / Power Supplies ordered separately.

EP3010		D		-	I
Model No.	CCT	Optics	Finish	In / Out	
EP3010	F - 2700K 5 - 3000K 9 - 4000K	D - Diffuse	BN - White CN - Chrome 1N - Pure Orange 2N - Reseda Green 3N - Capri Blue 4N - Light Ivory CR - Custom RAL (consult factory for "CR")	I - Inside Version	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-5
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-5

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-5

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-5

For other power supply options consult factory.

ACCESSORIES - Installation

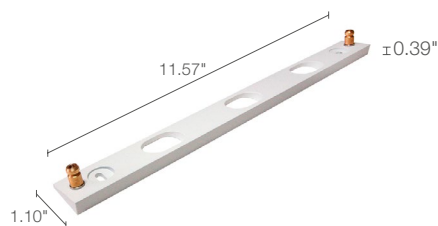

WD0603__

Spacer for 15° tilt

For Spacer include one of the below finishes:


- B** - White
- C** - Chrome
- 1** - Pure Orange
- 2** - Reseda Green
- 3** - Capri Blue
- 4** - Light Ivory
- CR** - Custom RAL (consult factory)

PHOTOMETRIC DATA

Note all Photometry is 3000K

D - Diffuse

		fc max (3000K)	cd/klm max 533
H (ft)	Ø (ft)		
3.28'	5.09'	73.11	
6.56'	10.20'	18.30	
9.84'	15.29'	8.08	
13.12'	20.37'	4.55	
16.40'	25.46'	2.88	



Job Name/Date:

Fixture Type Designation: