



Ello OUT is a surface ceiling-mounted fixture with a minimalist design for outdoor applications. It comes in 3 different lengths with diffuse optics, 3 color temperatures and 4 finish options. The fixture can be mounted directly on the ceiling or tilted 15° using a spacer.

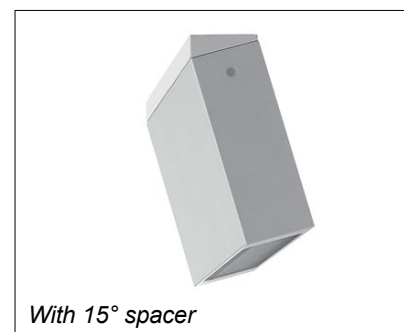

TECHNICAL DATA

Wattage / Input	13W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum Lens: Glass
CCT	2700K, 3000K, 4000K
CRI	>80
BUG Rating	B1-U1-G0 (3000K)
Delivered Lumens	985 lm (3000K)
Efficacy	75.8 lm/W (3000K)
Optics	Diffuse
Finishes	6 Standard, Custom RAL (see below) (4 Stage Marine Grade Finish)
Fixture Dimensions	8.19" l x 3.15" w x 1.14" h
Fixture Weight	1.76 lbs
LED Source	36 Mid-Power LEDs
Lumen Maintenance	L80 >50,000hrs (Ta 25°C)
Color Consistency	3-Step MacAdam
Operating Temp.	-4°F to +113°F
IP Rating	IP65
Impact Rating	IK08

Fixture Dimensions

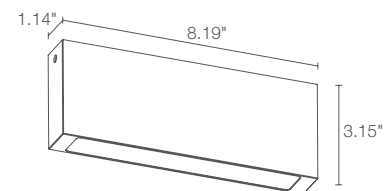

ORDERING INFORMATION

Example: EP2010FDFT-O. Accessories / Power Supplies ordered separately.

EP2010		D		-	O
Model No.	CCT	Optics	Finish	In / Out	
EP2010	F - 2700K 5 - 3000K 9 - 4000K	D - Diffuse	ET - White FT - Gray HT - Anthracite TT - Cor-ten CR - Custom RAL (consult factory for "CR")	O - Outside Version	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00709	ELV / TRIAC & 0-10V Dimming	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-5
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-6
PPLT00284	Non-Dim	120-277VAC to 24VDC, 100W, Class 2, DAMP	1-6

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00530	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-5

DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

Part Number	Description	Input/Output	# of Fixtures
PPLT00715	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-5

For other power supply options consult factory.

ACCESSORIES

Installation

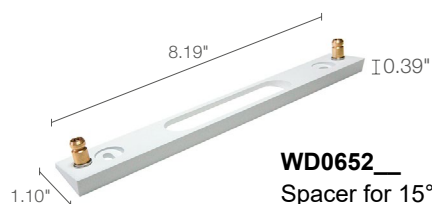

WD0652

Spacer for 15° tilt

For Spacer include one of the below finishes:

E - White

F - Gray

H - Anthracite


T - Corten

CR - Custom RAL (consult factory)

PHOTOMETRIC DATA

Note all Photometry is 3000K

D - Diffuse

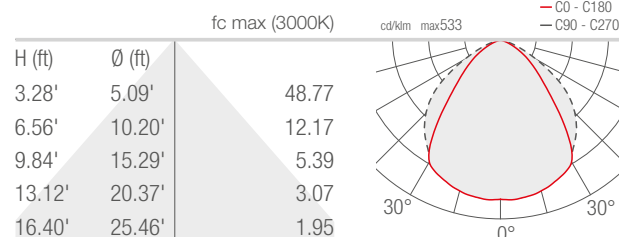

Job Name/Date:

Fixture Type Designation: