



Ello OUT is a surface ceiling-mounted fixture with a minimalist design for outdoor applications. It comes in 3 different lengths with diffuse optics, 3 color temperatures and 4 finish options. The fixture can be mounted directly on the ceiling or tilted 15° using a spacer.

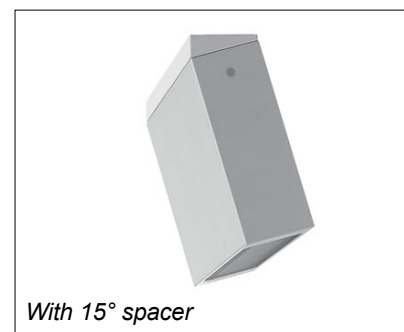

## TECHNICAL DATA

|                           |                                                                     |
|---------------------------|---------------------------------------------------------------------|
| <b>Wattage / Input</b>    | 15W (24VDC)                                                         |
| <b>Power Supply</b>       | Remote, not included. See page 2.                                   |
| <b>Construction</b>       | Body: Aluminum<br>Lens: Glass                                       |
| <b>CCT</b>                | 2700K, 3000K, 4000K                                                 |
| <b>CRI</b>                | >80                                                                 |
| <b>BUG Rating</b>         | B1-U1-G0 (3000K)                                                    |
| <b>Delivered Lumens</b>   | 1478 lm (3000K)                                                     |
| <b>Efficacy</b>           | 77.8 lm/W (3000K)                                                   |
| <b>Optics</b>             | Diffuse                                                             |
| <b>Finishes</b>           | 6 Standard, Custom RAL (see below)<br>(4 Stage Marine Grade Finish) |
| <b>Fixture Dimensions</b> | 11.57" l x 3.15" w x 1.14" h                                        |
| <b>Fixture Weight</b>     | 2.65 lbs                                                            |
| <b>LED Source</b>         | 54 Mid-Power LEDs                                                   |
| <b>Lumen Maintenance</b>  | L80 >50,000hrs (Ta 25°C)                                            |
| <b>Color Consistency</b>  | 3-Step MacAdam                                                      |
| <b>Operating Temp.</b>    | -4°F to +113°F                                                      |
| <b>IP Rating</b>          | IP65                                                                |
| <b>Impact Rating</b>      | IK08                                                                |

Fixture Dimensions

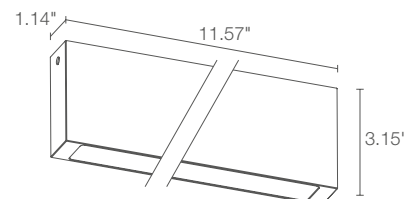

## ORDERING INFORMATION

Example: EP3010FDFT-O. Accessories / Power Supplies ordered separately.

| EP3010    |                                     | D           |                                                                                                             | -                   | O |
|-----------|-------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------|---------------------|---|
| Model No. | CCT                                 | Optics      | Finish                                                                                                      | In / Out            |   |
| EP3010    | F - 2700K<br>5 - 3000K<br>9 - 4000K | D - Diffuse | ET - White<br>FT - Gray<br>HT - Anthracite<br>TT - Cor-ten<br>CR - Custom RAL<br>(consult factory for "CR") | O - Outside Version |   |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

| Part Number               | Description                                             | Input/Output                       | # of Fixtures |
|---------------------------|---------------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00284</a> | Non-Dim                                                 | 120-277VAC to 24VDC, 100W, Class 2 | 1-5           |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 1-5           |

Suggested Lutron Compatible

| Part Number               | Option       | Lutron SKU | Dim Range | Description                                   | Input/Output                      | # of Fixtures |
|---------------------------|--------------|------------|-----------|-----------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00530</a> | L3DAE / L3D0 | L3DA/L3D0  | 100%-1%   | Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-5           |

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V




PPLT00715

| Part Number               | Description                         | Input/Output                                | # of Fixtures |
|---------------------------|-------------------------------------|---------------------------------------------|---------------|
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-5           |

For other power supply options consult factory.

## ACCESSORIES

### Installation

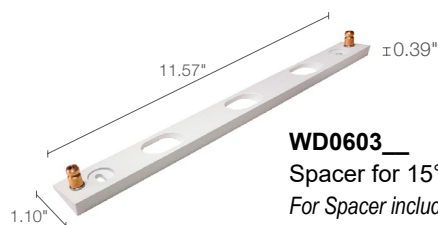

#### WD0603

Spacer for 15° tilt

For Spacer include  
one of the below finishes:

**E** - White

**F** - Gray

**H** - Anthracite

**T** - Corten


**CR** - Custom RAL (consult factory)

## PHOTOMETRIC DATA

Note all Photometry is 3000K

**D** - Diffuse

|        |        | fc max (3000K) | cd/klm max533 |
|--------|--------|----------------|---------------|
| H (ft) | Ø (ft) |                |               |
| 3.28'  | 5.09'  | 73.11          |               |
| 6.56'  | 10.20' | 18.30          |               |
| 9.84'  | 15.29' | 8.08           |               |
| 13.12' | 20.37' | 4.55           |               |
| 16.40' | 25.46' | 2.88           |               |



Job Name/Date:

Fixture Type Designation: