


Eloise is a surface mounted, IP65 rated luminaire for installation on walls and ceilings. It is available with white or black reflectors with a 360° radial light emission. It is available in 2 color temperatures and 5 standard finishes.



ADA Compliant

Fixture Dimensions

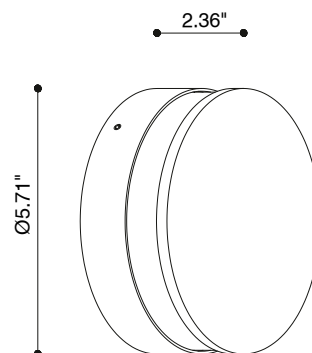

## TECHNICAL DATA

|                           |                                                                                                                         |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Wattage</b>            | 13W (120-277VAC)                                                                                                        |
| <b>Power Supply</b>       | Integral 0-10V Dimming                                                                                                  |
| <b>Construction</b>       | Body: Die-Cast Aluminum<br>Lens: Polycarbonate<br>Paint: Polyester Powder Coat with Protective Anti-Corrosion Treatment |
| <b>CCT</b>                | 2700K, 3000K                                                                                                            |
| <b>CRI</b>                | >80                                                                                                                     |
| <b>BUG Rating</b>         | B1-U3-G1 (3000K, White Reflector)<br>B0-U2-G1 (3000K, Black Reflector)                                                  |
| <b>Delivered Lumens</b>   | 901 lm (3000K, White Reflector)<br>438 lm (3000K, Black Reflector)                                                      |
| <b>Efficacy</b>           | 69.3 lm/W (3000K, White Reflector)<br>33.7 lm/W (3000K, Black Reflector)                                                |
| <b>Optics</b>             | 360°                                                                                                                    |
| <b>LED Source</b>         | Mid Power LED                                                                                                           |
| <b>Finishes</b>           | White, Sand, Graphite, Aluminum, Corten                                                                                 |
| <b>Fixture Dimensions</b> | Ø5.71" x 2.36"                                                                                                          |
| <b>IP Rating</b>          | IP65                                                                                                                    |
| <b>Impact Resistance</b>  | IK07                                                                                                                    |

## ORDERING INFORMATION

Example: D901412013.US. Remote power supply sold separately - see page 2.

| D9014     |                          |                                              |                                                                     | US |
|-----------|--------------------------|----------------------------------------------|---------------------------------------------------------------------|----|
| Model No. | CCT                      | Reflector Finish                             | Finish                                                              |    |
| D9014     | 31 - 2700K<br>11 - 3000K | 00 - White Reflector<br>01 - Black Reflector | 2 - White<br>3 - Sand<br>4 - Graphite<br>5 - Aluminum<br>8 - Corten | US |

Job Name/Date:

Fixture Type Designation:

## FINISHES



white



sand



graphite



aluminum




corten

## PHOTOMETRIC DATA


*Note: All photometry is 3000K*

Maximum Candela = 124.2

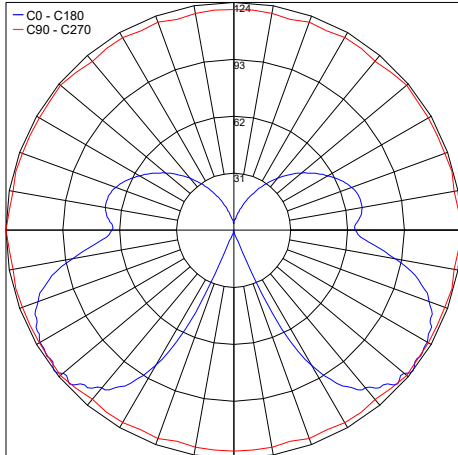

PHOTOMETRIC FILENAME : ELOISE\_WHITE REFLECTOR\_3000K.IES

Maximum Candela = 101.8

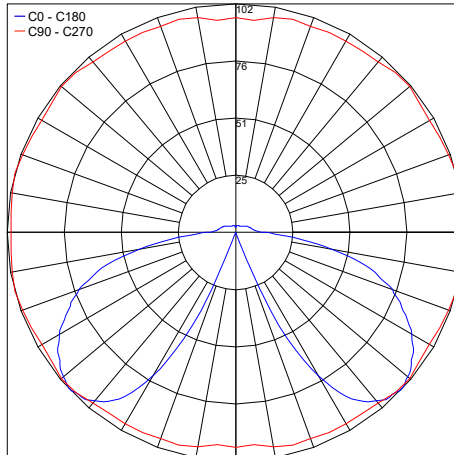

PHOTOMETRIC FILENAME : ELOISE\_BLACK REFLECTOR\_3000K.IES

Job Name/Date:

Fixture Type Designation: