

END



End



TECHNICAL FEATURES | LIGHT SOURCE

Code	BU8219
Type	Downlight 90° Wall recessed 90°
Material	-
Absorption capacity*	-
Weight	-
Mounting	-
IP rating	IP40
Control gear	Constant voltage driver (included)
Cut out for plasterboard	-
Lamp type	LED 24V
Lamp wattage	1 × 28W
Luminous efficacy	1 × 2800 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light color	White 3000K
Light hole	-
Voltage connection	24V · 50/60Hz
CRI	>90
Note	Other available light colors: 2700K (on request).


CONTINUOUS AND INDIRECT
SEMI-RECESSED LIGHT GROOVE



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com


Tel: (908) 996-7710
Fax: (908) 996-7042

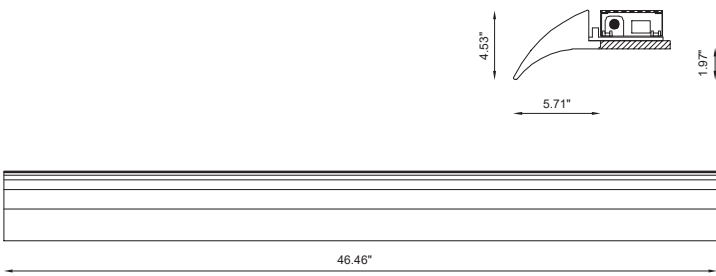

TECHNICAL FEATURES | BODYFRAME

Code	BU8200.AC
Type	-
Material	AC: AirCoral®
Absorption capacity*	242.19 ft²
Weight	13.23 lbs
Mounting	Ceiling and wall half recessed
IP rating	-
Control gear	-
Cut out for plasterboard	46.46 in for each module installed
Lamp type	-
Lamp wattage	-
Luminous efficacy	-
Light distribution	-
Fitting	-
Light colour	-
Light hole	-
Voltage connection	-
CRI	-

EXAMPLES OF INSTALLATION

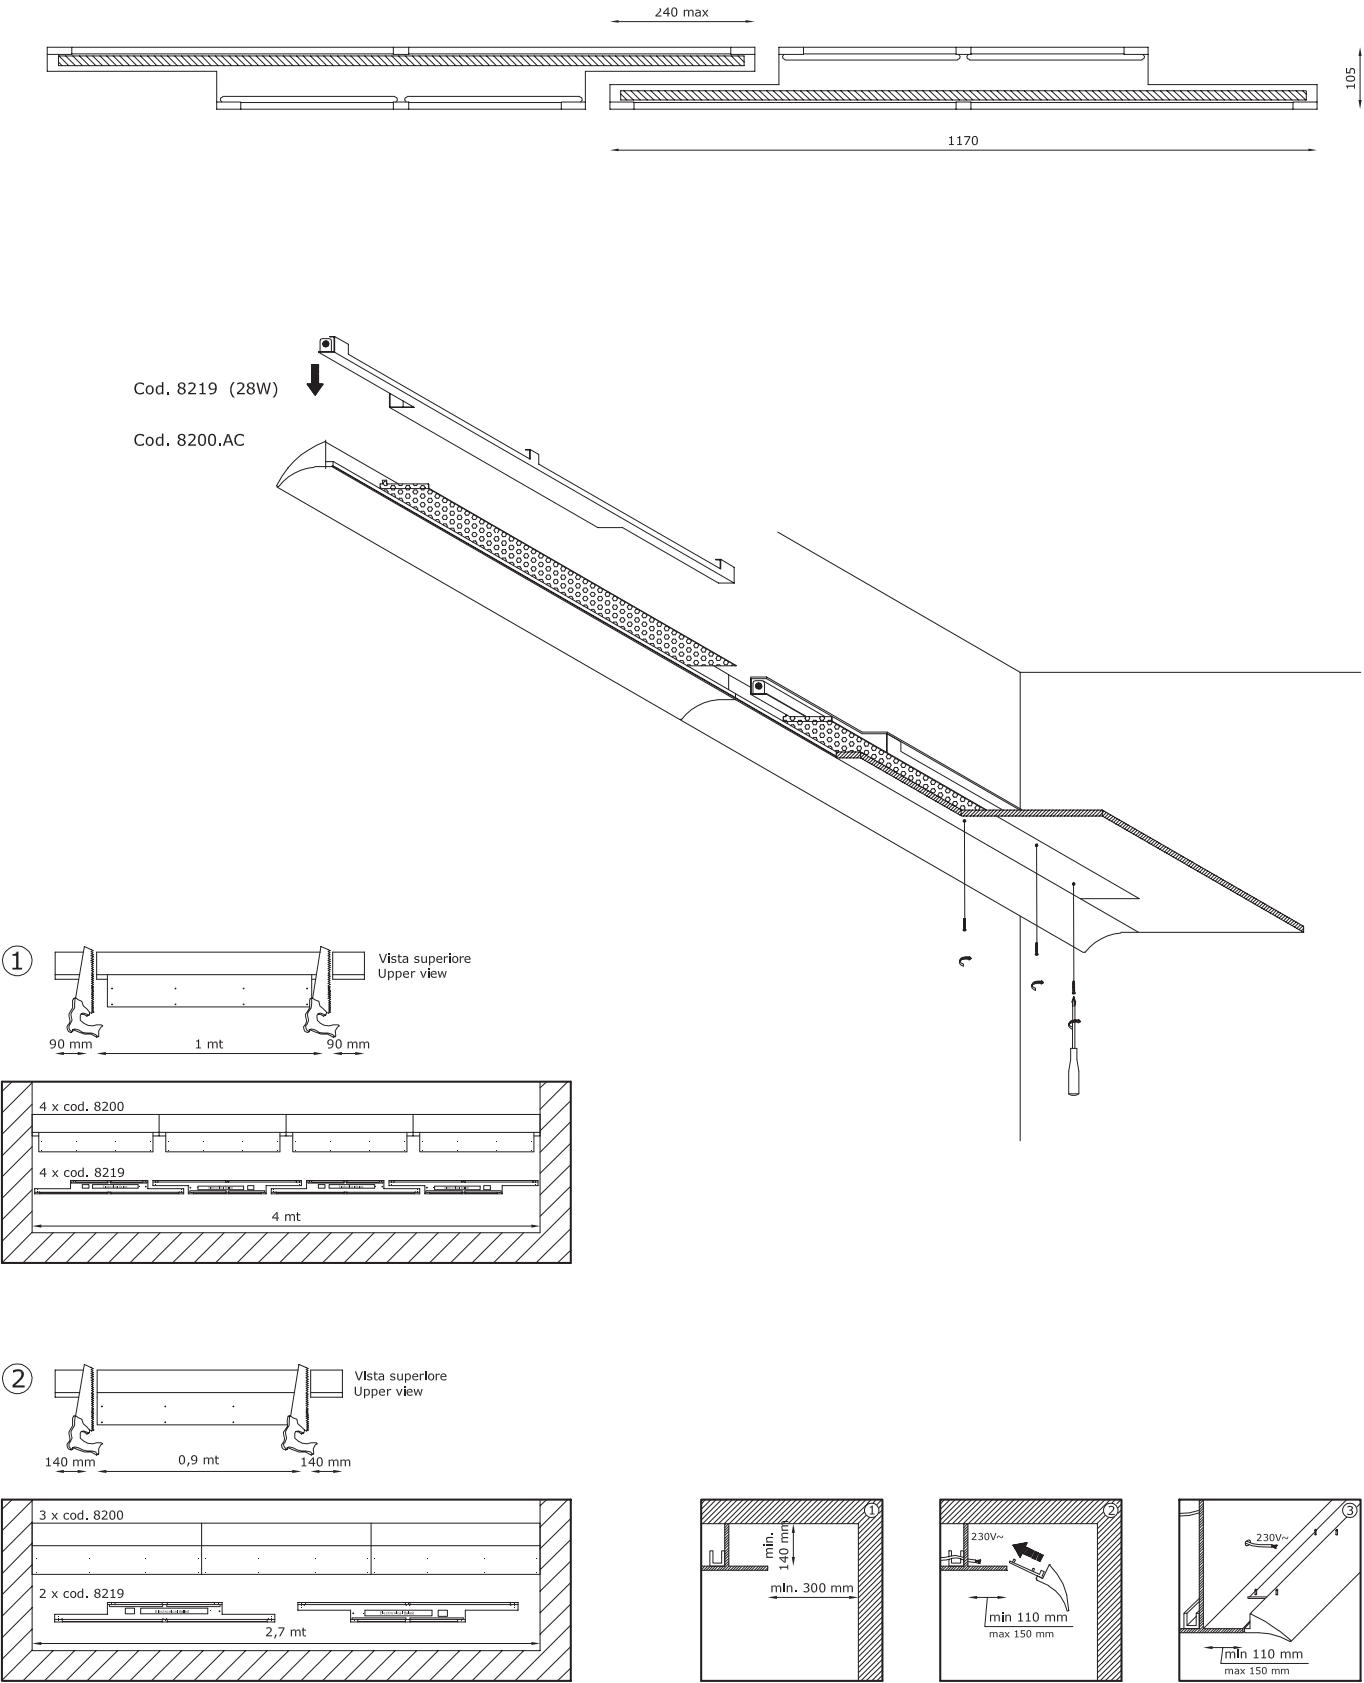

* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²