


The Esem 2.6 recessed 2W LED downlight, perfect for general and effect lighting. Featuring a discreet, elegant design, perfect for applications in the residential, commercial or hospitality spheres.



Ceiling Cut-Out: Ø1.18"  
Fixture Dimensions

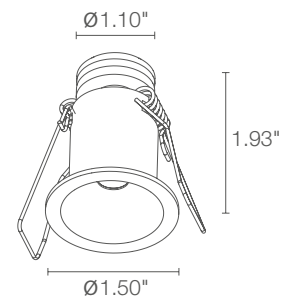

## TECHNICAL DATA

<b>Wattage / Input</b>	2W (24VDC)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body/Trim: Anodized aluminum EN AW 6082 Cable Length: 4.92'
<b>CCT</b>	2700K, 3000K, 4000K, 5000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	122 lm (3000K, 36°)
<b>Efficacy</b>	61 lm/W
<b>Optics</b>	16°, 36°, 80°
<b>Finishes</b>	White, Custom RAL (see below) (4 Stage Marine Grade Finish)
<b>Cut-Out Dimensions</b>	Ø1.18"
<b>Fixture Dimensions</b>	Ø1.50" x 1.93" h
<b>Fixture Weight</b>	0.20 lbs
<b>LED Source</b>	1 Power LED
<b>Lumen Maintenance</b>	L80 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	32°F to 113°F
<b>IP Rating</b>	IP40, IP44 Installed
<b>Impact Rating</b>	—

## ORDERING INFORMATION

Example: **ES2600FSB**. Power Supplies ordered separately.

ES2600			
Model No.	CCT	Optics	Finish
ES2600	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K	S - 16° M - 36° L - 80°	B - White C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00284</a>	Non-Dim	120-277VAC to 24VDC, 100W, Class 2	1-40
<a href="#">PPLT00543</a>	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	5-40

## Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00530</a>	L3DAE / L3D0	L3DA/L3D0	100%-1%	Hi-Lume™ 0.1% EcoSystem™ or 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-38

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715


Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00715</a>	ELV / TRIAC / 0-10V Dimming to 0.1%	120-277VAC to 24VDC, 96W, Class 2, WET/DAMP	1-38

For other power supply options consult factory.


## PHOTOMETRIC DATA

Note all Photometry is 3000K


**S** - 16°

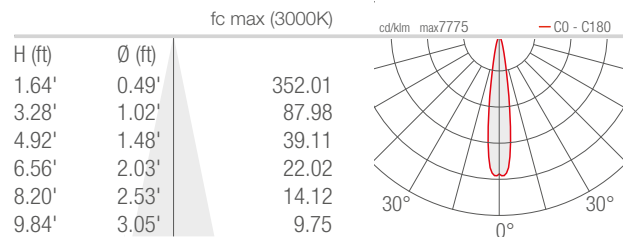

**M** - 36°

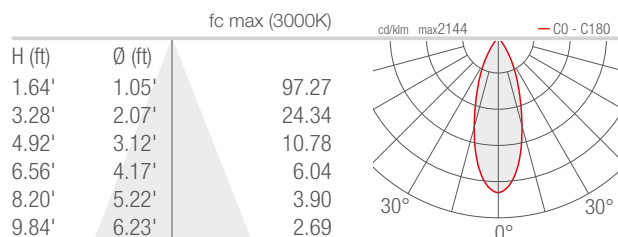

**L** - 80°

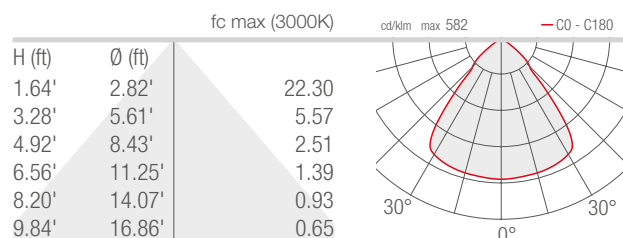

Job Name/Date:

Fixture Type Designation: