


The Esem 2.6 recessed 2W LED downlight, perfect for general and effect lighting. Featuring a discreet, elegant design, perfect for applications in the residential, commercial or hospitality spheres.



Ceiling Cut-Out: Ø1.18"
Fixture Dimensions



TECHNICAL DATA

Wattage / Input	2W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body/Trim: Anodized aluminum EN AW 6082 Cable Length: 4.92'
CCT	2700K, 3000K, 4000K, 5000K
CRI	>80
Delivered Lumens	122 lm (3000K, 36°)
Efficacy	61 lm/W
Optics	16°, 36°, 80°
Finishes	White, Custom RAL (see below)
Cut-Out Dimensions	Ø1.18"
Fixture Dimensions	Ø1.50" x 1.93" h
Fixture Weight	0.20 lbs
LED Source	1 Power LED
Lumen Maintenance	L80 >50,000hrs (Ta 25°C)
Color Consistency	1/4 ANSI BIN
Operating Temp.	32°F to 113°F
IP Rating	IP40, IP44 Installed
Impact Rating	—

ORDERING INFORMATION

Example: **ES2600FSB**. Power Supplies ordered separately.

ES2600			
Model No.	CCT	Optics	Finish
ES2600	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K	S - 16° M - 36° L - 80°	B - White C - Custom RAL (consult factory for "C")

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC


Part Number	Description	Input/Output	# of Fixtures
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-4
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-10
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-24
PPLT00627	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2, IP67	1-38
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-40
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	5-40

For other power supply options consult factory.


PHOTOMETRIC DATA

Note all Photometry is 3000K


S - 16°

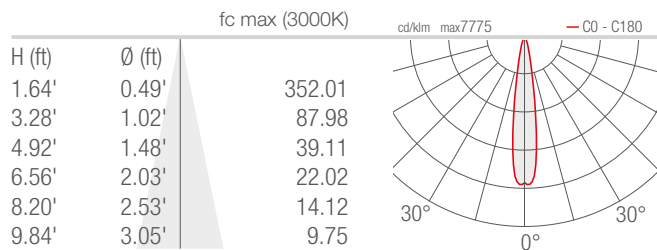

M - 36°

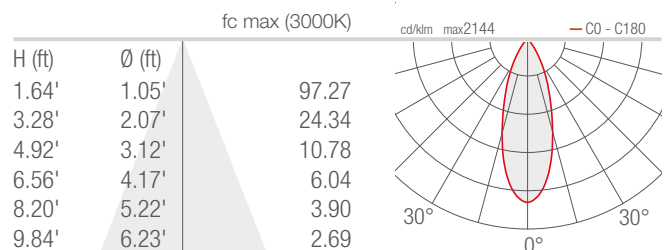

L - 80°

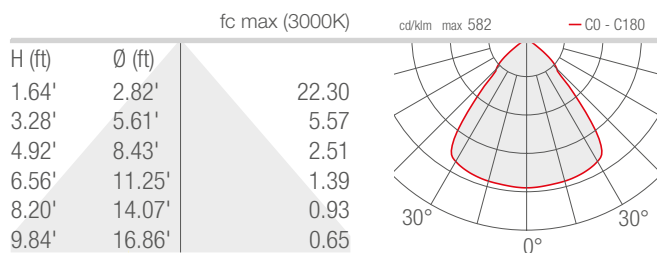

Job Name/Date:

Fixture Type Designation: