

# EXPRESSION DUO IP20


Expression Duo IP20 is a linear wall mounted fixture that has both an up and down light. Expression can be used in combination with Impression to create custom combinations of indirect lighting. The Expression is available in a 'Mono' version, used as an up OR down light also.



Ceiling Cut-Out: 50.98" x 4.53"  
Fixture Dimensions

## TECHNICAL DATA

<b>Wattage / Input</b>	23.1W (350mA or 120VAC)
<b>Power Supply</b>	Remote or Integral 0-10V
<b>Construction</b>	Body: CALCYT® plaster
<b>CCT</b>	2700K, 3000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	—
<b>Efficacy</b>	—
<b>Optics</b>	Fixed
<b>Finishes</b>	Paintable Plaster
<b>Fixture Dimensions</b>	50.79" l x 4.33" w
<b>Cut-out Dimension</b>	50.98" x 4.53"
<b>Color Consistency</b>	4-Step MacAdam
<b>IP Rating</b>	IP20

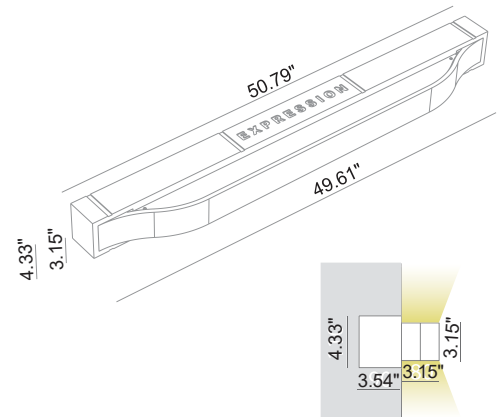

## ORDERING INFORMATION

Example: 319 65 100. Power Supplies and Accessories ordered separately.

Model No.	Description
319 29 000 - 2700K	23.1W, 3000 LM, Remote (driver sold separately), IP20 Indoor
319 29 100 - 3000K	23.1W, 3000 LM, Remote (driver sold separately), IP20 Indoor
319 65 000 - 2700K	23.1W, 3000 LM, Integral 0-10V, IP20 Indoor
319 65 100 - 3000K	23.1W, 3000 LM, Integral 0-10V, IP20 Indoor

Job Name/Date:

Fixture Type Designation:


## SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00480</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2	1-1

For other power supply options consult factory.

## REQUIRED ACCESSORIES - Installation

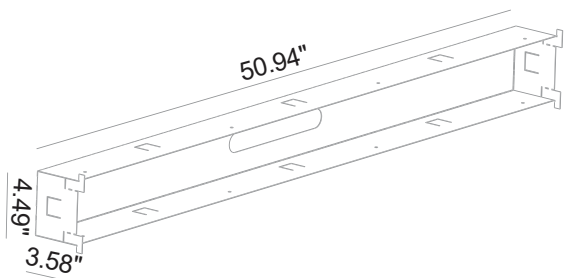

### 718 01 000

Required Outer Casing

Cut Out: 4.53" x 50.98"

Housing: perforated aluminum

Job Name/Date:

Fixture Type Designation: