

EXPRESSION MONO IP20


Expression Mono IP20 is a linear wall mounted fixture that used as an up OR down light. Expression can be used in combination with Impression to create custom combinations of indirect lighting. The Expression is available in a 'Duo' version, used as an up and down light also.



Ceiling Cut-Out: 4.53" x 50.98"
Fixture Dimensions

TECHNICAL DATA

Wattage / Input	23.1W (350mA or 120VAC)
Power Supply	Remote or Integral 0-10V
Construction	Body: CALCYT® plaster
CCT	2700K, 3000K
CRI	>80
Delivered Lumens	—
Efficacy	—
Optics	Fixed
Finishes	Paintable Plaster
Fixture Dimensions	50.79" l x 4.33" w
Cut-out Dimension	50.98" x 4.53"
Color Consistency	4-Step MacAdam
IP Rating	IP20

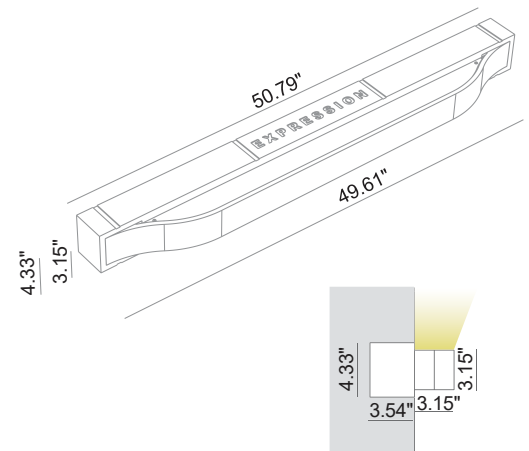

ORDERING INFORMATION

Example: 318 65 100. Power Supplies and Accessories ordered separately.

--

Model No.	Description
318 29 000 - 2700K	23.1W, 3000 LM, Remote (driver sold separately), IP20 Indoor
318 29 100 - 3000K	23.1W, 3000 LM, Remote (driver sold separately), IP20 Indoor
318 65 000 - 2700K	23.1W, 3000 LM, Integral 0-10V, IP20 Indoor
318 65 100 - 3000K	23.1W, 3000 LM, Integral 0-10V, IP20 Indoor

Job Name/Date:

Fixture Type Designation:


SUGGESTED POWER SUPPLIES

350mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00480	0-10V Dimming to 1.0%	120-277VAC to 350mA, 30W, Class 2	1-1

For other power supply options consult factory.

REQUIRED ACCESSORIES - Installation

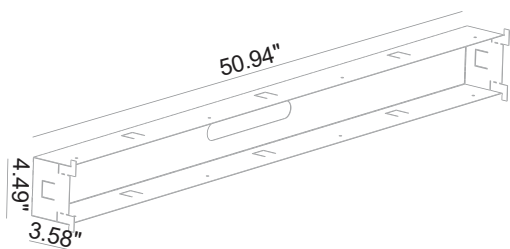

718 01 000

Required Outer Casing
Cut Out: 4.53" x 50.98"
Housing: perforated aluminum

Job Name/Date:

Fixture Type Designation: