











EYES

INDOOR RECESSED DOWNLIGHTS STARRY SKY, SHELVES, SHOWCASES AND FALSE CEILINGS

	CONSTANT CURRENT	CONSTANT VOLTAGE
<p>IDEAL FOR STARRY SKY</p> <p>2700K 3000K 4000K 5000K blue</p> <p>wide diffuse</p>	<p>Ø0.98 in</p>  <p>EYES 1.0 1W 350mA</p>	<p>Ø0.98 in</p>  <p>EYES 1.6 1W 24VDC</p>
	<p>0.98x0.98 in</p>  <p>EYES 1.2 1W 350mA</p>	<p>0.98x0.98 in</p>  <p>EYES 1.8 1W 24VDC</p>
<p>IDEAL FOR SHELVES AND SHOWCASES</p> <p>2700K 3000K 4000K</p> <p>narrow medium elliptical diffuse</p>	<p>Ø1.34 in</p>  <p>EYES 2.R 2.5W 700mA</p>	<p>Ø1.34 in</p>  <p>EYES 2.T 3W 24VDC</p>
	<p>1.38x1.38 in</p>  <p>EYES 2.S 2.5W 700mA</p>	<p>1.38x1.38 in</p>  <p>EYES 2.U 3W 24VDC</p>

< EYES 2.R
4000K, 2.5W, 23°, white



Project and light planning by / Studio Casolaro
Giuseppe e Ottavio
Offices, Foggia, Italy

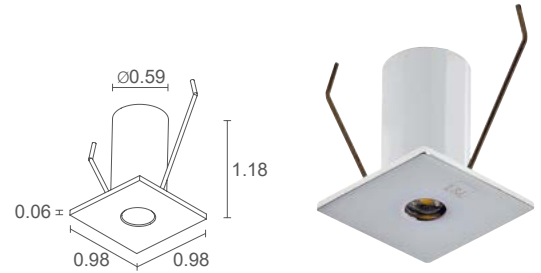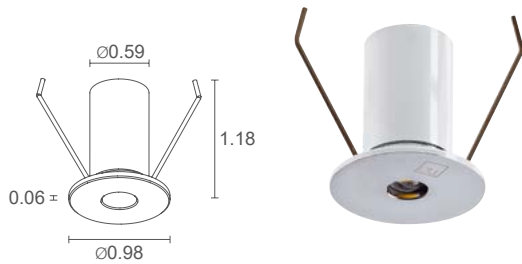

EYES 1.0



EYES 1.2



POWER / MODEL CODE

1W 350mA
EY1011 ■ **B** White
EY1011 ■ **C** Chrome
EY1011 ■ **D** Gold
EY1011 ■ **S** Satin
EY1011 ■ **N** Black



1W 350mA
EY1211 ■ **B** White
EY1211 ■ **C** Chrome
EY1211 ■ **D** Gold
EY1211 ■ **S** Satin
EY1211 ■ **N** Black

LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
OPTICS	F - 40° D - diffuse

LED COLOR	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K 1 - blue
OPTICS	F - 40° D - diffuse

LUMEN OUTPUT AT SOURCE	110 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	54 lm (3000K, 350mA, 40°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in brass
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 4.92 ft PVC cable FROR 2x0.01 Ø0.14 in
WIRING	series
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page

LUMEN OUTPUT AT SOURCE	110 lm (3000K, 350mA)
DELIVERED LUMEN OUTPUT	54 lm (3000K, 350mA, 40°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED color) 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminum trim in brass
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 4.92 ft PVC cable FROR 2x0.01 Ø0.14 in
WIRING	series
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page

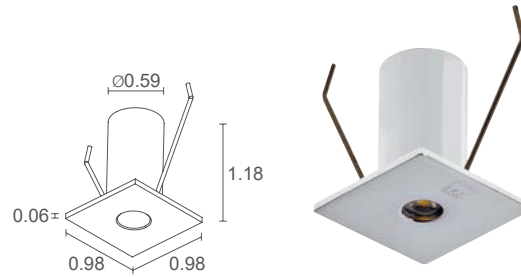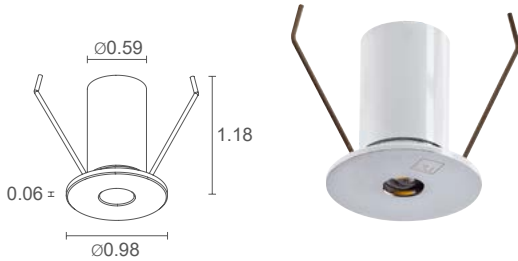

EYES 1.6

Ø 2.76 in
H 3.54 in
Ø 0.71 in

LED TECH
0.18 lbs IP40
EPS CASAMBI

1W 24VDC

EY1611 ■ ■ **B** White
EY1611 ■ ■ **C** Chrome
EY1611 ■ ■ **D** Gold
EY1611 ■ ■ **S** Satin
EY1611 ■ ■ **N** Black

■ **F** - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

■ **F** - 40°
D - diffuse

110 lm (3000K)

54 lm (3000K, 40°)

1 power LED
1/4 ANSI BIN (white LED color)
50000h L90 B10 (Ta 25°C)

body in anodized aluminum
trim in brass

Remote power supply required, not included

includes 4.92 ft PVC cable
FROR 2x0.01 Ø0.14 in

parallel

recessed (ceiling)

none

EYES 1.8

Ø 2.76 in
H 3.54 in
Ø 0.71 in

LED TECH
0.18 lbs IP40
EPS CASAMBI

1W 24VDC

EY1811 ■ ■ **B** White
EY1811 ■ ■ **C** Chrome
EY1811 ■ ■ **D** Gold
EY1811 ■ ■ **S** Satin
EY1811 ■ ■ **N** Black

■ **F** - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

■ **F** - 40°
D - diffuse

110 lm (3000K)

54 lm (3000K, 40°)

1 power LED
1/4 ANSI BIN (white LED color)
50000h L90 B10 (Ta 25°C)

body in anodized aluminum
trim in brass

Remote power supply required, not included


includes 4.92 ft PVC cable
FROR 2x0.01 Ø0.14 in

parallel

recessed (ceiling)

none





20°x40° optics
(Eyes 2.R / 2.T)



EYES 2.R

Ø 4.33 in
H 3.54 in

Ø 1.18 in

LED TECH 0.17 lbs IP40

EPS CASAMBI

POWER / MODEL CODE

2.5W 700mA
EY2R201000 ■ ■ **B** White
EY2R201000 ■ ■ **S** Satin
EY2R201000 ■ ■ **N** Black

LED COLOR

F - 2700K
5 - 3000K
9 - 4000K

OPTICS

S - 17°
M - 23°
L - 36°
W - 20°x40°
D - diffuse

LUMEN OUTPUT AT SOURCE	260 lm (3000K, 700mA)
DELIVERED LUMEN OUTPUT	160 lm (3000K, 700mA, 23°)
NO. AND TYPE OF LED	1 power LED 2-step MacAdam, 60000h L90 B10 (Ta 25°C)
MATERIAL	body in brass
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 4.92 ft PVC cable FROR 2x0.01 Ø0.14 in
WIRING	series
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
FEATURES	CRI >90



EYES 2.S

Ø 4.33 in
H 3.54 in

Ø 1.18 in

LED TECH 0.17 lbs IP40




EPS CASAMBI

2.5W 700mA
EY2S201000 ■ ■ **B** White
EY2S201000 ■ ■ **S** Satin
EY2S201000 ■ ■ **N** Black

F - 2700K
5 - 3000K
9 - 4000K

S - 17°
M - 23°
L - 36°
W - 20°x40°
D - diffuse


LUMEN OUTPUT AT SOURCE	260 lm (3000K, 700mA)
DELIVERED LUMEN OUTPUT	160 lm (3000K, 700mA, 23°)
NO. AND TYPE OF LED	1 power LED 2-step MacAdam, 60000h L90 B10 (Ta 25°C)
MATERIAL	body in brass
POWER SUPPLY UNIT	Remote power supply required, not included
POWER CABLES	includes 4.92 ft PVC cable FROR 2x0.01 Ø0.14 in
WIRING	series
MOUNTING	recessed (ceiling)
ACCESSORIES	see accessories page
FEATURES	CRI >90




20°x40° optics
(Eyes 2.S / 2.U)



EYES 2.T



EYES 2.U



3W 24VDC

EY2T001000 ■ **O** ■ **B** White
EY2T001000 ■ **O** ■ **S** Satin
EY2T001000 ■ **O** ■ **N** Black

3W 24VDC

EY2U001000 ■ **O** ■ **B** White
EY2U001000 ■ **O** ■ **S** Satin
EY2U001000 ■ **O** ■ **N** Black

■ **F** - 2700K
■ **5** - 3000K
■ **9** - 4000K

■ **F** - 2700K
■ **5** - 3000K
■ **9** - 4000K

■ **S** - 17°
M - 23°
L - 36°
W - 20°x40°
D - diffuse

■ **S** - 17°
M - 23°
L - 36°
W - 20°x40°
D - diffuse

260 lm (3000K)

160 lm (3000K, 23°)

1 power LED
 2-step MacAdam, 60000h L90 B10 (Ta 25°C)

body in brass

Remote power supply required, not included

includes 4.92 ft PVC cable
 FROR 2x0.01 Ø0.14 in

parallel

recessed (ceiling)

see accessories page

CRI >90

260 lm (3000K)

160 lm (3000K, 23°)

1 power LED
 2-step MacAdam, 60000h L90 B10 (Ta 25°C)

body in brass

Remote power supply required, not included


includes 4.92 ft PVC cable
 FROR 2x0.01 Ø0.14 in

parallel

recessed (ceiling)

see accessories page

CRI >90





ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC0202

Outer casing

(Eyes 2.R / 2.S / 2.T / 2.U)

EYES

INDOOR RECESSED


EYES 1.0

1.2


1.6

1.8

F - 40°

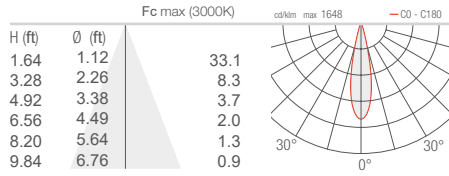

D - Diffuse

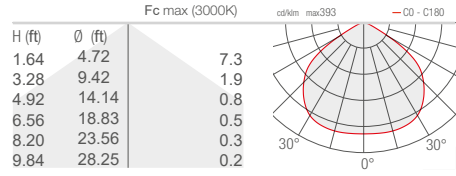


EYES 2.R

2.S


2.T

2.U


S - 17°

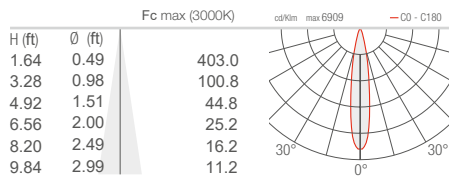


M - 23°

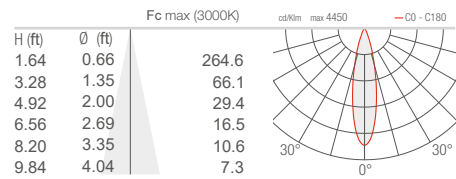

L - 36°

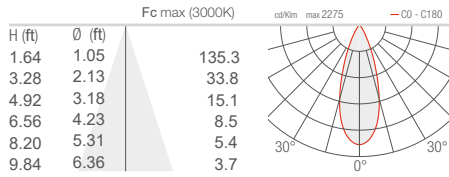

W - 20°x40°

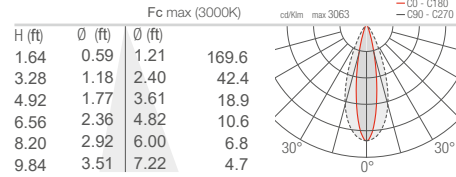

D - Diffuse

